


HDTVI Distributor LTAH5300T



Properties	
Physical Interface	BNC, BNC (3)
Input Level	> 500 mVp-p
Output Level	1 Vp-p
Input Auto Cable Equalization	1080 p, 720 p, supporting 100M75-5 cable input with distance of 100M
Input Format	1080 p 25/30, 720 p 25/30/50/60, compatible with V2.0 HDTVI
Input/Output Impedance	75 Ω
Output Format	1080 p 25/30, 720 p 25/30/50/60, compatible with V2.0 HDTVI
Input/Output Impedance	75 Ω
Output Auto Cable Equalization	1080 p, 720 p, supporting 100M75-5 cable input with distance of 100M
LED	Power LED, video source LED
Power Supply	12 VDC, 1A
Power Consumption	≤ 8 W
Working Humidity	10 % to 90 %
Working Temperature	-86° F to + 167° F
Dimensions (WxDxH)	2.0 × 1.2 × 1.0 "
Mounting Type	Independent


Physical Interface:

Front Panel

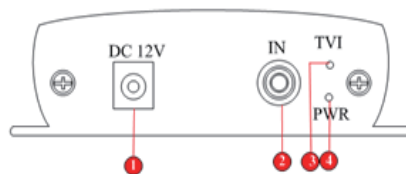

1. 12VDC Power Supply
2. 1-ch HDTVI video input
3. Video Source LED Indicator
4. Power LED

Rear Panel

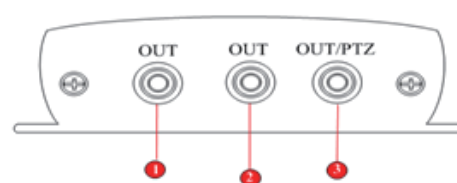

1. BNC Interface
2. BNC Interface
3. BNC Interface

©2016 LT Security, Inc. All Rights Reserved. White papers, data sheets, quick start guides, and/or user manuals are for reference only and may or may not be entirely up to date or accurate based upon the version or models. Product names mentioned herein may be the unregistered and/or registered trademarks of their respective owners.