


# CMHD3423DW


## HD1080P HD-TVI Outdoor Vandal Proof Camera

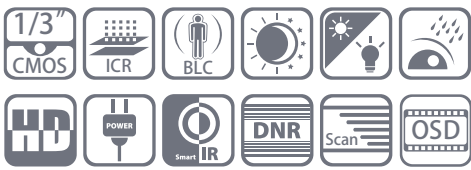

### Key features

- HD1080P Video Output
- Adopt HDTV Technology
- True Day/Night
- 2.8 - 12mm vari-focal lens
- 120dB True WDR, 3D DNR, Smart IR
- Up to 131ft(40m) IR distance
- OSD Menu via UTC technology with Platinum TVI DVR
- IP66 weatherproof & Vandal Proof
- CVBS Output
- 3-axis

### Dimensions

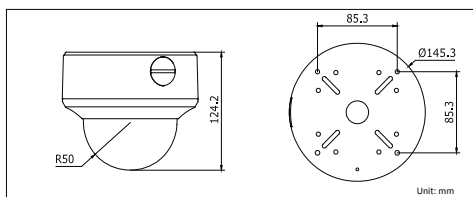

CMHD3423DW	
<b>Camera</b>	
Image Sensor	1 / 3" Sensor
Signal System	NTSC / PAL(Euro Version)
Effective Pixels	1920(H)*1080(V)
Min. Illumination	0.014 Lux @ (AGC ON),0 Lux with IR
Shutter speed	NTSC: 1/30 s(PAL: 1/25 s) to 1/50,000 s
Lens	2.8-12mm Angle of view: 92° - 32°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	NTSC:1080p@30fps/ PAL: 1080p@25fps
Video Output	1 CVBS Output, 1 HD TVI Output
S / N Ratio	More than 52dB
<b>Menu</b>	
Scene	Indoor, Outdoor, Indoor1, LOW-LIGHT
Camera ID	On/off (15 characters, position programmable)
AGC	Support
D/N Mode	Color/BW/EXT
White Balance	ATW, AWC-SET, Indoor, Outdoor, Manual
Privacy Mask	On/Off, maximum 8 zones
Motion Detection	On/Off, maximum 4 zones
BLC	Support
Anti-flicker	On/off
Language	English, Japanese, CHN1, CHN2, Korean, German, French, Italian,Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew and Arabic
Function	Eclipse, Digital noise reduction, Digital zoom(62x), Slow shutter, Mirror, Defog, Defect pixel correction, SMART D-ZOOM
<b>General</b>	
Working Temperature / Humidity	-4° F - 140° F (-20° C - 60° C) Humidity 90% or less (non-condensing)
Power Supply	12V DC, 24V AC
Power Consumption	Max. 6.5W
Weather Proof Ratings	IP66
IR Range	Up to 131ft(40m)
Impact Protection	IEC60068-2-75 test, Eh, 20J; EN50102, up to IK10.
Dimensions	φ 5.72" × 4.89" ( φ145.3 × 124.2 mm )
Weight	2.0lb(880g)