

HD-TVI Vandal Proof Dome Camera CMHD3423D



Key Features:


- HD 1080P Video Output
- Adopt HDTVI Technology
- True Day/Night
- Smart IR
- 131ft(40m) IR Distance
- OSD Menu via UTC technology with Platinum TVI DVR
- Aluminum housing
- Vandal-proof
- 3-axis








Dimensions:

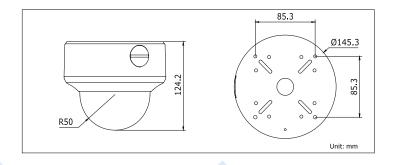



























HD-TVI Vandal Proof Dome Camera CMHD3423D

CAMERA	
Image Sensor	1/2.9" CMOS
Signal System	NTSC/PAL
Effective Pixels	1930(H)*1088(V)
Min. Illumination	0.1 Lux, 0 Lux with IR
Shutter Speed	1/30(1/25) s to 1/50,000 s
Lens	2.8 -12mm Varifocal Lens
	Angle of View: 105.2° -32.8°
Day & Night	ICR
Synchronization	Internal
Video Frame Rate	1080p@30fps/1080p@25fps
HD Video Output	1 HD-TVI Output
S/N Ratio	More than 52dB
MENU	
AGC	Support
D/N Mode	Color/ BW/ Smart
White Balance	ATW/MWB
Language	English
Function	Digital noise reduction, Mirror
GENERAL	
Working Temperature	-40 ° F - 140 ° F (-40 ° C - 60 ° C)
/Humidity	Humidity 90% or less (non-condensing)
Power Supply	DC 12V, AC 24V
Power Consumption	Max. 4W
Weather Proof Ratings	IP66
IR Range	Up to 131ft(40m)
Dimension	φ5.7" x4.9" (φ145.3 x 124.2mm)
Weight	2.0lb(880g)