


Platinum Dome HD-TVI Camera 3.1MP CMHD73T2W-28



Key Features:

- 3.1MP High Definition
- 2.8mm Fixed Lens
- True WDR 120dB
- 2 Matrix IR LED up to 65ft.(20m)
- DC 12V
- OSD menu via UTC technology with Platinum TVI DVR
- IP66 weatherproof
- Must be used with HD-TVI 3.0 DVRs

Dimensions:

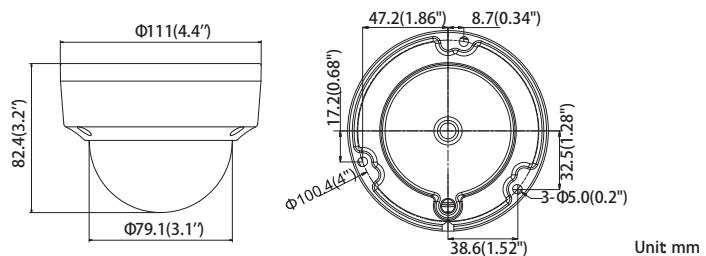

ICR



SMART IR



D&N



DNR



OSD



UTC



3.0
HD-TVI

Platinum Dome HD-TVI Camera 3.1MP CMHD73T2W-28

CAMERA	
Image Sensor	1/3"CMOS
Signal System	NTSC/PAL
Effective Pixels	2052(H)*1536(V)
Min. Illumination	0.01 Lux, 0 Lux with IR
Lens	2.8mm
Shutter Speed	1/30(1/25) s to 1/50,000 s
Day & Night	ICR
Synchronization	Internal
Video Frame Rate	1920x1536@18fps
HD Video Output	1 HD-TVI Output
S/N Ratio	More than 62dB
MENU	
AGC	Support
D/N Mode	Color/ BW/ SMART
White Balance	ATW/ MWB
BLC	Support
Function	True WDR,DNR, Mirror,SMART IR
GENERAL	
Working Temperature /Humidity	-40 ° F - 140 ° F (-40° C - 60 ° C) Humidity 90% or less (non-condensing)
Power Supply	DC 12V
Power Consumption	Max. 5W
Weather Proof Ratings	IP66
IR Range	Up to 65ft(20m)
Impact Protection	IK10
Dimension	4.4 "×3.3" (111.0×82.5 mm)
Weight	0.8lb(350g)