


Platinum Bullet HD-TVI Camera 3.1MP CMHR92T2-28





Key Features:

Dimensions:

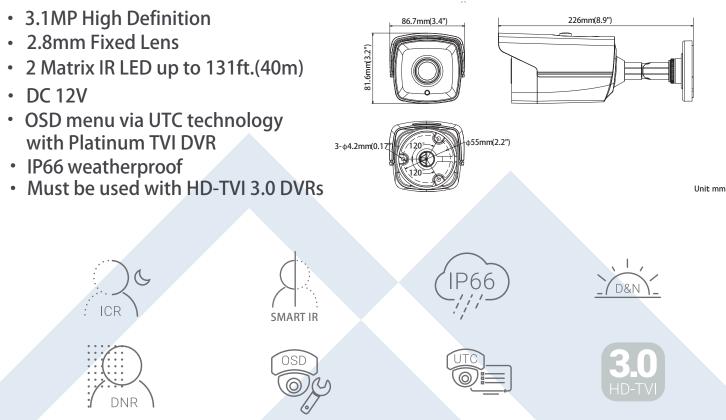

©2016 LT Security, Inc. | info@LTSecurityinc.com | www.LTSecurityinc.com





Platinum Bullet HD-TVI Camera 3.1MP CMHR92T2-28

CAMERA	
Image Sensor	1/3"CMOS
Signal System	NTSC/PAL
Effective Pixels	2052(H)*1536(V)
Min. Illumination	0.01 Lux, 0 Lux with IR
Shutter Speed	1/30(1/25) s to 1/50,000 s
Lens	2.8mm
Day & Night	ICR
Synchronization	Internal
Video Frame Rate	1920x1536@18fps
HD Video Output	1 HD-TVI Output
S/N Ratio	More than 62dB
MENU	
AGC	Support
D/N Mode	Color/ BW/ SMART
White Balance	ATW/ MWB
BLC	Support
Function	DNR, Mirror, SMART IR
GENERAL	
Working Temperature	-40 ° F - 140 ° F (-40 ° C - 60 ° C)
/Humidity	Humidity 90% or less (non-condensing)
Power Supply	DC 12V
Power Consumption	Max. 5W
Weather Proof Ratings	IP66
IR Range	Up to 131ft(40m)
Dimension	3.4 "×3.2" ×8.7" (86.7×81.6 × 226.0mm)
Weight	1.5lb(680g)

©2016 LT Security, Inc. All Rights Reserved. White papers, data sheets, quick start guides, and/or user manuals are for reference only and may or may not be entirely up to date or accurate based upon the version or models. Product names mentioned herein may be the unregistered and/or registered trademarks of their respective owners.