


# Platinum 4.1MP Network Motorized Lens Turret Camera CMIP1043W-Z




## Key Features:

- 4.1MP High Definition
- True 120dB Wide Dynamic Range
- 3D DNR, BLC, Intelligent H.264 Zip+
- Motorized lens
- IP67
- DC 12V/ PoE

## Dimensions:

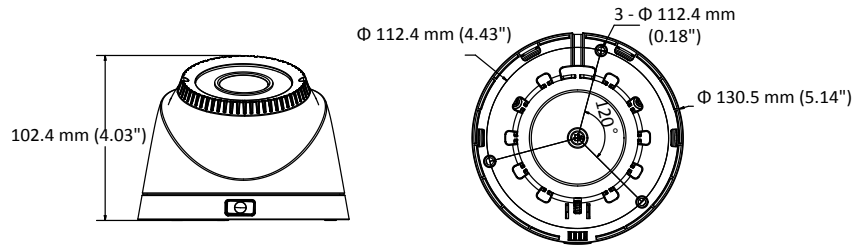

**WDR**  
120dB



# Platinum 4.1MP Network Motorized Lens Turret Camera CMIP1043W-Z

CAMERA	
Image Sensor	1/3" progressive scan CMOS
Min. Illumination	0.01Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Speed	1/3 s to 1/100,000 s, support slow shutter
Lens	2.8 mm to 12 mm @F1.4, horizontal field of view: 98° to 30°
Lens Mount	Φ 14
Day &Night	IR cut filter with auto switch
3-Axis Adjustment	Pan: 0° to 360° ; Tilt: 0° to 65° ; Rotation: 0° to 360°
DNR	3D DNR
Wide Dynamic Range	120 dB
Compression Standard	
Video Compression	Main stream: H.264 Zip+/H.264 Sub stream: H.264/MJPEG
H.264 Type	Main Profile/High Profile
Video Bit Rate	32 Kbps ~ 16 Mbps
Image	
Max. Resolution	2688 × 1520
Main Stream	50Hz: 20 fps (2688 × 1520), 20fps (2304 × 1296), 25 fps (1920 × 1080, 1280 × 720) 60Hz: 20 fps (2688 × 1520), 20fps (2304 × 1296), 30 fps (1920 × 1080, 1280 × 720)
Sub Stream	50Hz: 25fps (640 × 360, 352 × 288) 60Hz: 30fps (640 × 360, 352 × 240)
Image Settings	Support rotate mode. Brightness, contrast, saturation, and sharpness are adjustable via web browser or client software
Day/Night Switch	Auto/Scheduled
Others	Mirror, BLC (area configurable), region of interest (support 1 fixed region)
Network	
Network Storage	NAS (NFS,SMB/CIFS)
Detections	Motion Detection
Alarm	Video tampering, network disconnected, IP address conflicted
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
General Function	One-key Reset, Anti-Flicker, Heartbeat, Mirror, Password Protection, Privacy Mask, Watermark, IP Address Filter

# Platinum 4.1MP Network Motorized Lens Turret Camera CMIP1043W-Z

Interface	
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port
General	
Operating Conditions	-22 ° F ~ +140 ° F (-30 ° C ~ +60 ° C) Humidity 95% or less (non-condensing)
Power Supply	DC 12V ± 25%, PoE (802.3af)
Power Consumption	Max. 8.5 W/11 W (PoE)
IR Range	66ft to 100ft (20m to 30m)
Protection Level	IP67
Dimensions	Φ 5.14" × 4.03" (Φ 130.5 × 102.4 mm)
Weight	1.07lb. (485 g)