


Platinum 4.1MP Network Matrix IR Turret Camera CMIP3042W-6



Key Features:

- 4.1MP High Definition
- True 120dB Wide Dynamic Range
- 3D DNR, BLC, Intelligent H.264 Zip+
- High performance Matrix IR LED
- IP67
- DC 12V/ PoE

Dimensions:

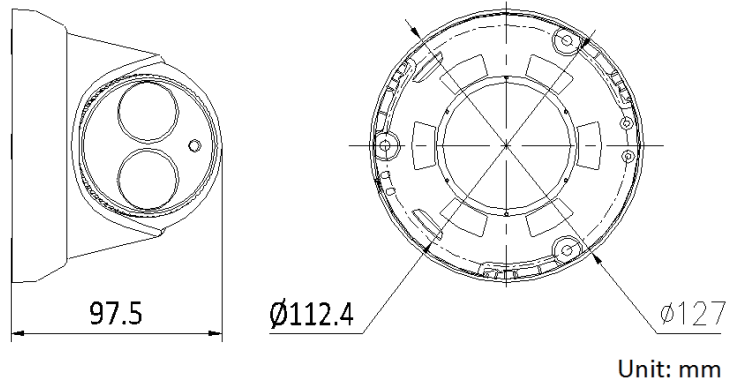

WDR
120dB



Platinum 4.1MP Network Matrix IR Turret Camera

CMIP3042W-6

| CAMERA | |
|-------------------------------|---|
| Image Sensor | 1/3" Progressive Scan CMOS |
| Min. Illumination | 0.01Lux @(F1.2, AGC ON), 0 Lux with IR |
| Shutter Speed | 1/3 s to 1/100,000s |
| Lens | 6mm, Angle of view:55.4° |
| Lens Mount | M12 |
| Day &Night | IR cut filter with auto switch |
| DNR | 3D DNR |
| Wide Dynamic Range | 120dB |
| Angle Adjustment | Pan:0° ~ 360°, Tilt: 0° ~ 75°, Rotation: 0° ~ 360° |
| Compression Standard | |
| Video Compression | H.264 / MJPEG/H.264 Zip+ |
| H.264 Type | Main Profile |
| Video Bit Rate | 32 Kbps ~ 8 Mbps |
| Dual streams | Support |
| Image | |
| Max. Resolution | 2688×1520 |
| Frame Rate | 60Hz: 20fps (2688×1520), 30fps (1920×1080), 30fps(1280×720) 50Hz: 20fps (2688×1520), 25fps(1920×1080), 25fps(1280×720) |
| Image Setting | Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser |
| BLC | Support, zone configurable |
| ROI Codec | Support |
| Network | |
| Network Storage | NAS (Support NFS,SMB/CIFS), ANR |
| Alarm Trigger | Motion detection, Tampering alarm, Network disconnect, IP address conflict, Storage exception |
| Protocols | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour |
| General | One-key reset, Flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, Anonymous access |
| Standard | ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI |
| Interface | |
| Communication Interface | 1 RJ45 10M/100M Ethernet port |
| Reset | Yes |
| General | |
| Working Temperature /Humidity | -22 °F ~ 140 °F (-30 °C ~ 60 °C) Humidity 95% or less (non-condensing) |
| Power Supply | DC12V ± 10%, PoE (802.3af) |
| Power Consumption | Max. 5.5W (Max. 7.5W with ICR on) |
| IR Range | Approx. 100ft (30 meters) |
| Weather Proof Ratings | IP67 |
| Dimensions | Φ5.0" × 3.8" (Φ127×97.5mm) |
| Weight | 1.5 lbs (670g) |