


CMIP3333-Z


3 MP Outdoor Dome Network Camera

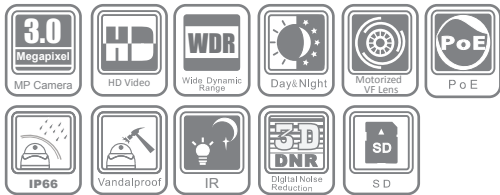

Key features

- 3.0 mega-pixel (2048 x 1536) with Full HD video
- 120dB wide dynamic range
- Super low-light
- Motorized VF lens
- 3D digital noise reduction
- Vandal-proof housing
- IP66 rating
- IR LEDs
- Built-in fan

Dimensions

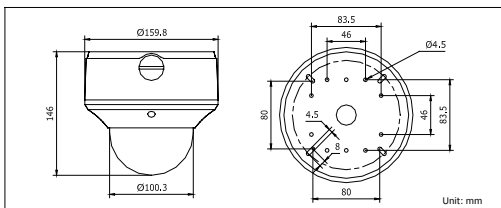

CMIP3333-Z	
Camera	
Image sensor	1/3" sensor
Min. illumination	0.1 lux @F1.2, AGC on 0.17 lux @F1.6, AGC on 0 lux with IR
Shutter time	1/25s ~ 1/100,000s
Lens	2.7 ~ 9 mm @F1.6, Angle of view: 101° ~ 30.4°
Lens mount	Φ14
Auto iris	DC drive
Day & Night	IR cut filter with auto switch
Wide dynamic range	120dB
Digital noise reduction	3D DNR
Compression Standard	
Video compression	H.264 / MPEG4 / MJPEG
Bit rate	32 Kbps ~ 16 Mbps
Dual stream	Yes
Image	
Max. Image Resolution	2048 × 1536
Frame rate	60Hz: 15fps (2048 × 1536), 30fps (1920 × 1080), 30fps (1280 × 720) 50Hz: 12.5fps (2048 × 1536), 25fps (1920 × 1080), 25fps (1280 × 720)
Image settings	Saturation, Brightness, Contrast adjustable by client software or web browser
Network	
Network storage	NAS (iSCSI optional)
Alarm trigger	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos (SIP, SRTP, IPv6 optional)
Security	User authentication, watermark
Interface	
Communication interface	1 RJ45 10 M / 100 M Ethernet interface
Video output	1 Vp-p composite output (75 Ω/RCA)
On-board storage	Built-in Micro SD slot, up to 32 GB
Reset button	Yes
General	
Operating conditions	-13 ° F ~ 140 ° F (-25 ° C ~ 60 ° C) Humidity 95% or less (non-condensing)
Power supply	24 VAC ± 10%, PoE (802.3af)
Power consumption	Max. 12W
Impact protection	IEC60068-2-75Eh, 50J; EN50102, up to IK10
Weather proof rating	IP66
IR range	Approx. 65 ~ 100ft (About 20~30m)
Dimensions	Φ6.29" × 5.75" (Φ159.8 × 146 mm)
Weight	4.62 lbs (2100g)