

# CMIP7122


## 2MP In-Ceiling Network Camera



### Key features

- 2.0 megapixel high resolution
- Full HD 1080P real-time video output
- Video Content Analytics(VCA)
- Region of Interest(ROI)
- 3D DNR & DWDR & BLC
- Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB

### Dimensions

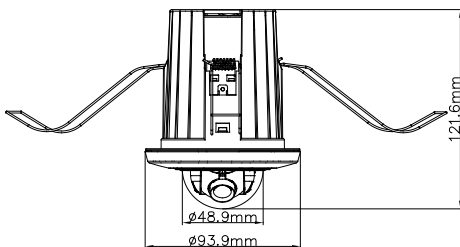

CMIP7122	
<b>Camera</b>	
Image sensor	1/3" sensor
Min. illumination	0.01 lux @F1.2, AGC ON, 0 lux with IR
Shutter time	1/3s ~ 1/100,000s
Lens	4mm Angle of view: 79°
Lens mount	M12
Day & night	Auto switch
Digital noise reduction	3D DNR
Wide Dynamic Range	Digital WDR
Angle Adjustment	Pan:0° - 355° , Tilt: 0° - 80°
<b>Compression Standard</b>	
Video compression	H.264 / MJPEG
H.264 Type	BaseLine Profile/Main Profile
Bit rate	32 Kbps ~ 8Mbps
Dual Stream	Yes
<b>Image</b>	
Max. Image Resolution	1920 × 1080
Frame rate	60Hz: 30fps (1920 × 1080), 30fps (1280 × 960), 30fps (1280 × 720) 50Hz: 25fps (1920 × 1080), 25fps (1280 × 960), 25fps (1280 × 720)
Image settings	Rotate mode, Saturation, Brightness, Contrast adjustable by client software or web browser
BLC	Yes, zone optional
ROI	Support
<b>Network</b>	
Network storage	Local storage: Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB. NAS (Support NFS,SMB/CIFS)
Alarm trigger	Line Crossing, Intrusion Detection, Motion detection, Dynamic analysis, Tampering alarm, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
General	One-key reset, Flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, Anonymous access
Standard	ONVIF, PSIA, CGI, ISAPI
<b>Interface</b>	
Communication interface	1 RJ45 10M/100M Ethernet interface
<b>General</b>	
Operating conditions	14° F ~ 104° F (-10° C ~ 40° C) humidity 95% or less (non-condensing)
Power supply	12 VDC ± 10%, PoE (802.3af)
Power consumption	Max. 4.5W
Dimension	Φ3.7" × 4.8" (Φ93.9 × 121.6mm)
Weight	0.4lbs(200g)