



# Platinum 2.1MP Network Motorized Lens Dome Camera CMIP7223-SZ



## Key Features:

- 2.1MP High Definition
- 2.7-12mm Motorized lens
- 3D DNR, BLC, DWDR
- Audio I/O, Alarm I/O
- IP67, Vandal-proof
- DC 12V/ PoE

## Dimensions:

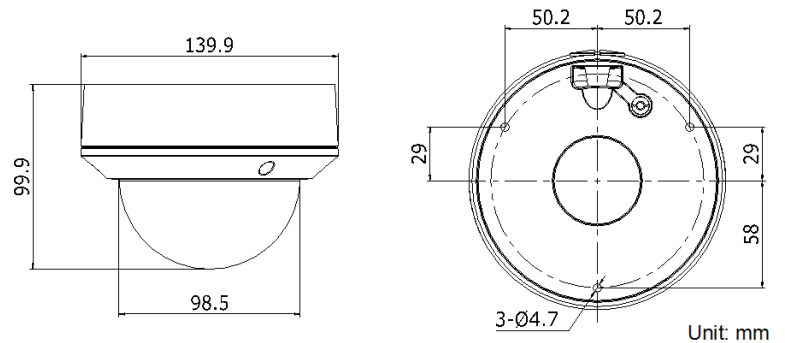

# Platinum 2.1MP Network Motorized Lens Dome Camera CMIP7223-SZ

CAMERA	
Image Sensor	1/2.7" Progressive Scan CMOS
Min. Illumination	0.01Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter Speed	1/3 s to 1/100,000 s
Lens	2.7-12mm @ F1.4, horizontal field of view: 113° to 33.8°
Lens Mount	Φ14
Day &Night	IR cut filter with auto switch
DNR	3D DNR
Wide Dynamic Range	Digital Wide Dynamic Range
Angle Adjustment	Pan:0° - 355°, Tilt: 0° - 75°, Rotation: 0° - 355°
Compression Standard	
Video Compression	H.264 / MJPEG
H.264 Type	Baseline Profile/Main Profile
Video Bit Rate	32 Kbps ~ 8 Mbps
Audio Compression	G.711/G.722.1/G.726/MP2L2
Audio Bit rate	64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)
Dual Streams	Support
Image	
Max. Resolution	1920 × 1080
Frame Rate	60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 50Hz: 25fps(1920 × 1080, 1280 × 960, 1280 × 720)
Sub Stream	60 Hz: 30 fps (320 x 240), 30 fps (352 x 288), 30 fps (640 x 480), 30fps(704 x 576) 50 Hz: 25 fps (320 x 240), 25 fps (352 x 288), 25 fps (640 x 480), 25fps(704 x 576)
Image Setting	Saturation, Brightness, Contrast, etc., adjustable by client software or web browser
BLC	Support, zone optional
ROI Codec	Support one customized region for each stream
Network	
Storage	Support Micro SD/SDHC/SDXC card (up to 128 GB) local storage and NAS (NFS,SMB/CIFS)
Detection	Intrusion Detection, Line Crossing Detection, Motion Detection
Alarm Trigger	Video Tempering Detection, Network Disconnected, IP Address Conflicted, HDD Full, HDD Error
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
General	Anti-Flicker, Mirror, Password Protection, Privacy Mask, Watermark, Heartbeat
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
Interface	
Communication Interface	1 RJ45 10M/100M Ethernet port
On-board storage	Built-in Micro SD/SDHC/SDXC slot, up to 128GB
Reset	Yes

# Platinum 2.1MP Network Motorized Lens Dome Camera CMIP7223-SZ

General	
Working Temperature /Humidity	-22 °F ~ 140°F (-30 °C ~ 60 °C) Humidity 95% or less (non-condensing)
Power Supply	DC12V ±10%, PoE (802.3af)
Power Consumption	Max. 5.5W
IR Range	Approx. 100ft (30 meters)
Weather Proof Ratings	IP67
Impact Protection	IEC60068-27 5Eh, 20J; EN50102, up to IK10
Dimensions	Φ 5.5" × 3.9" (Φ 140 × 99.9 mm)
Weight	2.20lbs (1000 g)