


Platinum 4.1MP Network Motorized Lens Dome Camera CMIP7243W-SZ




Key Features:

- 4.1MP High Definition
- True 120dB Wide Dynamic Range
- 3D DNR, BLC, Intelligent H.264 Zip+
- Audio I/O, Alarm I/O
- Motorized lens
- IP67, Vandal-proof
- DC 12V/ PoE

Dimensions:

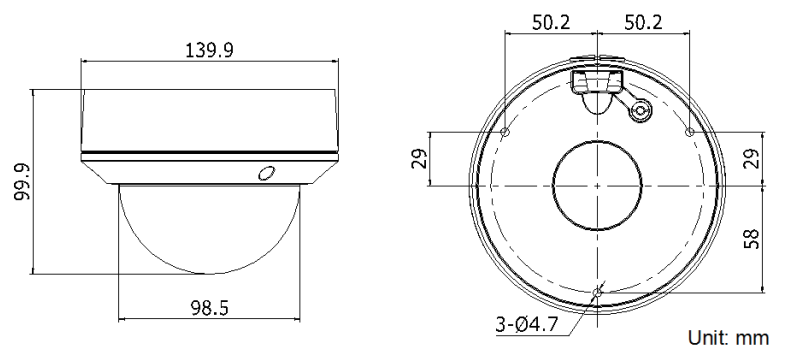

WDR
120dB



Platinum 4MP Network Motorized Lens Dome Camera CMIP7243W-SZ

| CAMERA | |
|-------------------------|---|
| Image Sensor | 1/3" Progressive Scan CMOS |
| Min. Illumination | 0.01Lux @(F1.2,AGC ON), 0.014 Lux @(F1.4,AGC ON), 0 Lux with IR |
| Shutter Speed | 1/3 s to 1/100,000s |
| Slow Shutter | Support |
| Lens | 2.8 - 12 mm @ F1.4, Motorized lens , Angle of view:112-33.8° |
| Lens Mount | Φ14 |
| Day &Night | IR cut filter with auto switch |
| DNR | 3D DNR |
| Wide Dynamic Range | 120dB |
| Angle Adjustment | Pan:0° - 355°, Tilt: 0° - 75°, Rotation: 0° - 355° |
| Compression Standard | |
| Video Compression | H.264 / MJPEG/H.264 Zip+ |
| H.264 Type | Main Profile |
| Video Bit Rate | 32 Kbps ~ 16 Mbps |
| Audio Compression | G.711/G.722.1/G.726/MP2L2 |
| Audio Bit rate | 64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2) |
| Image | |
| Max. Resolution | 2688×1520 |
| Frame Rate | 60Hz: 20fps (2688×1520), 30fps (1920×1080), 30fps(1280×720) 50Hz: 20fps (2688×1520), 25fps(1920×1080), 25fps(1280×720) |
| Image Setting | Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser |
| BLC | Support, zone configurable |
| ROI Codec | Support |
| Network | |
| Network Storage | NAS (Support NFS,SMB/CIFS), ANR |
| Alarm Trigger | Motion detection, Tampering alarm, Network disconnect, IP address conflict, Storage exception |
| Protocols | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour |
| General | One-key reset, Flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, Anonymous access |
| Standard | ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI |
| Interface | |
| Communication Interface | 1 RJ45 10M/100M Ethernet port |
| On-board storage | Built-in Micro SD/SDHC/SDXC slot, up to 128GB |
| Reset | Yes |

Platinum 4MP Network Motorized Lens Dome Camera CMIP7243W-SZ

| General | |
|-------------------------------|--|
| Working Temperature /Humidity | -22 °F ~ 140°F (-30 °C ~ 60 °C) Humidity 95% or less (non-condensing) |
| Power Supply | DC12V ± 10%, PoE (802.3af) |
| Power Consumption | Max. 5.5W |
| IR Range | Approx. 100ft (30 meters) |
| Weather Proof Ratings | IP67 |
| Impact Protection | IEC60068-275Eh, 20J; EN50102, up to IK10 |
| Dimensions | Φ 5.5" × 3.9"(Φ 140 × 99.9 mm) |
| Weight | 2.20lbs (1000 g) |