


# Platinum 5.0MP Network Matrix IR Dome Camera CMIP7352W-28




## Key Features:

- 5.0MP High Definition
- True 120dB Wide Dynamic Range
- 3D DNR, BLC, Intelligent H.264 Zip+, H.265, H.265+
- High performance Matrix IR LED
- IP67, Vandal-Proof
- DC 12V/ PoE

## Dimensions:

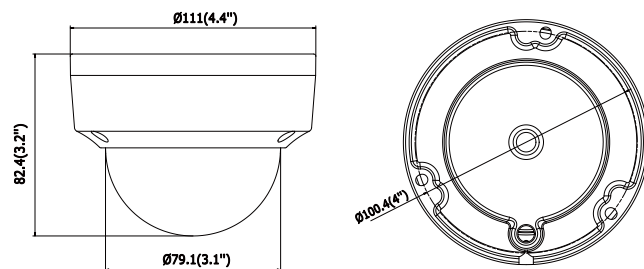

**WDR**  
120dB



# Platinum 5.0MP Network Matrix IR Dome Camera

## CMIP7352W-28

| CAMERA               |                                                                                                                                                                                  |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor         | 1/2.9" Progressive Scan CMOS                                                                                                                                                     |
| Min. Illumination    | 0.01Lux @ (F1.2, AGC ON), 0 Lux with IR                                                                                                                                          |
| Shutter Speed        | 1/3 s to 1/100,000 s                                                                                                                                                             |
| Lens                 | 2.8mm, Angle of view:80°                                                                                                                                                         |
| Lens Mount           | M12                                                                                                                                                                              |
| Day & Night          | IR cut filter with auto switch                                                                                                                                                   |
| DNR                  | 3D DNR                                                                                                                                                                           |
| Wide Dynamic Range   | 120dB                                                                                                                                                                            |
| Angle Adjustment     | Pan:0° ~ 355°, Tilt: 0° ~ 75°, Rotation: 0° ~ 355°                                                                                                                               |
| Compression Standard |                                                                                                                                                                                  |
| Video Compression    | Main stream: H.265/H.264<br>Sub stream: H.265/H.264/MJPEG<br>Third stream: H.265/H.264                                                                                           |
| H.264 Type           | Main Profile/High Profile                                                                                                                                                        |
| H.264 Zip+           | Support                                                                                                                                                                          |
| H.265 Type           | Main Profile                                                                                                                                                                     |
| H.265+               | Support                                                                                                                                                                          |
| Video Bit Rate       | 32 Kbps ~ 16 Mbps                                                                                                                                                                |
| Image                |                                                                                                                                                                                  |
| Max. Resolution      | 2560 × 1920                                                                                                                                                                      |
| Main Stream          | 50Hz: 20 fps (2560 × 1920), 25 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720)<br>60Hz: 20 fps (2560 × 1920), 30 fps (2560 × 1440, 2048 × 1536, 1920 × 1080, 1280 × 720) |
| Sub Stream           | 50Hz: 25fps (640 × 360, 352 × 288)<br>60Hz: 30fps (640 × 360, 352 × 240)                                                                                                         |
| Third Stream         | 50Hz: 25fps (1280 × 720)<br>60Hz: 30fps (1280 × 720)                                                                                                                             |
| Image Enhancement    | BLC/3D DNR                                                                                                                                                                       |
| ROI                  | Support 1 fixed region for each stream, and face dynamic tracking                                                                                                                |
| Image Settings       | Support rotate mode. Brightness, contrast, saturation, and sharpness are adjustable via web browser and client software                                                          |
| Target Cropping      | Support                                                                                                                                                                          |
| Day/Night Switch     | Auto/Scheduled                                                                                                                                                                   |
| Network              |                                                                                                                                                                                  |
| Network Storage      | Support microSD/SDHC/SDXC card (128G), local storage and NAS (NFS,SMB/CIFS), ANR                                                                                                 |
| Alarm Trigger        | Motion Detection, Tampering Alarm, Network Disconnected, IP Address Conflict, Illegal Login, HDD full, HDD error                                                                 |
| Protocols            | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6                                                     |
| Standard             | ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI                                                                                                                                   |
| General Function     | One-key Reset, Anti-Flicker, Heartbeat, Mirror, Password Protection, Privacy Mask, Watermark, IP Address Filter                                                                  |

# Platinum 5.0MP Network Matrix IR Dome Camera

## CMIP7352W-28

| Interface               |                                                                                  |
|-------------------------|----------------------------------------------------------------------------------|
| Communication Interface | 1 RJ45 10M/100M self-adaptive Ethernet port                                      |
| On-board Storage        | Built-in microSD/SDHC/SDXC slot, up to 128 GB                                    |
| General                 |                                                                                  |
| Operating Conditions    | -22 ° F ~ +140 ° F (-30 ° C ~ +60 ° C )<br>Humidity 95% or less (non-condensing) |
| Power Supply            | DC 12V $\pm$ 25%, PoE(802.3af)                                                   |
| IR Range                | Up to 100ft(30m)                                                                 |
| Protection Level        | IP67, IK10                                                                       |
| Dimensions              | $\Phi$ 4.4" $\times$ 3.2" ( $\Phi$ 111 $\times$ 82.4 mm)                         |
| Weight                  | 1.1 lb. (500 g)                                                                  |