


Platinum 1.3MP Network People Counting Camera CMIP7812W




Key Features:

- Support real-time people entering/ exiting data
- Up to 1.3 Megapixel high resolution
- True 120dB Wide Dynamic Range
- 3D DNR, BLC, Defog
- Audio I/O, Alarm I/O
- DC 12V

Dimensions:

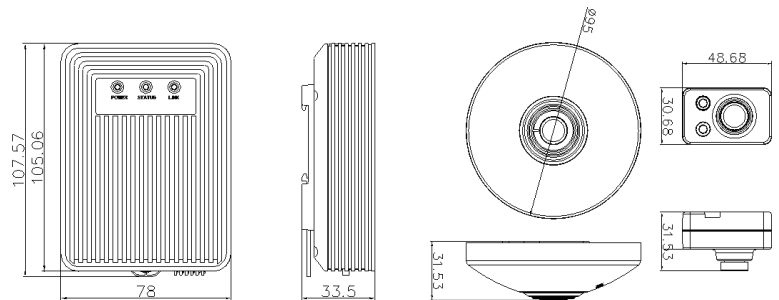

WDR
120dB



Platinum 1.3MP Network People Counting Camera CMIP7812W

CAMERA	
Image Sensor	1/3" Progressive Scan CMOS
Min. Illumination	Color: 0.01 Lux @ (F1.2, AGC ON), 0.028 Lux @ (F2.0, AGC ON) B/W: 0.001 Lux @ (F1.2, AGC ON), 0.0028 Lux @ (F2.0, AGC ON)
Shutter Speed	1/1s ~ 1/100,000s
Slow Shutter	Support
Lens	2.8mm/F2.0, horizontal FoV: 92.5°
Day & Night	Electronic
DNR	3D DNR
Wide Dynamic Range	True 120dB Wide Dynamic Range
Lens Cable Length	2 meters
Compression Standard	
Video Compression	H.264 / MJPEG/MPEG4
H.264 Type	Baseline Profile / Main Profile / High Profile
Video Bit Rate	32 Kbps ~ 16 Mbps
Audio Compression	G.711/G.722.1/G.726/MP2L2
Audio Bit rate	64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)
Image	
Max. Resolution	1280 x 960
Frame Rate (main stream)	60Hz: 30fps (1280 x 960), (1280 x 720) 50Hz: 25fps(1280 x 960), (1280 x 720)
Frame Rate (sub stream)	25/30fps (VGA, 4CIF, CIF)
Frame Rate (third stream)	60Hz: 30fps (1280 x 960) 50Hz: 25fps(1280 x 960)
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
BLC	Support, zone configurable
ROI Codec	Support
Defog	Yes
HLC	Yes
EIS	Yes
Day/Night Switch	Auto/Schedule/Triggered by Alarm In
Picture Overlay	LOGO picture can be overlaid on video with 128x128 24bit bmp format
Interface	
Audio Interface	1 x 3.5mm audio input (Mic in / Line in) / output external interface
Communication Interface	1 x RJ45 10M/100M Ethernet interface/1 RS232/1 RS-485
Alarm I/O	1/1

Platinum 1.3MP Network People Counting Camera CMIP7812W

Network	
Network Storage	NAS (NFS,SMB/CIFS)
Alarm Trigger	Intrusion detection, audio exception detection, defocus detection, motion detection, face detection, dynamic analysis, tampering alarm, network disconnect, IP address conflicts, storage full, storage error
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Standard	ONVIF, PSIA, CGI, ISAPI
Common features	Reset, flickerless, three streams, heartbeat, mirror, password protection, video masking, watermark, anonymous login, IP address filtering
People Counting	
People Counting	People entering and exiting data can be accounted, displayed and exported
	People counting data can be displayed on screen in real time and exported day/week/month/year excel chart (with SD card/NAS/Storage Server/Platform)
General	
Working Temperature /Humidity	-22 °F ~ 140°F (-30 °C ~ 60 °C)
	Humidity 95% or less (non-condensing)
Power Supply	DC12V ± 10%
Power Consumption	Max. 6.5W
Dimensions	Main unit: 4.2" x 3.1" x 1.3"(107.6 x 78 x 33.5mm) Lens: 1.9" x 1.2" x 1.2"(48.7 x 30.7 x 31.5mm) Lens cover : Φ3.7" x 1.2"(Φ95 x 31.5mm)
Weight	1.4lbs (615 g)