



Bullet Type XI Network Camera


6. Secure the junction box in the wall/ceiling with screws



7. Hook the camera to the junction box with the safety rope and connect the cables to the camera




8. Secure the camera to the junction box with the screws

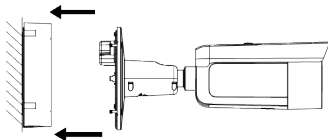

9. Adjust the view angle

- 1). Loosen the lock screw using the supplied Allen wrench.
- 2). Adjust the view angle of the camera. The adjusting range of the panning is from 0° to 360°, the tilting is from 0° to 90° and the rotation is from 0° to 360°.
- 3). Tighten the lock screw.

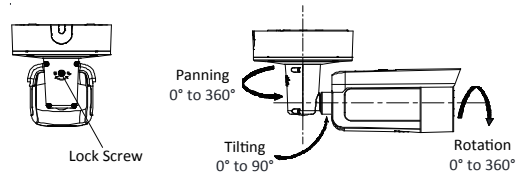

10. Adjust zoom and focus

You can adjust the zoom and focus level on PTZ control panel by visiting the camera via web browser or client software.

PTZ



For detailed instructions of further configuration, please refer to the user manual of network camera