

LTD7204A-HV/7208A-HV/7216A-HV


Enterprise Series- Hybrid DVRs



KEY FEATURES

- H.264 video compression
- Up to WD1(960*576) resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- Dual-stream
- Up to 4/8/16-ch synchronous playback
- NTP, SMTP, NFS, UPnP and iSCSI protocols

Rear Panel of LTD7204A-HV

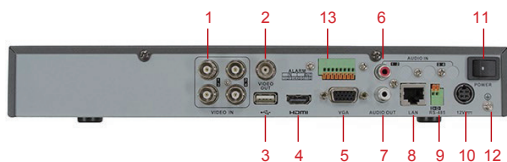

1. Video in
2. Video out
3. USB interface
4. HDMI interface
5. VGA interface
6. Audio in, RCA connector
7. Audio out, RCA connector
8. LAN network interface
9. RS-485 serial interface
10. 12VDC power input
11. Power switch
12. GND
13. Alarm in/out

	LTD7204A-HV	LTD7208A-HV	LTD7216A-HV
Video/Audio input			
Video compression	H.264		
Video input	4CH Analog+1CH IP@720P 8CH Analog+2CH IP@720P 16CH Analog+2CH IP@720P		
Video input interface	BNC (1.0 Vp-p, 75 Ω), PAL / NTSC self-adaptive		
Audio compression	G.711u		
Audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)		
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ) (using the audio input)		
Video/Audio output			
HDMI / VGA output	1-ch, resolution: 1080P: 1920×1080/60Hz; SXGA: 1280×1024/60Hz; 720P: 1280×720/60Hz; XGA: 1024×768/60Hz		
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: NTSC: 704 × 480,PAL: 704 × 576		
Encoding resolution	WD1 / 4CIF / 2CIF / CIF / QCIF		
Frame rate	WD1 / 4CIF / 2CIF @15 fps(N); CIF / QCIF @ /30 fps (N)	WD1 / 4CIF / 2CIF @ 15 fps; CIF / QCIF @30 fps (N)	WD1 @ 8 fps; 4CIF / 2CIF @ 10 fps; CIF / QCIF @ 30 fps (N)
Video bit rate	32Kbps~3072Kbps,or use defined(Max.3072Kbps)		
Audio output	1-ch, RCA (Linear, 1 kΩ)		
Audio bit rate	64 Kbps		
Dual-stream	Support; Sub-stream @ CIF / QCIF		
Stream type	Video, Video & Audio		
Synchronous playback	4-ch	8-ch	16-ch
Hard disk			
SATA	1 SATA interface		
Capacity	Up to 4TB capacity		
External interface			
Network interface	1, RJ45 10M / 100M Ethernet interface		
Serial interface	1 RS-485 interface, half-duplex		
USB interface	2, USB2.0		
General			
Power supply	12 VDC		
Consumption	≤ 10 W	≤ 10 W	≤ 15 W
Working temperature	-10 °C ~ +55 °C(14°F~131°F)		
Working humidity	10% ~ 90%		
Chassis	Standalone 1U chassis		
Dimensions	315 × 210 × 45 mm(12.4"×8.3"×1.8")		
Weight	≤ 2 kg(4.4lb) (without hard disk or DVD-R/W)		