


Network Access Controller

LTK2602




Video Solutions for Security Professionals™

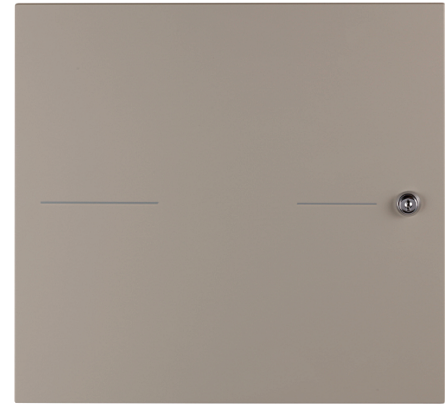

Key Features:

- 32-bit high-speed processor
- TCP/IP network communication, with self-adaptive; network interface. The communication data is encrypted to ensure information security;
- Massive storage with with 100,000(can be expanded to 200,000) cards information and 300,000 (can be expanded to 600,000) access control events;
- Supports multi-door interlocking function, anti-passback function, multi-card function, first card function, super card and super password function;
- Data can be permanently saved when the access controller is powered off.

Topological Graph

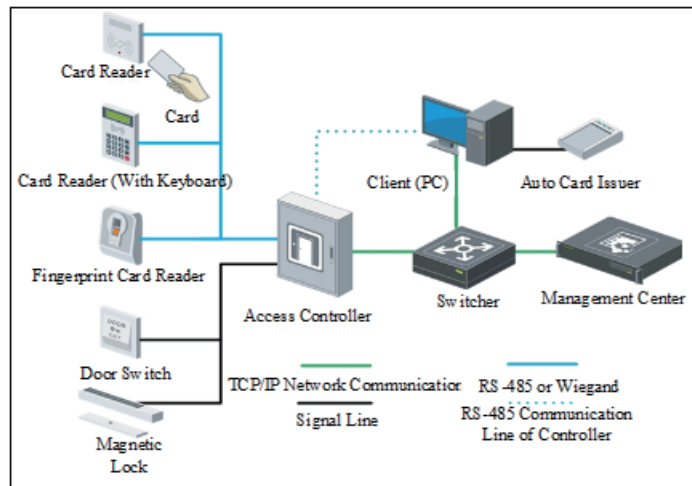

Properties

Working Voltage	AC 100-240V
Power Dissipation (with Load)	≤ 100W
Processor	32-bit
Capacity	16M
Uplink Communication Interface	TCP/IP Network Interface and RS-485 Interface
Downlink Communication Interface	RS-485 and Wiegand (w26/w34)
Storage	cards information: 100,000(200,000 expandable); access control events: 300,000 (600,000 expandable)
LED Indicator	Power Supply Status, Communication Status, Abnormal Status
Built-in Clock	Yes
Accessible Card Reader	4 Card Readers (RS485 Interface) and 4 Card Readers (Wiegand Interface) Connectable
Input Interface	Alarm Input × 4, Door Magnetic × 2, Door Switch × 2, Case Input × 4, Tamper-proof × 1
Output Interface	Door Switch Relay × 2, Alarm Relay × 2
Working Temperature	-4° F ~ +149° F (-20° C to +65° C)
Working Humidity	10 % to 90 % (Non-Condensing)
Dimensions (L×W×H)	14.6"x13.6"x3.5"(370mmx345mmx90mm)
Certification	CE, FCC

©2017 LT Security, Inc. All Rights Reserved. White papers, data sheets, quick start guides, and/or user manuals are for reference only and may or may not be entirely up to date or accurate based upon the version or models. Product names mentioned herein may be the unregistered and/or registered trademarks of their respective owners.