

Platinum 8 Channel Wireless NVR LTN8208-W




Key Features:

- Up to 8 network cameras can be connected
- Support live view, storage, and playback of the connected camera with up to the resolution of 6 megapixels
- Up to 6-ch can be live viewed simultaneously at resolution of 1080P
- Up to 8-ch synchronous playback and reverse playback
- Support HDD quota mode

Rear Panel:

1. LAN Interface (1 ~ 3)
2. WAN Interface
3. USB Interface
4. HDMI
5. Power

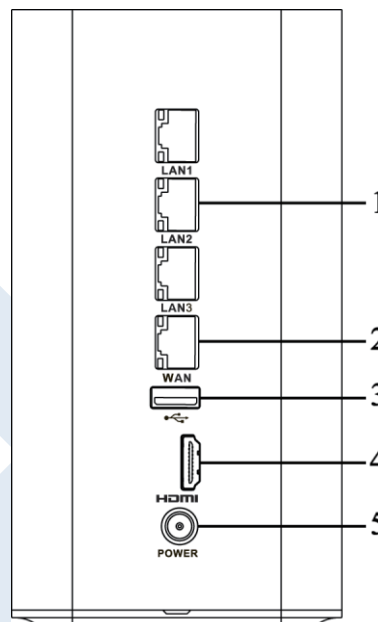

Platinum 8 Channel Wireless NVR

LTN8208-W

Video/Audio Input	
IP video Input	8-CH
Video Compression	H.264, MPEG4
Protocol	LTS, ACTi, ARECONT, AXIS, BOSCH, BRICKCOM, CANONZHUNT, ONVIF (version 2.4), PANASONIC, PELCO, PSIA, RTSP,SAMSUNG, SANYO, SONY, VIVOTEK ,ZAVIO
Network	
Incoming Bandwidth	50Mbps
Outgoing Bandwidth	80Mbps
Protocol	IPv6, UpnP, SNMP, NTP, SADP, DDNS, SMTP, NFS, iSCSI
Video/Audio Output	
Recording Resolution	3MP/1080P /UXGA /720P /VGA /4CIF /DCIF /2CIF /CIF /QCIF
HDMI Output (with audio output)	1-CH, resolution: 1920×1080P /60Hz, 1600 ×1200 /60Hz, 1280×1024 /60Hz, 1280×720 /60Hz, 1024×768 /60Hz
Playback Resolution	3MP/1080P /UXGA /720P /VGA /4CIF /DCIF /2CIF /CIF /QCIF
Synchronous Playback	8-CH
Record	
Record Type	Manual, Continuous, Motion Detection, Alarm, Motion Detection & Alarm, Motion Detection Alarm, VCA
Playback Type	Instant Playback, Normal Playback, Event Playback, Tag Playback, Log Playback, Smart Playback, External Playback
Backup Mode	Normal, Event
Hard Disk	
SATA	1 SATA interface for 1 HDD
Capacity	2.5-inch, 500G / 1T,Pre-installed 1T
External Interface	
Network Interface	1 RJ-45 10 /100 Mbps WAN interface; 3 RJ-45 10 / 100M LAN interfaces
USB Interface	1 ×USB 3.0
Wireless	
Frequency Band	2.4GHz
Antenna Structure	2 ×2MIMO
Transmission Rate	300Mbps
Transmission Standard	Transmission Standard
GENERAL	
Power Supply	12VDC
Consumption	≤12W
Working Temperature	32°F - 140°F (0 °C - +40 °C)
Working Humidity	10% - 90%
Dimensions (WxDxH)	3.4 ×3.4 ×6.2in (87 ×87 ×157mm)
Weight	1.2lb (≤0.53kg)