

Embedded Hybrid NVR LTN8708T-HT




Key Features:

- Support H.264 Zip+
- Support TVI /AHD / CVI/ CVBS/IP cameras
- CVBS output improves compatibility at the most possibility
- Long distance transmission over twisted-pair cable & coax cable
- Full channel recording at up to 3MP resolution

Rear Panel:

- | | | |
|------------------|------------------|------------------|
| 1. Video In | 6. Audio Out | 11. Power Switch |
| 2.USB Interface | 7. LAN | 12. Alarm in/out |
| 3.Video Out | 8. Audio In | 13. GND |
| 4. HDMI | 9. RS-485 Serial | |
| 5. VGA Interface | 10. DC 12V | |

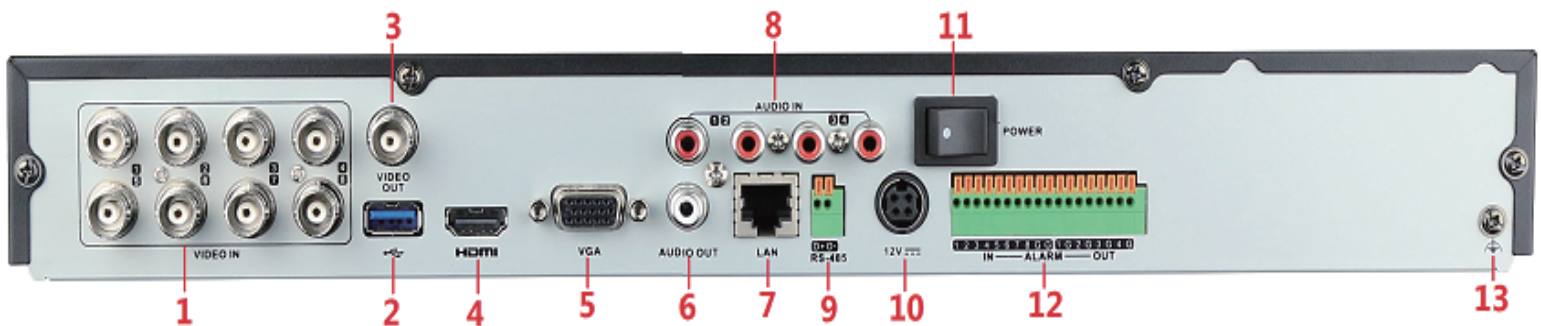

Embedded Hybrid NVR

LTN8708T-HT

VIDEO/ AUDIO INPUT	
Video compression	H.264 Zip+ / H.264
Video input	8ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
Supported HDTV input	3MP, 1080p/25Hz, 1080p/30Hz, 720p/60Hz, 720p/50Hz, 720p/30Hz, 720p/25Hz
Supported AHD input	720p/30Hz, 720p/25Hz
CVBS input	Support
IP input	8-ch(up to 16-ch)
Audio compression	G.711u
Audio input	4-ch, RCA (2.0 Vp-p, 1 kΩ)
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)
VIDEO/ AUDIO OUTPUT	
HDMI output	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60Hz, 1024 × 768/60 Hz
VGA output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60Hz, 1024 × 768/60 Hz
Encoding resolution	3MP@15fps, 1080p/720p/WD1/4CIF/VGA/CIF
CVBS output	1-ch, BNC (1.0 Vp-p, 75Ω), resolution: PAL: 704×576, NTSC: 704×480
Frame rate	Main stream: 30fps(N)/25fps(P) Sub-stream:WD1/4CIF@12fps (non-real-time); CIF/QVGA/QCIF (real time)
Video bit rate	32 Kbps-10Mbps
Audio output	1-ch, RCA (Linear, 1 kΩ)
Audio bit rate	64 Kbps
Dual-stream	Support
Stream type	Video, Video & Audio
Synchronous playback	8ch
NETWORK	
Remote connections	128Mbps
Network protocols	TCP/IP, PPPoE, DHCP, PT Cloud, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF
HARD DISK	
SATA	2 SATA
Capacity	Up to 6TB capacity for each disk
EXTERNAL INTERFACE	
Network interface	1, RJ45 10M / 100M/1000M self-adaptive Ethernet interface
Serial interface	1; RS-485 serial interface, half-duplex
USB port	1 × USB2.0 on the front panel, 1 × USB3.0 on the rear panel
Alarm in/ out	8/4
GENERAL	
Power supply	DC12V
Consumption	≤ 20W
Working temperature	-10 ° C ~ +55 ° C (14° F - 131° F)
Working humidity	10% ~ 90%
Dimensions (WxDxH)	380 × 320 × 48 mm (14.9 × 12.6 × 1.9 inch)
Weight	≤ 2 Kg (4.4lb)