

Platinum Enterprise Level 32 Channel NVR 1.5U LTN8932




Key Features:

- Up to 32 network cameras can be connected
- Support live view, storage, and playback of the connected camera with up to the resolution of 12 megapixels
- HDMI Video output at up to 4K (3840 × 2160) resolution
- Up to 4 SATA hard disks can be connected with up to 6TB capacity for each
- Supports HDD quota and group modes

Rear Panel:

- | | |
|----------------------------|----------------------------|
| 1. LAN Network Interfaces | 7. VGA Interface |
| 2. Audio out | 8. RS-485 Serial Interface |
| 3. Audio in | 9. Alarm in/out |
| 4. HDMI Interface | 10. GND |
| 5. USB 3.0 Interface | 11. 100~240VAC Power Input |
| 6. RS-232 Serial Interface | 12. Power Switch |

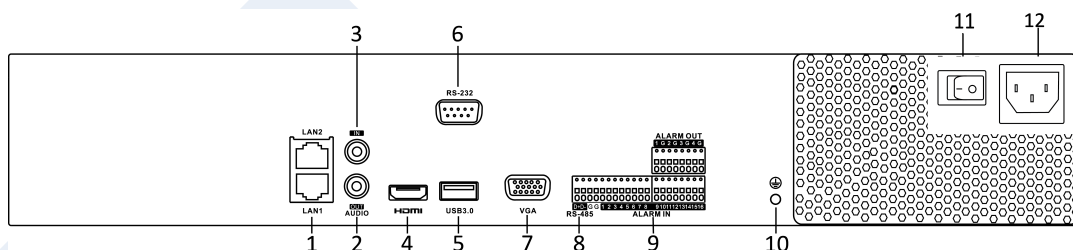

Platinum Enterprise Level 32 Channel NVR 1.5U LTN8932

| Video/Audio Input | |
|---------------------------------|---|
| IP video Input | 32- CH, Up to 12 MP resolution |
| Two-way audio input | 1- ch, RCA (2.0 Vp-p, 1kΩ) |
| Network | |
| Incoming bandwidth | 256Mbps |
| Outgoing bandwidth | 256Mbps |
| Remote connection | 128 |
| Video/Audio Output | |
| Recording resolution | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF |
| HDMI output | 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| VGA output | 1-ch, resolution: 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| Audio output | 1- ch, RCA (Linear, 1kΩ) |
| Decoding | |
| Decoding format | H.265/H.264 Zip+/H.264/MPEG4 |
| Live view / Playback resolution | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF |
| Synchronous playback | 16- CH |
| Capability | 4- ch @ 4K, or 16- ch @ 1080p |
| Hard Disk | |
| SATA | 4 SATA interfaces for 4 HDDs |
| Capacity | Up to 6TB for each disk |
| External Interface | |
| Network Interface | 2 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces |
| Serial interface | 1 RS-485 (half-duplex), 1 RS-232 |
| USB Interface | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 |
| Alarm in/out | 16/4 |
| GENERAL | |
| Power Supply | 100~240V AC |
| Consumption | ≤ 20 W |
| Working Temperature | 14° F - 131° F (-10° C ~ +55° C) |
| Working Humidity | 10% - 90% |
| Casing | 19-inch rack-mounted 1.5U casing |
| Dimensions (WxDxH) | 17.5" × 15.3" × 2.8"(445 × 390 × 70mm) |
| Weight | ≤ 11 lb (5 Kg) |