



Video Solutions for Security Professionals

Q1Q2 2024

Effective January 25, 2024



LTS reserves the right to modify, add or remove sale items. Prices & product specifications may change without prior notice. LTS is not responsible for typographical errors. Images may be used for illustration purpose only and do not represent actual products. Tax not included. All prices effective on January 25, 2024. © 2024 LTS.

Table of Contents

Platinum Series 4

Platinum NVRs	5
Platinum IP Cameras	7
Platinum Specialty IP Cameras	18
Platinum DVRs	21
Platinum HD-TVI Cameras	23

Pro-VS Series 28

Pro-VS NVRs	29
Pro-VS IP Cameras	32
Pro-VS Specialty IP Cameras	34

Limited Collection 36

IP Solutions	37
Residential Solutions	39

Intercom and Access Control 40

Accessories 44

Storage 50

Icon Glossary



NDAA-Compliant



Human / Vehicle Detection



Color Footage 24/7



Hybrid Illumination



MicroSD Supported



True WDR-Enabled



H.265+ Compression



H.265 Compression



Active Deterrence



Panoramic Lens



Two-Way Audio



Built-in Microphone



Auto Focus Lens



Solar-Powered Device



Fisheye Lens



IP and Analog Supported



Wi-Fi



Vandal Proof



RAID Supported



HDMI Output



Fire Prevention



Industrial Temperature Monitoring



Thermal / Optical VCA



Smart Tracking with Human / Vehicle Classification



8K Video Resolution



4K Video Resolution



5 Video Formats Supported



4 Video Formats Supported



About LTS

Founded in 2008, LTS delivers industry-leading security solutions and value-added services in video surveillance with a full line of cameras, intercom, access control products, accessories, mobile apps and software. With offices across the contiguous United States, we provide immediate shipping, same-day pickup, and timely delivery.

End-to-End Support

With our accomplished, industry-driven sales and technical support teams, customers across the country have said that LTS helps achieve what most other companies cannot. We are dedicated to providing end-to-end support on any and every project. Contact a local branch representative today and find out why LTS takes pride in its customer service.

Quality is Key

LTS's product lines feature only high-quality products, and we always aim to provide personalized and professional customer support. With our talented, dedicated product management and sales teams, we make sure that your voice is heard and that your needs are met.

Free IP Consultation

Understanding the complexity of IP networking, we've gone through thousands of R&D tests to make sure we provide the easiest plug-and-play solutions for systems integrators and IP installers. Call us today to get a free IP consultation at any of our nationwide offices.



Download LTS Connect App on



Apple Store



Google Play

Platinum

Best-Selling IP and
Video Surveillance

Professional Level NVR

SKU	LTN8704QN-P4	LTN8708QN-P8	LTN8708D-P8N	LTN8608-P8N	LTN8716D-P16N	LTN8616-P16N
						
						
Featuring						
Video Input	4-Ch IP @ 40 Mbps	8-Ch IP @ 80 Mbps	8-Ch IP @ 80 Mbps	8-Ch IP @ 128 Mbps	16-Ch IP @ 160 Mbps	16-Ch IP @ 256 Mbps
Video Output	HDMI up to 4K (3840 x 2160) / VGA up to 1080p	HDMI up to 4K (3840 x 2160) / VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI up to 8K (7680 x 4320), VGA up to 1080p, CVBS up to 704 x 480	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI up to 8K (7680 x 4320), VGA up to 1080p, CVBS up to 704 x 480
Max. Recording Resolution	Up to 4K, 8 MP (3840 x 2160)	Up to 4K, 8 MP (3840 x 2160)	Up to 12 MP	Up to 32 MP	Up to 12 MP	Up to 32 MP
Decoding Format	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Decoding Capability	1-Ch @ 8 MP / 2-Ch @ 4 MP	1-Ch @ 8 MP / 2-Ch @ 4 MP	VCA by NVR on: 4-Ch @ 4 MP VCA by NVR off: 6-Ch @ 4 MP	8-Ch @ 8 MP	VCA by NVR on: 4-Ch @ 4 MP VCA by NVR off: 6-Ch @ 4 MP	8-Ch @ 8 MP 16-Ch @ 4 MP
Audio Channels (In / Out)	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA
Alarm Channels (In / Out)	-	-	4-Ch / 1-Ch	4-Ch / 1-Ch	4-Ch / 1-Ch	4-Ch / 1-Ch
Built-in PoE	4-Ch	8-Ch	8-Ch	8-Ch	16-Ch	16-Ch
Bandwidth, Connector	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45
Storage	Supports 1 x SATA up to 8 TB, NAS, IP SAN	Supports 2 x SATA up to 8 TB, NAS, IP SAN	Supports 2 x SATA up to 10 TB each, NAS, IP SAN	Supports 2 x SATA up to 14 TB each, NAS, IP SAN	Supports 2 x SATA up to 10 TB each, NAS, IP SAN	Supports 2 x SATA up to 14 TB each, NAS, IP SAN
POSS Supported	-	-	-	4 (TCP)	-	4 (TCP)
Backup	2 x USB 2.0	2 x USB 2.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0
Dimensions (W x D x H)	12.4" x 9.4" x 1.9"	15.2" x 12.4" x 2.0"	15.2" x 12.4" x 2.0"	15.2" x 12.4" x 2.0"	15.2" x 12.4" x 2.0"	15.2" x 12.4" x 2.0"
Product QR Code						

 Western Digital.

Western Digital Device Analytics


Proactive Management of Storage Devices




Learn More

Supported by
LTS NVRs

Professional Level



Enterprise Level



Platinum


Pro-VS

Limited Collection





Intercom + Access Control

Accessories

Enterprise Level NVR

SKU	LTN8916-N	LTN8916-P16N	LTN8932-N	LTN8932-P16N	LTN8964-RN	LTN07128-R16	LTN07128-R16N	LTN07256-R16
								
Featuring								
Video Input	16-Ch IP @ 256 Mbps	16-Ch IP @ 256 Mbps	32-Ch IP @ 320 Mbps	32-Ch IP @ 320 Mbps	64-Ch IP @ 400 Mbps	128-Ch IP @ 576 Mbps	128-Ch IP @ 400 Mbps	256-Ch IP @ 768 Mbps
Video Output	HDMI1 up to 8K (7680 x 4320), HDMI2 up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480	HDMI1 up to 8K (7680 x 4320), HDMI2 up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480	HDMI1 up to 8K (7680 x 4320), HDMI2 up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480	HDMI1 up to 8K (7680 x 4320), HDMI2 up to 4K (3840 x 2160), VGA up to 1080p, CVBS up to 704 x 480	HDMI1 up to 8K (7680 x 4320) / VGA1 up to 1080p, HDMI2 up to 4K (3840 x 2160) / VGA2 up to 1080p, CVBS up to 704 x 480	HDMI1 up to 4K / VGA up to 1080p, HDMI2 up to 4K (4096 x 2160)	HDMI1 up to 8K / VGA up to 1080p, HDMI2 up to 4K (3840 x 2160)	HDMI1 up to 4K / VGA up to 1080p, HDMI2 up to 4K, 6 HDMI TV Wall Built-in 7" Touch Screen
Max. Recording Resolution	Up to 32 MP	Up to 32 MP	Up to 32 MP	Up to 32 MP	Up to 32 MP	Up to 12 MP	Up to 32 MP	Up to 12 MP
Decoding Format	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Decoding Capability	8-Ch @ 8 MP / 16-Ch @ 4 MP	8-Ch @ 8 MP / 16-Ch @ 4 MP	8-Ch @ 8 MP / 16-Ch @ 4 MP	8-Ch @ 8 MP / 16-Ch @ 4 MP	8-Ch @ 8 MP / 16-Ch @ 4 MP	5-Ch @ 8 MP / 10-Ch @ 4 MP	8-Ch @ 8 MP / 16-Ch @ 4 MP	5-Ch @ 8 MP / 10-Ch @ 4 MP
Audio Channels (In / Out)	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 2-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 2-Ch, RCA	1-Ch / 1-Ch, RCA
Alarm Channels (In / Out)	16-Ch / 9-Ch	16-Ch / 9-Ch	16-Ch / 9-Ch	16-Ch / 9-Ch	16-Ch / 9-Ch	48-Ch / 24-Ch	16-Ch / 9-Ch	48-Ch / 24-Ch
Built-in PoE	-	16-Ch	-	16-Ch	-	-	-	-
Bandwidth, Connector	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 2 x RJ45	1000 Mbps, 4 x RJ45, 4 Fiber Optic	10/100/1000 Mbps, 2 x RJ45	1000 Mbps, 4 x RJ45, 4 Fiber Optic
Storage	Supports 4 x SATA up to 14 TB each, eSATA, NAS, IP SAN	Supports 4 x SATA up to 14 TB each, eSATA, NAS, IP SAN	Supports 4 x SATA up to 14 TB each, eSATA, NAS, IP SAN	Supports 4 x SATA up to 14 TB each, eSATA, NAS, IP SAN	Supports 8 x SATA up to 14 TB each, eSATA, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10	Supports 16 x SATA up to 10 TB each, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10	Supports 16 x SATA up to 16 TB each, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10	Supports 16 x SATA up to 10 TB each, NAS, IP SAN, RAID 0 / 1 / 5 / 6 / 10
POSS Supported	8 (TCP or RS232)	8 (TCP or RS232)	8 (TCP or RS232)	8 (TCP or RS232)	8 (TCP or RS232)	16 (TCP)	16 (TCP)	16 (TCP)
Hot Swap HDD	-	-	-	-	Yes	Yes	Yes	Yes
Backup	2 x USB 2.0, 1 x USB 3.0, eSATA	2 x USB 2.0, 1 x USB 3.0, eSATA	2 x USB 2.0, 1 x USB 3.0, eSATA	2 x USB 2.0, 1 x USB 3.0, eSATA	2 x USB 2.0, 2 x USB 3.0, eSATA	2 x USB 2.0, 2 x USB 3.0	2 x USB 2.0, 2 x USB 3.0, eSATA	2 x USB 2.0, 2 x USB 3.0
Dimensions (W x D x H)	17.5" x 15.7" x 3.0"	17.5" x 15.7" x 3.0"	17.5" x 15.7" x 3.0"	17.5" x 15.7" x 3.0"	17.5" x 18.3" x 3.6"	17.5" x 19.4" x 5.7"	17.5" x 19.5" x 5.9"	17.5" x 19.4" x 5.7"
Product QR Code								

Color 24/7 IP Turret Camera

SKU	CMIP3C42WI-28MDA CMIP3C42WI-MDA		CMIP3C42W-28SDL	CMIP3C82WI-28MDA	CMIP3C82W-28MDAL										
															
Featuring	      		       	         	         										
Max. Resolution	4 MP, Hybrid Illumination Color 24/7 IP Camera 2688 x 1520 @ 30 fps		4 MP, Color 24/7 IP Camera 2688 x 1520 @ 30 fps	8 MP, Hybrid Illumination Color 24/7 IP Camera 3840 x 2160 @ 24 fps	8 MP, Color 24/7 IP Camera 3840 x 2160 @ 24 fps										
Lens	2.8 / 4 mm, Fixed		2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed										
Min. Illumination	0.0005 Lux @ F1.0, AGC On, 0 Lux with Light on		0.0005 Lux @ F1.0, 0 Lux with LED Light on	0.0008 Lux @ F1.0, AGC On, 0 Lux with Light on	0.0005 Lux @ F1.0, AGC On, 0 Lux with White Light										
Compression	H.265+ / H.265		H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265	H.265+ / H.265										
Image Sensor	1/3" Progressive Scan CMOS		1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.2" Progressive Scan CMOS										
Special Features	IR + White Light, MD 2.0, True WDR 120 dB		MD 2.0, True WDR 130 dB, Active Deterrence with Strobe Light	IR + White Light, MD 2.0, True WDR 130 dB	MD 2.0, True WDR 130 dB, Active Deterrence with Strobe Light										
Audio In / Out	Built-in Mic		Built-in Mic & Speaker	Built-in Mic	Built-in Mic & Speaker, 1-Ch / 1-Ch										
Alarm In / Out	-		1-Ch / 1-Ch	-	1-Ch / 1-Ch										
MicroSD Storage	Up to 512 GB		Up to 256 GB	Up to 512 GB	Up to 512 GB										
Protection	IP67		IP67	IP67	IP67										
Power	12V DC, PoE		12V DC, PoE	12V DC, PoE	12V DC, PoE										
Product QR Code	 														
Compatible Accessories	Compatible with CMIP3C42WI						Compatible with CMIP3C42W-28SDL				Compatible with CMIP3C82WI / CMIP3C82W-28MDAL				
															




Panoramic IP Camera			Color 24/7 IP Dome Camera			
SKU	CMIP3C6PW-28SDL	CMIP3C8PW-SDL	CMIP7C42WI-28MDA	CMIP7C82W-28MDA	CMIP7C82WI-28MDA	CMIP7C43W-SDZ
						
Featuring	         	         	         	         	         	         
Max. Resolution	6 MP, Color 24/7 IP Camera 3632 x 1632 @ 20 fps	8 MP, Color 24/7 IP Camera 5120 x 1440 @ 20 fps or 15 fps with WDR	4 MP, Hybrid Illumination Color 24/7 IP Camera 2688 x 1520 @ 30 fps	8 MP, Color 24/7 IP Camera 3840 x 2160 @ 24 fps	8 MP, Hybrid Illumination Color 24/7 IP Camera 3840 x 2160 @ 24 fps	4 MP, Color 24/7 IP Camera 2688 x 1520 @ 30 fps
Lens	180° Horizontal, 81° Vertical	180° Horizontal, 44° Vertical	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 - 12 mm, VF, Motorized
Min. Illumination	0.0005 Lux @ F1.0, 0 Lux with LED Light on	0.0005 Lux @ F1.0, 0 Lux with LED Light on	0.0005 Lux @ F1.0, AGC On, 0 Lux with Light on	0.0008 Lux @ F1.0, AGC On, 0 Lux with White Light	0.0005 Lux @ F1.0, AGC On, 0 Lux with Light on	0.0005 Lux @ F1.0, AGC On, 0 Lux with White Light
Compression	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265	H.265+ / H.265	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265
Image Sensor	2 x 1/2.5" Progressive Scan CMOS	2 x 1/1.8" Progressive Scan CMOS	1/3" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS
Special Features	MD 2.0, True WDR 130 dB, Active Deterrence with Strobe Light	MD 2.0, True WDR 130 dB, Active Deterrence with Strobe Light	IR + White Light, MD 2.0, True WDR 120 dB	MD 2.0, True WDR 130 dB	IR + White Light, MD 2.0, True WDR 130 dB	MD 2.0, True WDR 130 dB
Audio In / Out	Built-in Mic & Speaker	Built-in Mic & Speaker	Built-in Mic	Built-in Mic	Built-in Mic	1-Ch / 1-Ch
Alarm In / Out	1-Ch / 1-Ch	1-Ch / 1-Ch	-	-	1-Ch / 1-Ch	1-Ch / 1-Ch
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB	Up to 512 GB
Protection	IP67	IP67	IP67, IK10	IP67, IK10	IP67	IP67, IK10
Power	12V DC, PoE Max 12.5W	12V DC, PoE Max 10.5W	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE
Product QR Code						
Compatible Accessories	Compatible with CMIP3C6PW		Compatible with CMIP3C8PW		Compatible with CMIP7C42WI / CMIP7C82W / CMIP7C82WI	
						
	LTB701 Junction Box	LTB342-140 Wall Mount	LTB341 Pendant Mount	LTB342-155 Wall Mount	LTB781 Pendant Mount	LTB722 Junction Box
Compatible Accessories						
						
	LTB342-155 Wall Mount	LTB342-JBOX Junction Box for Wall Mount	LTB781 Pendant Mount	LTB388 Pole Mount	LTB389 Corner Mount	

Color 24/7 IP Bullet Camera				Solar IP Camera	
SKU	CMIP8C42WI-28MDA	CMIP9C42WI-28MD		CMIP9C82W-28SD-B4G	
					
Featuring	      	     		       	
Max. Resolution	4 MP, Hybrid Illumination Color 24/7 IP Camera 2688 x 1520 @ 30 fps	4 MP, Hybrid Illumination Color 24/7 IP Camera 2688 x 1520 @ 30 fps		8 MP, Color 24/7 IP Camera 3840 x 2160 @ 15 fps	
Lens	2.8 mm, Fixed	2.8 mm, Fixed		2.8 mm, Fixed	
Min. Illumination	0.0005 Lux @ F1.0, AGC On, 0 Lux with Light on	0.0005 Lux @ F1.0, AGC On, 0 Lux with Light on		0.0005 Lux @ F1.0, 0 Lux with LED Light on	
Compression	H.265+ / H.265	H.265+ / H.265		H.265 / MJPEG	
Image Sensor	1/3" Progressive Scan CMOS	1/3" Progressive Scan CMOS		1/1.2" Progressive Scan CMOS	
Special Features	IR + White Light, MD 2.0, True WDR 120 dB	IR + White Light, MD 2.0, True WDR 120 dB		MD 2.0, T-Mobile Network, True WDR 130 dB	
Audio In / Out	Built-in Mic	-		1-Ch / 1-Ch	
Alarm In / Out	-	-		1-Ch / 1-Ch	
Storage	MicroSD up to 512 GB	MicroSD up to 512 GB		Built-in 64 GB, MicroSD up to 256 GB	
Protection	IP67	IP67		IP67	
Power	12V DC, PoE	12V DC, PoE		12V DC, 1A, 80W Solar Panel, 360Wh Battery Included	
Product QR Code					
Compatible Accessories	Compatible with CMIP8C42WI-28MDA		Compatible with CMIP9C42WI-28MD		Compatible with CMIP9C82W-28SD-B4G
	 LTB345 Junction Box	 LTB801 Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTWB-5AC-12 12V DC Wireless Bridge (Up to 3 Miles)


Turret IP Camera

SKU	CMIP3342W-28MDA CMIP3342WB-28MDA CMIP3342W-MDA	CMIP3382W-28MDA CMIP3382WB-28MDA CMIP3382W-MDA	CMIP3283W-SDZ	CMIP3D82W-28SDA-SL								
			 Junction Box Included									
Featuring	    	     	      	      								
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	8 MP, 3840 x 2160 @ 20 fps	8 MP, 3840 x 2160 @ 20 fps	8 MP, 3840 x 2160 @ 24 fps								
Lens	2.8 / 4 mm, Fixed	2.8 / 4 mm, Fixed	2.8 - 12 mm, VF, Motorized	2.8 mm, Fixed								
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.003 Lux @ F1.6								
Smart Focus	-	-	Yes	-								
Compression	H.265+ / H.265	H.265+ / H.265	H.265+ / H.265	H.265+ / H.265 / H.264+ / H.264								
Supplemental Lighting	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR LED up to 130 ft	Matrix IR LED up to 100 ft								
Special Features	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB, Active Deterrence with Strobe Light								
Audio In / Out	Built-in Mic	Built-in Mic	1-Ch / 1-Ch	Built-in Mic & Speaker, 1-Ch / 1-Ch								
Alarm In / Out	-	-	1-Ch / 1-Ch	1-Ch / 1-Ch								
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 256 GB	Up to 512 GB								
Protection	IP67	IP67	IP67, IK10	IP67								
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE								
Product QR Code	 2.8 mm Lens, White  2.8 mm Lens, Black  4 mm Lens	 2.8 mm Lens, White  2.8 mm Lens, Black  4 mm Lens										
Compatible Accessories	Compatible with Designated Cameras Above						For All Cameras Above		Compatible with CMIP3283W-SDZ and CMIP3D82W-28SDA-SL			
	 LTB03-W Junction Box (White) for CMIP33XX	 LTB03-B Junction Box (Black) for CMIP33XX	 LTB301 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB331 Pendant Mount for CMIP33XX	 LTB341 Pendant Mount 22" (56cm)	 LTB371 Pendant Mount 21.5" (55cm)	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB701 Junction Box	 LTB342-140 Wall Mount	 LTB341 Pendant Mount 22" (56cm)

Mini Dome Fixed Lens IP Camera

SKU	CMIP3142W-28SDA	CMIP3142W-28SDA-WIFI	CMIP3162W-28SDA			
						
Featuring	      	       	      			
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	4 MP, 2688 x 1520 @ 30 fps	6 MP, 3200 x 1800 @ 20 fps			
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed			
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.6			
Compression	H.265+ / H.265	H.265+ / H.265	H.265+ / H.265			
Supplemental Lighting	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft			
Special Features	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB			
Audio In / Out	Built-in Mic & Audio Out	Built-in Mic & Audio Out	Built-in Mic & Audio Out			
Alarm In / Out	1-Ch / 1-Ch	1-Ch / 1-Ch	1-Ch / 1-Ch			
Built-in Wi-Fi	-	2.4 GHz, 802.11g/n	-			
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 256 GB			
Range of Motion	3-Axis	3-Axis	3-Axis			
Protection	IP67, IK8	IP67, IK8	IP67, IK8			
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE			
Product QR Code						
Compatible Accessories	Compatible with Cameras Above					
	 LTB347H Junction Box	 LTB742-120 Wall Mount	 LTB742-120B Wall Mount with Junction Box	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount


Dome Fixed Lens IP Camera

SKU	CMIP7342W-28MDA CMIP7342WB-28MDA CMIP7342W-MDA	CMIP7382W-28MDA CMIP7382WB-28MDA CMIP7382W-MDA	CMIP7382W-28SH				
							
Featuring	     	      	     				
Max. Resolution	4 MP, 2688 × 1520 @ 30 fps	8 MP, 3840 × 2160 @ 20 fps	8 MP, 3840 × 2160 @ 20 fps				
Lens	2.8 / 4 mm, Fixed	2.8 / 4 mm, Fixed	2.8 mm, Fixed				
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.028 Lux @ F2.0				
Compression	H.265+ / H.265	H.265+ / H.265	H.265+ / H.265				
Supplemental Lighting	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft				
Special Features	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	True WDR 120 dB, 1080p HDMI Video Output				
Audio In / Out	Built-in Mic	Built-in Mic	-				
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 128 GB				
Range of Motion	3-Axis	3-Axis	3-Axis				
Protection	IP67, IK10	IP67, IK10	IK10				
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE				
Product QR Code	 2.8 mm Lens, White	 2.8 mm Lens, Black	 4 mm Lens				
		 2.8 mm Lens, White	 2.8 mm Lens, Black				
			 4 mm Lens				
							
Compatible Accessories	Compatible with Cameras Above						
	 LTB347H Junction Box (White)	 LTB347HB Junction Box (Black)	 LTB742-120 Wall Mount	 LTB742-120B Wall Mount with Junction Box	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount

Dome Vari-focal Lens IP Camera

SKU	CMIP7243W-SDZ	CMIP7283W-SDZ		
	 Junction Box Included	 Junction Box Included		
Featuring				
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	8 MP, 3840 × 2160 @ 20 fps		
Lens	2.8 - 12 mm, VF, Motorized	2.8 - 12 mm, VF, Motorized		
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6		
Compression	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264		
Supplemental Lighting	Matrix IR LED up to 130 ft	Matrix IR LED up to 130 ft		
Smart Focus	Yes	Yes		
Special Features	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB		
Audio In / Out	1-Ch / 1-Ch	1-Ch / 1-Ch		
Alarm In / Out	1-Ch / 1-Ch	1-Ch / 1-Ch		
MicroSD Storage	Up to 256 GB	Up to 256 GB		
Range of Motion	3-Axis	3-Axis		
Protection	IP67, IK10	IP67, IK10		
Power	12V DC, PoE	12V DC, PoE		
Product QR Code				
Compatible Accessories	Compatible with Cameras Above			
	 LTB342-155 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB388 Pole Mount	 LTB389 Corner Mount

Mini Bullet Fixed Lens IP Camera

SKU	CMIP8342W-28MDA CMIP8342W-MDA	CMIP8362W-28MDA	CMIP8382W-28MDA
			
Featuring	   	   	   
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	6 MP, 3200 x 1800 @ 20 fps	8 MP, 3840 x 2160 @ 20 fps
Lens	2.8 / 4 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.6
Compression	H.265+ / H.265	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Supplemental Lighting	Matrix IR LED up to 130 ft	Matrix IR LED up to 130 ft	Matrix IR LED up to 130 ft
Special Features	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB
Audio In / Out	Built-in Mic	Built-in Mic	Built-in Mic
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 256 GB
Protection	IP67	IP67	IP67
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE
Product QR Code	 2.8 mm Lens  4 mm Lens		
Compatible Accessories	Compatible with Cameras Above		
	 LTB345 Junction Box (White)		

Bullet Fixed Lens IP Camera

SKU	CMIP9342W-28MD CMIP9342W-MD	CMIP9362W-28MD	CMIP9382W-28MD CMIP9382W-MD
	 Junction Box Included	 Junction Box Included	 Junction Box Included
Featuring	   	   	    
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	6 MP, 3200 x 1800 @ 20 fps	8 MP, 3840 x 2160 @ 20 fps
Lens	2.8 / 4 mm, Fixed	2.8 mm Fixed	2.8 / 4 mm, Fixed
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.6
Compression	H.265+ / H.265	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265
Supplemental Lighting	Matrix IR LED up to 200 ft	Matrix IR LED up to 200 ft	Matrix IR LED up to 200 ft
Special Features	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 256 GB
Protection	IP67	IP67	IP67
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE
Product QR Code	 2.8 mm Lens  4 mm Lens	 2.8 mm Lens	 2.8 mm Lens  4 mm Lens
Compatible Accessories	Compatible with Cameras Above		
	 LTB801 Junction Box	 LTB378 Pole Mount	 LTB379 Corner Mount

Bullet Vari-focal Lens IP Camera

SKU	CMIP9743W-SDZ	CMIP9763W-SDZ	CMIP9783W-SDZ	CMIP9243W-SZ		
	 Junction Box Included	 Junction Box Included	 Junction Box Included	 Junction Box Included		
Featuring						
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	6 MP, 3200 x 1800 @ 20 fps	8 MP, 3840 x 2160 @ 20 fps	4 MP, 2560 x 1440 @ 60 fps		
Lens	2.8 - 12 mm, VF, Motorized	2.8 - 12 mm, VF, Motorized	2.8 - 12 mm, VF, Motorized	4.7 - 118 mm, Auto Focus VF		
Min. Illumination	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.005 Lux @ F1.6	0.007 Lux @ F1.2		
Compression	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265		
Supplemental Lighting	Matrix IR LED up to 200 ft	Matrix IR LED up to 200 ft	Matrix IR LED up to 200 ft	IR up to 656 ft		
Special Features	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 120 dB	MD 2.0, True WDR 140 dB		
Audio In / Out	1-Ch / 1-Ch	1-Ch / 1-Ch	1-Ch / 1-Ch	1-Ch / 1-Ch		
Alarm In / Out	1-Ch / 1-Ch	1-Ch / 1-Ch	1-Ch / 1-Ch	2-Ch / 2-Ch		
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 256 GB	Up to 128 GB		
Protection	IP67	IP67	IP67	IP67		
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE		
Product QR Code						
Compatible Accessories	Compatible with CMIP9743W-SDZ / CMIP9763W-SDZ / CMIP9783W-SDZ		Compatible with CMIP9763W		Compatible with CMIP9243W-SZ	
	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB801 Junction Box	 LTB801-A Junction Box	 LTB388 Pole Mount	 LTB389 Corner Mount

Turret IP Camera				
SKU	CMIP1042W-28MA	CMIP1043NW-MZ		
				
Featuring	   	  		
Max. Resolution	4 MP, 2560 x 1440 @ 20 fps	4 MP, 2560 x 1440 @ 20 fps		
Lens	2.8 mm, Fixed	2.8 - 12 mm, VF, Motorized		
Min. Illumination	0.01 Lux @ F2.0	0.005 Lux @ F1.6		
Smart Focus	-	Yes		
Compression	H.265+ / H.265	H.265+ / H.265		
Supplemental Lighting	Matrix IR LED up to 100 ft	Matrix IR LED up to 100 ft		
Special Features	True WDR 120 dB	True WDR 120 dB		
Audio In / Out	Built-in Mic	-		
MicroSD Storage	Up to 256 GB	Up to 256 GB		
Protection	IP67	IP67		
Power	12V DC, PoE	12V DC, PoE		
Product QR Code				
Compatible Accessories	Compatible with Cameras Above			
	 LTB03-W Junction Box	 LTB307 Junction Box	 LTB301 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount
	 LTB371 Pendant Mount 21.5" (55cm)	 LTB331 Pendant Mount 21.5" (55cm)	 LTB378 Pole Mount	 LTB379 Corner Mount

Turret Fixed Lens IP Camera				
SKU	CMIP1342WE-28MDA	CMIP1382NW-28MA	CMIP1382WE-28MDA	
				
Featuring				
Max. Resolution	4 MP, 2560 x 1440 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps	8 MP, 3840 x 2160 @ 15 fps	
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	
Min. Illumination	0.005 Lux @ F1.6	0.01 Lux @ F2.0	0.01 Lux @ F2.0	
Compression	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265	H.265+ / H.265 / H.264+ / H.264	
Supplemental Lighting	Matrix IR and White Light up to 100 ft	Matrix IR LED up to 100 ft	Matrix IR and White Light up to 100 ft	
Special Features	MD 2.0, True WDR 120 dB	True WDR 120 dB	MD 2.0, True WDR 120 dB	
Audio In / Out	Built-in Mic	Built-in Mic	Built-in Mic	
MicroSD Storage	Up to 512 GB	Up to 256 GB	Up to 512 GB	
Protection	IP67	IP67	IP67	
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	
Product QR Code				
Compatible Accessories	Compatible with Cameras Above			
	 LTB03-W Junction Box (White)	 LTB03-B Junction Box (Black)	 LTB307 Junction Box (White)	 LTB307B Junction Box (Black)  LTB301 Wall Mount
	 LTB342-JBOX Junction Box for Wall Mount	 LTB331 Pendant Mount for CMIP1382NW	 LTB371 Pendant Mount 21.5" (55cm)	 LTB378 Pole Mount  LTB379 Corner Mount

Dome IP Camera

SKU	CMIP7042W-28MA	CMIP7043NW-MZ				
						
Featuring	    	   				
Max. Resolution	4 MP, 2560 x 1440 @ 20 fps	4 MP, 2560 x 1440 @ 20 fps				
Lens	2.8 mm, Fixed	2.8 - 12 mm, VF, Motorized				
Min. Illumination	0.01 Lux @ F2.0	0.005 Lux @ F1.6				
Compression	H.265+ / H.265	H.265+ / H.265				
Supplemental Lighting	IR LED up to 100 ft	Matrix IR LED up to 100 ft				
Smart Focus	-	Yes				
Special Features	True WDR 120 dB	True WDR 120 dB				
Audio In / Out	Built-in Mic	-				
MicroSD Storage	Up to 256 GB	Up to 256 GB				
Range of Motion	2-Axis	3-Axis				
Protection	IP67, IK10	IP67, IK10				
Power	12V DC, PoE	12V DC, PoE				
Product QR Code						
Compatible Accessories	Compatible with CMIP7042W-28MA		Compatible with CMIP7043NW-MZ			
	 LTB347H Junction Box	 LTB742-120 Wall Mount	 LTB742-120B Wall Mount with Junction Box	 LTB701 Junction Box	 LTB342-135B Wall Mount with Junction Box	 LTB381 Pendant Mount 22\" (56cm)
	 LTB731 Pendant Mount	 LTB378 Pole Mount	 LTB379 Corner Mount	 LTB378 Pole Mount		 LTB379 Corner Mount

Bullet IP Camera

SKU	CMIP8042W-28MA	CMIP8043NW-MZ		
				
Featuring	   	  		
Max. Resolution	4 MP, 2560 × 1440 @ 20 fps	4 MP, 2560 × 1440 @ 20 fps		
Lens	2.8 mm, Fixed	2.8 - 12 mm, VF, Motorized		
Min. Illumination	0.01 Lux @ F2.0	0.005 Lux @ F1.6		
Smart Focus	-	Yes		
Compression	H.265+ / H.265	H.265+ / H.265		
Supplemental Lighting	Matrix IR LED up to 100 ft	Matrix IR LED up to 165 ft		
Special Features	True WDR 120 dB	True WDR 120 dB		
Audio In / Out	Built-in Mic	-		
MicroSD Storage	Up to 256 GB	Up to 256 GB (Snapshot only)		
Protection	IP67	IP67		
Power	12V DC, PoE	12V DC, PoE		
Product QR Code				
Compatible Accessories	Compatible with CMIP8042W-28MA		Compatible with CMIP8043NW-MZ	
				
	LTB345 Junction Box	LTB801 Junction Box	LTB378 Pole Mount	LTB379 Corner Mount

Wi-Fi Doorbell	
SKU	NDB322-W
	 

Featuring	     
Max. Resolution	2 MP, 1536 x 1536 @ 15 fps
Lens	2.1 mm, Fixed
Min. Illumination	0.5 Lux
Compression	H.265 / H.264
Supplemental Lighting	IR LED up to 20 ft
Special Features	170° Vertical View, MD 2.0
Audio In / Out	Built-in Mic and Speaker
Built-in Wi-Fi	2.4 / 5 GHz, 802.11a/b/g/n
MicroSD Storage	Up to 256 GB
Range of Motion	Angled Mounting Plates Included
Power	24V AC

Indoor Wi-Fi IP Camera	
SKU	CMIP8942W-28SDA-WIFI
	 

Featuring	     
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps
Lens	2.8 mm, Fixed
Min. Illumination	0.005 Lux @ F1.6
Compression	H.265+ / H.265 / H.264+ / H.264
Supplemental Lighting	Matrix IR LED up to 33 ft
Special Features	MD 2.0, True WDR 120 dB
Audio In / Out	Built-in Mic and Speaker
Built-in Wi-Fi	2.4 Ghz, 802.11b/g/n
MicroSD Storage	Up to 256 GB
Range of Motion	3-Axis
Power	12V DC, PoE

Thermal IP Camera		
SKU	CMIP3T22W1-2M	CMIP9T221-3M
		 Junction Box Included

Featuring	     	     
Resolution, Sensor	160 x 120 @ 25 fps Thermal Image Sensor	160 x 120 @ 25 fps Thermal Image Sensor
Thermal Lens	1.8 mm, Fixed	3.1 mm, Fixed
Optical Resolution	1920 x 1080 @ 30 fps	1920 x 1080 @ 30 fps
Optical Lens	2.1 mm Fixed	4 mm Fixed
MicroSD Storage	Up to 256 GB	Up to 128 GB
WDR	True WDR 120 dB	True WDR 120 dB
Protection	IP67	IP67
Product QR Code		

Compatible with Cameras Above			
Compatible Accessories	 LTB701 Junction Box for CMIP3T22W1-2M	 LTB342-140 Wall Mount for CMIP3T22W1-2M	 LTB342-JBOX Junction Box for Wall Mount
	 LTB341 Pendant Mount 22" (56cm) for CMIP3T22W1-2M	 LTB378 Vertical Pole Mount	 LTB379 Corner Mount

Palm-size PTZ IP Camera	
SKU	PTZIP204W-X4IR
	

Featuring	    
Max. Resolution	4 MP, 2560 x 1440 @ 30 fps
Image Sensor	1/3" CMOS
Compression	H.265+ / H.265 / H.264+ / H.264
Min. Illumination	0.005 Lux @ F1.6
Lens and Zoom	2.8 - 12 mm, 4x Optical Zoom
Supplemental Lighting	IR LEDs up to 66 ft, Auto Intensity Adjustment
Range of Motion	Pan 0° - 330°, Tilt 0° - 90°
Special Features	True WDR 120 dB, HLC, EIS
Storage	MicroSD up to 256 GB, ANR
Audio In / Out	1-Ch / 1-Ch
Protection	IK10, IP66, Lightning / Surge Protection
Power	12V DC, PoE (802.3 af) Max 12W
Dimensions	Φ 2.5" Outdoor / Indoor

Product QR Code		
Accessories	PoE Injector and Wall Mount (LTB202) Sold Separately	
Compatible Accessories	 LTB347H Junction Box (White)	 LTB202 Wall Mount
	 LTB773 Pendant Mount 7.8" (20cm)	 LTB774 Pendant Mount 78" (200cm)

Multi-lens IP Camera

SKU	CMIP7553W4-SZ8
	

Featuring	    
Max. Resolution	20 MP Multi-Lens (4 x 5 MP), 2560 x 1920 @ 25 fps
Lens	2.8 - 8 mm, Auto Focus Motorized, 4 Flexible Lenses
Compression	Advanced Compression H.265+ / H.265
Special Features	True WDR 120 dB, IR up to 100 ft, HLC, Defog, EIS
Storage	MicroSD up to 128 GB, Auto Network Replenishment
Audio In / Out	1-Ch / 1-Ch
Alarm In / Out	2-Ch / 2-Ch
Protection	IP67, IK10
Power	12V DC / 24V AC, 22W; PoE+ (802.3at), 19W Class4
Product QR Code	

Compatible Accessories			
			

Fisheye IP Camera

SKU	CMIP7562NF-SE
	

Featuring	     
Max. Resolution	6 MP, 3072 x 2048 @ 30 fps
Lens	1.27 mm, Fixed
View	360° Fisheye and 180° Panoramic View
Mode	Multiple Viewing Modes and Virtual PTZ
Compression	H.265+ / H.265
Supplemental Lighting	Low-light, IR up to 50 ft
MicroSD Storage	Up to 256 GB
Special Features	DWDR
Audio In / Out	Built-in Mic & Speaker, 1-Ch / 1-Ch
Protection	IP67, IK10
Power	12V DC, PoE

Product QR Code			
Compatible Accessories	 LTB756 Wall Mount	 LTB342-JBOX Junction Box for Wall Mount	 LTB759 Ceiling Mount 22\" (56cm)
	 LTB755 Inclined Ceiling/ Wall Mount	 LTB378 Pole Mount	 LTB379 Corner Mount

License Plate IP Camera

SKU	CMIP7923LPR-22	CMIP7943WLPR-32R
		 Junction Box Included

Featuring	    	   
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	4 MP, 2688 x 1520 @ 30 fps
Lens	6 - 22 mm, Auto Focus VF, Motorized	8 - 32 mm, Auto Focus VF, Motorized
Min. Illumination	0.005 Lux @ F1.2, 0 Lux with White Light	0.0005 Lux @ F1.2, 0 Lux with IR
Supplemental Lighting	4 White Lights for Night Vision	Matrix IR up to 330 ft
Special Features	True WDR 120 dB, HLC	True WDR 140 dB
License Plate Recognition	No License Plate Detection	Capture Rate > 98%, Recognition Rate > 96%, Searchable from IP Camera & NVR
MicroSD Storage	Up to 128 GB	Up to 256 GB
Audio In / Out	1-Ch / 1-Ch, Terminal Block	1-Ch / 1-Ch
Alarm In / Out	1-Ch / 1-Ch, Terminal Block	2-Ch / 2-Ch
Protection	IP67, IK10	IP67, IK10


Product QR Code					
Compatible Accessories	Compatible with CMIP7923LPR-22		Compatible with CMIP7943WLPR-32R		
					
	LTB801 Junction Box	LTB378 Pole Mount	LTB379 Corner Mount	LTB388 Pole Mount	LTB389 Corner Mount

PTZ IP Camera

SKU	PTZIP424W-X25IR		PTZIP4C44W-X25IR		PTZIP514NW-X25IR		PTZIP772NW-X32IR		PTZIP778NW-X25IR	
										
Featuring										
Max. Resolution	4 MP, 2560 x 1440 @ 30 fps		Fixed & PTZ Lens: 4 MP, 2688 x 1520 @ 30 fps		4 MP, 2560 x 1440 @ 30 fps		2.1 MP, 1920 x 1080 @ 30 fps		8 MP, 3840 x 2160 @ 24 fps	
Image Sensor	1/2.8" CMOS		Fixed: 1/3" CMOS; PTZ: 1/2.8" CMOS		1/2.8" CMOS		1/2.8" CMOS		1/1.8" CMOS	
Lens and Zoom	4.8 - 120 mm, 25x Optical Zoom, Auto Focus		Fixed: 2.8 mm; PTZ: 4.8 - 120 mm, 25x Optical Zoom, Auto Focus		4.8 - 120 mm, 25x Optical Zoom, Auto Focus		4.8 - 153 mm, 32x Optical Zoom, Auto Focus		5.9 - 147.5 mm, 25x Optical Zoom, Auto Focus	
Min. Illumination	0.005 Lux @ F1.6		Fixed: 0.0005 Lux @ F1.0; PTZ: 0.005 Lux @ F1.6, AGC ON		0.005 Lux @ F1.6		0.005 Lux @ F1.6		0.005 Lux @ F1.5	
Compression	H.265+ / H.265 / H.264+ / H.264		H.265+ / H.265 / H.264+ / H.264		H.265+ / H.265 / H.264+ / H.264		H.265+ / H.265 / H.264+ / H.264		H.265+ / H.265 / H.264+ / H.264	
Supplemental Lighting	IR LEDs up to 165 ft, Auto Intensity Adjustment		Fixed: White LED up to 100 ft; PTZ: IR LED up to 328 ft		IR LEDs up to 492 ft, Auto Intensity Adjustment		IR LEDs up to 656 ft, Auto Intensity Adjustment		IR LEDs up to 656 ft, Auto Intensity Adjustment	
Storage	MicroSD Slot to 256 GB, Auto Network Replenishment		MicroSD up to 256 GB, Auto Network Replenishment		MicroSD up to 256 GB, Auto Network Replenishment		MicroSD up to 256 GB, Auto Network Replenishment		MicroSD up to 256 GB, Auto Network Replenishment	
Range of Motion	Pan 0° - 360°, Tilt -5° - 90°		Pan 0° - 360°, Tilt -15° - 90° (Auto-flip)		-15° - 90° (Auto-flip)		-15° - 90° (Auto-flip)		-15° - 90° (Auto-flip)	
Image Enhancement	True WDR 120 dB, HLC, Defog, EIS		True WDR 120 dB, HLC, Defog, EIS		True WDR 120 dB, HLC, Defog, EIS		True WDR 120 dB, HLC, Defog, EIS		True WDR 120 dB, HLC, Defog, EIS	
Audio In / Out, Alarm In / Out	Audio 1-Ch / 1-Ch, Alarm 2-Ch / 2-Ch		Audio 1-Ch / 1-Ch, Alarm 1-Ch / 1-Ch		Audio 1-Ch / 1-Ch, Alarm 2-Ch / 1-Ch		Audio 1-Ch / 1-Ch, Alarm 2-Ch / 1-Ch		Audio 1-Ch / 1-Ch, Alarm 2-Ch / 1-Ch	
Outdoor Protection	IK10 , IP66, Lightning / Surge Protection		IP66, Lightning / Surge Protection		IP66, Lightning / Surge Protection		IP66, Lightning / Surge Protection		IK10 , IP66, Lightning / Surge Protection	
Power	12V DC, PoE+ (802.3at, class4), Max 18W		12V DC, PoE+ (802.3at, class4), Max 24W		24V AC, PoE+ (802.3at), Max 24W		24V AC, High PoE Max 40W		24V AC, High PoE Max 40W	
Dimensions	Φ 4"		Φ 4"		Φ 5"		Φ 7"		Φ 7"	
Product QR Code										
Accessories	Wall Mount Bracket (LTB412) Included, PoE+ (30W) Sold Separately		Wall Mount Bracket (LTB212) Included, PoE+ (30W) Sold Separately		Wall Mount Bracket (LTB762) Included, PoE+ (30W) Sold Separately		Wall Mount Bracket (LTB762) Included, High PoE Injector (60W) Sold Separately		Wall Mount Bracket (LTB762) Included, High PoE Injector (60W) Sold Separately	
Compatible Accessories	Compatible with Designated Cameras Above									
	 LTB412 Wall Mount for PTZIP424W	 LTB342-JBOX Junction Box for Wall Mount LTB412	 LTB751-20 Pendant Mount 20" (20cm) for PTZIP4C44W / 514NW / 772NW	 LTB751 Pendant Mount 20" (50cm) for PTZIP4C44W / 514NW / 772NW	 LTB742 Parapet Wall Mount for PTZIP4C44W / 514NW / 772NW / 778NW	 LTB762 Wall Mount for PTZIP514NW / 772NW / 778NW	 LTB378 Pole Mount for All Cameras Above	 LTB379 Corner Mount for PTZIP424W	 LTB397 Corner Mount for PTZIP4C44W / 514NW / 772NW / 778NW	 POE-PTZPI60N High PoE+ (60W) for All Cameras Above

Advanced Level DVR				Professional Level DVR		
SKU	LTD8304M-ET	LTD8308M-ETC	LTD8316M-ET	LTD8504M-ST	LTD8508M-ST	LTD8516M-STN
						
Featuring						
Analog Video Input	4-Ch (TVI / AHD / CVI / 960H), up to 4 MP	8-Ch (TVI / AHD / CVI / 960H), up to 4 MP	16-Ch (TVI / AHD / CVI / 960H), up to 4 MP	4-Ch (HD-TVI / AHD / CVI / 960H), up to 8 MP	8-Ch (HD-TVI / AHD / CVI / 960H), up to 8 MP	16-Ch (HD-TVI / AHD / CVI / 960H), up to 8 MP
Analog Record Rate	4 MP Lite @ 15 fps, 1080p @ 15 fps	4 MP Lite @ 15 fps, 1080p @ 15 fps	4 MP Lite @ 15 fps, 1080p @ 15 fps	1st CH up to 8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps	8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps	8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps
IPC Input	1-Ch (up to 5-Ch), up to 6 MP	2-Ch (up to 10-Ch), up to 6 MP	2-Ch (up to 18-Ch), up to 6 MP	2-Ch (up to 6-Ch), up to 8 MP	4-Ch (up to 12-Ch), up to 8 MP	8-Ch (up to 24-Ch), up to 8 MP
	Enhanced IP Mode On: 2-Ch (up to 6-Ch), up to 4 MP, up to 4 Mbps per CH	Enhanced IP Mode On: 4-Ch (up to 12-Ch), up to 4 MP, up to 4 Mbps per CH	Enhanced IP Mode On: 8-Ch (up to 24-Ch), up to 4 MP, up to 4 Mbps per CH	Enhanced IP Mode On: 4-Ch (up to 8-Ch), up to 4 MP, up to 4 Mbps per CH	Enhanced IP Mode On: 8-Ch (up to 16-Ch), up to 4 MP, up to 4 Mbps per CH	Enhanced IP Mode On: 16-Ch (up to 32-Ch), up to 4 MP, up to 4 Mbps per CH
Total Bandwidth	72 Mbps	96 Mbps	128 Mbps	96 Mbps	128 Mbps	128 Mbps
Video Output	VGA / HDMI up to 1920 x 1080, CVBS	VGA / HDMI up to 1920 x 1080, CVBS	VGA / HDMI up to 1920 x 1080, CVBS	HDMI up to 2K (2560 x 1440) / VGA up to 1080p, CVBS	HDMI up to 4K (3840 x 2160) / VGA up to 1080p, CVBS	HDMI up to 4K (3840 x 2160) / VGA up to 1080p, CVBS
Decoding Format	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Deep Learning Support	MD 2.0 or 2-Ch Human / Vehicle Detection VCA	MD 2.0 or 4-Ch Human / Vehicle Detection VCA	MD 2.0 or 4-Ch Human / Vehicle Detection VCA	MD 2.0 or 2-Ch Human / Vehicle Detection VCA	MD 2.0 or 4-Ch Human / Vehicle Detection VCA	MD 2.0 or 4-Ch Human / Vehicle Detection VCA
Playback Channel	4-Ch	8-Ch	16-Ch	4-Ch	8-Ch	16-Ch
Audio Channels (In / Out)	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA
Alarm Channels (In / Out)	-	8-Ch / 4-Ch	16-Ch / 4-Ch	-	8-Ch / 4-Ch	16-Ch / 4-Ch
Bandwidth, Connector	10/100 Mbps, 1 x RJ45	10/100 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45
Storage	Supports 1 x SATA up to 10 TB	Supports 1 x SATA up to 10 TB	Supports 2 x SATA up to 10 TB each	Supports 2 x SATA up to 10 TB each, NAS, IP SAN	Supports 2 x SATA up to 10 TB each, NAS, IP SAN	Supports 2 x SATA up to 10 TB each, NAS, IP SAN
PTZ Control	1 RS485	1 RS485	1 RS485	1 RS485	1 RS485	1 RS485
USB	2 x USB 2.0	2 x USB 2.0	1 x USB 2.0, 1 x USB 3.0	2 x USB 2.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0
Dimensions (W x D x H)	12.4" x 9.5" x 1.8"	12.4" x 9.5" x 1.8"	15" x 12.6" x 1.9"	12.4" x 9.5" x 1.8"	15" x 12.6" x 1.9"	15" x 12.6" x 1.9"
Product QR Code						

Enterprise Level DVR

SKU	LTD8416M-ST	LTD8432M-EA	LTD8432M-ST
			
Featuring	  	 	   
Analog Video Input	16-Ch (TVI / AHD / CVI / 960H) up to 8 MP	32-Ch (HD-TVI / AHD / CVI / 960H) up to 4 MP	32-Ch (HD-TVI / AHD / CVI / 960H) up to 8 MP
Analog Record Rate	8 MP @ 8 fps / 5 MP @ 12 fps / 2 MP @ 30 fps	4 MP Lite @ 15 fps / 1080p @ 15 fps	8 MP @ 8 fps / 5 MP @ 12 fps / 3 MP @ 18 fps
IPC Input	18-Ch, up to 12 MP, adjustable up to 34-Ch	16-Ch up to 6 MP, adjustable up to 48-Ch	32-Ch up to 12 MP, adjustable up to 64-Ch
Total Bandwidth	In: 160 Mbps; Out: 160 Mbps	In: 200 Mbps; Out: 160 Mbps	In: 320 Mbps; Out: 256 Mbps
Decoding Format	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Video Output	HDMI1 up to 4K (3840 x 2160) / VGA up to 1080p, HDMI2 up to 1080p, CVBS	HDMI1 / VGA up to 1920 x 1080, HDMI2 up to 4K (3840 x 2160), CVBS (704 x 480)	HDMI1 / VGA up to 1920 x 1080, HDMI2 up to 4K (3840 x 2160), CVBS (704 x 480)
Playback Channel	16-Ch	16-Ch	16-Ch
Audio Channels (In / Out)	4-Ch / 2-Ch, RCA	4-Ch / 1-Ch, RCA	4-Ch / 1-Ch, RCA
Alarm Channels (In / Out)	16-Ch / 4-Ch	16-Ch / 4-Ch	16-Ch / 4-Ch
Bandwidth, Connector	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 2 x RJ45
Storage	Supports 4 x SATA up to 12 TB each, NAS, IP SAN	Supports 4 x SATA up to 12 TB each, NAS, IP SAN, support eSATA	Supports 4 x SATA up to 12 TB each, NAS, IP SAN, support eSATA
USB	2 x USB 2.0, 1 x USB 3.0	2 x USB 2.0, 1 x USB 3.0	2 x USB 2.0, 1 x USB 3.0
PTZ Control	RS-485 (Full-Duplex), Keyboard	RS-485 (Full-Duplex), Keyboard	RS-485 (Full-Duplex), Keyboard
POSS Supported	8 (TCP or RS232)	8 (TCP or RS232)	8 (TCP or RS232)
Dimensions (W x D x H)	17.5" x 15.7" x 2.8"	17.5" x 15.7" x 2.8"	17.5" x 15.7" x 2.8"
Product QR Code			

Color 24/7 HD-TVI Camera

SKU	CMHT1722NW-28CF	CMHT2552-28CF	CMHT1752W-28CF	CMHT1782W-28CF	CMHR9222NW-28CFN	CMHR9252W-28CFN						
												
Featuring	 	  	  	  	  	  						
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2592 × 1944 @ 20 fps	5 MP, 2560 x 1944 @ 20 fps	8 MP, 3840 × 2160 @ 15 fps	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps						
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed						
Min. Illumination	0.0005 Lux @ F1.0	0.001 Lux @ F1.0	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0						
Supplemental Lighting	Clear White LEDs up to 65 ft	2 Supp. Lights up to 130 ft	Clear White LEDs up to 65 ft	Clear White LEDs up to 130 ft	Clear White LEDs up to 130 ft	Clear White LEDs up to 130 ft						
WDR	True WDR 130 dB	DWDR	True WDR 130 dB	True WDR 130 dB	True WDR 130 dB	True WDR 120 dB						
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable						
Protection	IP67	IP67	IP67	IP67	IP67	IP67						
Power	12V DC	12V DC	12V DC	12V DC	12V DC	12V DC						
Product QR Code												
Compatible Accessories	Compatible with Designated Cameras Above											
	 LTB03-W Junction Box for CMHT17XX	 LTB307 Junction Box for CMHT17XX	 LTB301 Wall Mount for CMHT17XX	 LTB342-JBOX Junction Box for Wall Mount LTB301	 LTB371 Pendant Mount 21.5" (55cm) for CMHT17XX	 LTB378 Pole Mount for CMHT17XX	 LTB379 Corner Mount for CMHT17XX	 LTB251 Junction Box for CMHT2552	 LTB251A Junction Box for CMHT2552	 LTB252 Wall Mount for CMHT2552	 LTB345 Junction Box for CMHR6422W / 92XX	 LTB232 Junction Box for CMHT2322

Turret Fixed Lens HD-TVI Camera

SKU	CMHT2122-28LF	CMHT1722WE-28F	CMHT1752N-28F	CMHT1752WE-28F	CMHT2152-28LFA	CMHT1782-28F	
							
Featuring		 		 	 	 	
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps	5 MP, 2560 x 1944 @ 20 fps	5 MP, 2960 x 1665 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps	
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	
Min. Illumination	0.02 Lux @ F2.2	0.005 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.01 Lux @ F1.2	
Supplemental Lighting	Up to 65 ft	Matrix IR up to 165 ft	Matrix IR up to 130 ft	Matrix IR up to 200 ft	IR up to 100 ft, White Light up to 66 ft	Matrix IR up to 200 ft	
WDR	DWDR	True WDR 120 dB	DWDR	True WDR 130 dB	DWDR	DWDR	
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	
Protection	IP67	IP67	IP67	IP67	IP67	IP67	
Power	12V DC	12V DC	12V DC	12V DC	12V DC	12V DC	
Product QR Code							
Compatible Accessories	Compatible with Designated Cameras Above					Compatible with All Cameras	
							
	LTB307 Junction Box for CMHT17XX	LTB03-W Junction Box for CMHT17XX	LTB345 Junction Box for CMHT21XX	LTB301 Wall Mount for CMHT17XX	LTB342-110T Wall Mount for CMHT21XX	LTB371 Pendant Mount 21.5" (55cm) for CMHT17XX	LTB378 Pole Mount
							
							LTB379 Corner Mount


Turret Vari-focal Lens HD-TVI Camera

SKU	CMHT1953-ZF		
			
Featuring			
Max. Resolution	5 MP, 2560 x 1944 @ 20 fps		
Lens	2.7 - 13.5 mm, VF, Motorized		
Min. Illumination	0.01 Lux @ F1.2		
Supplemental Lighting	Matrix IR up to 130 ft		
WDR	DWDR		
Output	TVI / AHD / CVI / 960H Switchable		
Protection	IP67		
Power	12V DC		
Product QR Code			
Compatible Accessories	Compatible with CMHT1953-ZF		
	 LTB307 Junction Box (White)		 LTB301 Wall Mount
	 LTB342-JBOX Junction Box for Wall Mount	 LTB378 Pole Mount	 LTB379 Corner Mount

Dome Fixed Lens HD-TVI Camera

SKU	CMHD7322WE-28F	CMHD7352N-28F	CMHD7352WE-28F	CMHD7382-28F
				
Featuring	 		 	  
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps	5 MP, 2560 x 1944 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps
Lens	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed
Min. Illumination	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2
Supplemental Lighting	Matrix IR up to 100 ft	Matrix IR up to 65 ft	Matrix IR up to 100 ft	Matrix IR up to 100 ft
WDR	True WDR 130 dB	DWDR	True WDR 130 dB	DWDR
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable
Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Range of Motion	3-Axis	3-Axis	3-Axis	3-Axis
Power	12V DC	12V DC	12V DC	12V DC
Product QR Code				
Compatible Accessories	Compatible with Cameras Above			
	 LTB347 Junction Box (White)	 LTB349 Angled Ceiling Mount (15°)	 LTB348 Wall Mount (White)	
	 LTB342-110 Wall Mount	 LTB376 Pendant Mount 22" (56cm)	 LTB378 Pole Mount	 LTB379 Corner Mount

Dome Vari-focal Lens HD-TVI Camera		
SKU	CMHD3523DWE-ZF	CMHD3453D-ZFN
	 Junction Box Included	
Featuring	   	 
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps
Lens	2.7 - 13.5 mm, Auto Focus VF, Motorized	2.7 - 13.5 mm, VF, Motorized
Min. Illumination	0.003 Lux @ F1.2	0.01 Lux @ F1.2
Supplemental Lighting	Matrix IR up to 200 ft	Matrix IR up to 130 ft
WDR	True WDR 130 dB	DWDR
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable
Protection	IP67, IK10	IP67, IK10
Range of Motion	3-Axis	3-Axis
Power	12V DC, 24V AC	12V DC, 24V AC
Product QR Code		
Compatible Accessories	Compatible with Designated Cameras Above	
	 LTB342-140 Wall Mount for CMHD3523DWE	 LTB342-JBOX Junction Box for Wall Mount LTB342-140
		 LTB340 In-Ceiling Mount for CMHD3523DWE
	 LTB453 Junction Box for CMHD3453D-ZFN	 LTB378 Pole Mount for CMHD3453D / 3523DWE
		 LTB379 Corner Mount for CMHD3453D / 3523DWE

Bullet Fixed Lens HD-TVI Camera			
SKU	CMHR6222	CMHR6422WE-28F	CMHR6452N-28F
			
Featuring		 	
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps
Lens	3.6 mm	2.8 mm	2.8 mm
Min. Illumination	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2
Supplemental Lighting	IR up to 65 ft	Matrix IR up to 100 ft	Matrix IR up to 65 ft
WDR	-	True WDR 130 dB	DWDR
Output	HD-TVI	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable
Protection	IP66	IP67	IP67
Power	12V DC	12V DC	12V DC
Product QR Code			
Compatible Accessories	Compatible with Cameras Above		
	 LTB345 Junction Box		

Bullet Fixed Lens HD-TVI Camera						Bullet Vari-focal Lens HD-TVI		
SKU	CMHR9422N-F	CMHR9222WE-28FN	CMHR9252N-28FN	CMHR9252WE-28F	CMHR9282-28F	CMHR9623DWE-ZF	CMHR9653D-ZFN	CMHR6123DWA
	 Junction Box Included			 Junction Box Included	 Junction Box Included	 Junction Box Included		 Junction Box Included
Featuring		 		 	 	  		 
Max. Resolution	2 MP, 1920 x 1080 @ 30 fps	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps	5 MP, 2560 x 1944 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps	2 MP, 1920 x 1080 @ 30 fps	5 MP, 2560 x 1944 @ 20 fps	2 MP, 1920 x 1080 @ 30 fps
Lens	3.6 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed	2.7 - 13.5 mm, Auto Focus VF, Motorized	2.7 - 13.5 mm, VF, Motorized	5 - 50 mm, Auto Focus VF
Min. Illumination	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.01 Lux @ F1.2
Supplemental Lighting	Matrix IR up to 130 ft	Matrix IR up to 200 ft	Matrix IR up to 130 ft	Matrix IR up to 200 ft	Matrix IR up to 200 ft	Matrix IR up to 263 ft	Matrix IR up to 130 ft	Matrix IR up to 360 ft
WDR	DWDR	True WDR 130 dB	DWDR	True WDR 130 dB	DWDR	True WDR 130 dB	DWDR	True WDR 120 dB
Output	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	TVI / AHD / CVI / 960H Switchable	HD-TVI, CVBS Output
Protection	IP67	IP67	IP67	IP67	IP67	IP67	IP67	IP66
Power	12V DC	12V DC	12V DC	12V DC	12V DC	12V DC, 24V AC	12V DC, 24V AC	12V DC, 24V AC
Product QR Code								
Compatible Accessory		Compatible with CMHR9222WE / 9252N					Compatible with CMHR9653D-ZFN	
		 LTB345 Junction Box					 LTB801 Junction Box	



Download LTS Pro-VS App on



Apple Store



Google Play

Pro-VS



VMS Integration Partners    

NVR

SKU	VSN8104-P4	VSN8208-P8	VSN7216-P16	VSN8216-P16
			 *Not Compatible with MD 2.0	
Featuring				
Video Input	4-Ch IP @ 80 Mbps	8-Ch IP @ 320 Mbps	16-Ch IP @ 160 Mbps	16-Ch IP @ 320 Mbps
Video Output	HDMI up to 4K (3840 x 2160) / VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI up to 4K (3840 x 2160) / VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p
Max. Recording Resolution	Up to 8 MP (3840 x 2160)	Up to 12 MP (4247 x 2826)	Up to 8 MP (3840 x 2160)	Up to 12 MP (4247 x 2826)
Decoding Format	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264
Decoding Capability	4-Ch @ 8 MP / 8-Ch @ 4 MP	2-Ch @ 8 MP / 5-Ch @ 4 MP	2-Ch @ 8 MP / 4-Ch @ 4 MP	2-Ch @ 8 MP / 5-Ch @ 4 MP
Max. Playback Resolution	Up to 8 MP (3840 x 2160)	Up to 12 MP (4247 x 2826)	Up to 8 MP (3840 x 2160)	Up to 12 MP (4247 x 2826)
Audio Channels (In / Out)	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA
Alarm Channels (In / Out)	-	8-Ch / 2-Ch	4-Ch / 1-Ch	8-Ch / 2-Ch
Built-in PoE	4-Ch	8-Ch	16-Ch	16-Ch
Bandwidth, Connector	10/100 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45
Storage	Supports 1 x SATA up to 8 TB each	Supports 2 x SATA up to 10 TB each	Supports 2 x SATA up to 10 TB each	Supports 2 x SATA up to 10 TB each
Backup	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0
Dimensions (W x D x H)	10.2" x 8.7" x 1.8"	15.0" x 12.4" x 2.1"	14.9" x 12.4" x 2.1"	15.0" x 12.4" x 2.1"
Recorder Case	Mini 1U	1U	1U	1U
Product QR Code				
Compatible Accessories	-	Rack Mount (VSRM72) Sold Separately	Rack Mount (VSRM72) Sold Separately	Rack Mount (VSRM72) Sold Separately

NVR

SKU	VSN7432-P16	VSN8432	VSN8432-P16	VSN8864-R
	 *Not Compatible with MD 2.0			
Featuring				
Video Input	32-Ch IP @ 160 Mbps	32-Ch IP @ 320 Mbps	32-Ch IP @ 320 Mbps	64-Ch IP @ 384 Mbps
Video Output	HDMI up to 4K (3840 x 2160) / VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI up to 4K (3840 x 2160), VGA up to 1080p	HDMI1 up to 4K (3840 x 2160), HDMI2 up to 4K, VGA up to 1080p
Max. Recording Resolution	Up to 8 MP (3840 x 2160)	Up to 12 MP (4247 x 2826)	Up to 12 MP (4247 x 2826)	Up to 12 MP (4247 x 2826)
Decoding Format	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264
Decoding Capability	2-Ch @ 8 MP / 4-Ch @ 4 MP	2-Ch @ 8 MP / 5-Ch @ 4 MP	2-Ch @ 8 MP / 5-Ch @ 4 MP	4-Ch @ 8 MP / 8-Ch @ 4 MP
Max. Playback Resolution	Up to 8 MP (3840 x 2160)	Up to 12 MP (4247 x 2826)	Up to 12 MP (4247 x 2826)	Up to 12 MP (4247 x 2826)
Audio Channels (In / Out)	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA
Alarm Channels (In / Out)	16-Ch / 4-Ch	16-Ch / 4-Ch	16-Ch / 4-Ch	16-Ch / 4-Ch
Built-in PoE	16-Ch	-	16-Ch	-
Bandwidth, Connector	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 2 x RJ45	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 2 x RJ45
Storage	Supports 4 x SATA up to 14 TB each	Supports 4 x SATA up to 6 TB each; RAID 1, 5	Supports 4 x SATA up to 10 TB each; RAID 1, 5	Supports 8 x SATA up to 10 TB each; RAID 0, 1, 5, 6, 10
Backup	1 x USB 2.0, 1 x USB 3.0	2 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0	2 x USB 2.0, 1 x USB 3.0
Dimensions (W x D x H)	15.7" x 14.2" x 2.9"	17.3" x 13.5" x 1.9"	15.7" x 14.3" x 2.9"	17.4" x 16.8" x 3.5"
Recorder Case	1.5U	1.5U	1.5U	2U
Product QR Code				
Compatible Accessories	Rack Mount Included	Rack Mount Included	Rack Mount Included	Rack Mount Included

VMS			
SKU	VSVMS-500	VSVMS-2000	VSVMS-10K
			
Featuring	H.265+ 4K	H.265+	H.265
Video Input	250 Devices, 500 CH @ 512 Mbps	1000 Devices, 2000 CH @ 512 Mbps	2000 Devices, 10,000 CH @ 1024 Mbps per server; 30,000 CH with Hierarchical Structure
Video Output	HDMI up to 4K / VGA up to 1080p	No GUI	No GUI
Max. Recording Resolution	Up to 12 MP (4247 x 2826)	Up to 12 MP (4247 x 2826)	Up to 12 MP (4247 x 2826)
Decoding Format	H.265 / H.264	H.265+ / H.265 / H.264	H.265 / H.264
User Management	50 Online Users	300 Online Users	1000 Online Users
Power Output	12V DC	12V DC	-
Alarm Channels (In / Out)	24-Ch / 8-Ch	24-Ch / 8-Ch	-
Bandwidth, Connector	10/100/1000 Mbps, 4 x RJ45	10/100/1000 Mbps, 4 x RJ45; 1000 Mbps 2 SFP	10/100/1000 Mbps, 3 x RJ45
Storage	Pro-VS IP SAN	Supports 16 x SATA up to 14 TB each; RAID 0 / 1 / 5 / 6 / 10 / 50 / 60	Pro-VS IP SAN
Backup	4 USB 3.0	4 USB 3.0	4 USB 3.0
Dimensions (W x D x H)	17.3" x 13.6" x 1.9"	18.8" x 19" x 5.1"	19" x 21.7" x 3.4"
Product QR Code			
Accessory	Rack Mount Included	Rack Mount Included	-

PRO-VS VMS

16HDD | 500CH, 2,000CH, 10,000CH Video Input Options



Up to **10,000 channels**
in a single server

... Up to **30,000 channels**
in a hierarchical structure

Turret Fixed Lens Camera


SKU	VSIP3442W-28MDA VSIP3442WB-28MDA VSIP3442W-MDA	VSIP3182W-28MDA VSIP3182WB-28MDA VSIP3182W-MDA	VSIP3C52W-28MA	VSIP3C82W-28MDA		
						
Featuring	    	     	     	        		
Max. Resolution	4 MP, 2688 x 1520 @ 25 fps	8 MP, 3840 x 2160 @ 20 fps	5 MP, 2880 x 1620 @ 30 fps	8 MP, 3840 x 2160 @ 30 fps		
Lens	2.8 / 4 mm, Fixed	2.8 / 4 mm, Fixed	2.8 mm, Fixed	2.8 mm, Fixed		
Min. Illumination	0.003 Lux @ F1.6	0.005 Lux @ F1.6	0.001 Lux @ F1.0	0.001 Lux @ F1.0		
Compression	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264 / MJPEG		
Supplemental Lighting	Smart IR LED up to 100 ft	Smart IR LED up to 100 ft	Smart LED up to 100 ft	Smart LED up to 100 ft		
Special Features	MD 2.0, True WDR 120 dB, HLC, Defog	MD 2.0, True WDR 120 dB, HLC, Defog	MD 2.0, True WDR 120 dB, HLC, Defog	MD 2.0, True WDR 120 dB, HLC, Defog		
Audio In / Out	Built-in Mic	Built-in Mic	Built-in Mic	Built-in Mic, 1-Ch / 1-Ch		
Alarm In / Out	-	-	-	1-Ch / 1-Ch		
Storage	MicroSD up to 256 GB	MicroSD up to 256 GB	MicroSD up to 256 GB, Auto Network Replenishment	MicroSD up to 256 GB, Auto Network Replenishment		
Range of Motion	3-Axis	3-Axis	3-Axis	3-Axis		
Protection	IP67	IP67	IP67, 2KV Surge Protection	IP67, IK10		
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE		
Product QR Code	 2.8 mm Lens, White  2.8 mm Lens, Black  4 mm Lens	 2.8 mm Lens, White  2.8 mm Lens, Black  4 mm Lens				
Compatible Accessories	Compatible with Cameras Above			Compatible with VSIP3C82W-28MDA		
	 VSJB742 Junction Box	 VSWM342 Wall Mount	 VSPD342 Pendant Mount	 VSJM342 Pole Mount	 VSJB763 Junction Box	 VSWM763 Wall Mount

Dome Fixed Lens Camera				Bullet Fixed Lens Camera	
SKU	VSIP7442W-28S	VSIP7442W-28MD VSIP7442W-MD	VSIP7182W-28MDA VSIP7182W-MDA	VSIP8342W-28MDA VSIP8342W-MDA	VSIP8382W-28MDA VSIP8382W-MDA
					
Featuring	    	    	    	    	    
Max. Resolution	4 MP, 2592 × 1520 @ 30 fps	4 MP, 2688 x 1520 @ 25 fps	8 MP, 3840 × 2160 @ 20 fps	4 MP, 2688 x 1520 @ 25 fps	8 MP, 3840 × 2160 @ 20 fps
Lens	2.8 mm, Fixed	2.8 / 4 mm, Fixed	2.8 / 4 mm, Fixed	2.8 / 4 mm, Fixed	2.8 / 4 mm, Fixed
Min. Illumination	0.01 Lux @ F2.0	0.003 Lux @ F1.6	0.005 Lux @ F1.6	0.003 Lux @ F1.6	0.005 Lux @ F1.6
Compression	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG
Supplemental Lighting	Smart IR LED up to 100 ft	Smart LED up to 100 ft	Smart LED up to 100 ft	Smart IR LED up to 165 ft	Smart IR LED up to 165 ft
Special Features	True WDR 120 dB, HLC, Defog	MD 2.0, True WDR 120 dB, HLC, Defog	MD 2.0, True WDR 120 dB, HLC, Defog	MD 2.0, True WDR 120 dB, HLC, Defog	MD 2.0, True WDR 120 dB, HLC, Defog
Audio In / Out	1-Ch / 1-Ch	-	Built-in Mic	Built-in Mic	Built-in Mic
Storage	MicroSD up to 256 GB, Auto Network Replenishment	MicroSD Slot up to 256 GB	MicroSD Slot up to 256 GB	MicroSD Slot up to 256 GB	MicroSD Slot up to 256 GB
Range of Motion	3-Axis	3-Axis	3-Axis	3-Axis	3-Axis
Protection	IP67, IK10, 2KV Surge Protection	IP67, IK10	IP67, IK10	IP67	IP67
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE
Product QR Code		 2.8 mm Lens  4 mm Lens	 2.8 mm Lens  4 mm Lens	 2.8 mm Lens  4 mm Lens	 2.8 mm Lens  4 mm Lens
Compatible Accessories	Compatible with Cameras Above			Compatible with Bullet Cameras VSIP8342W / VSIP8382W	
	 VSJB742 Junction Box	 VSWM342 Wall Mount	 VSPD342 Pendant Mount	 VSPM342 Pole Mount	 VSJB973 Junction Box

Vari-focal Lens Camera					
SKU	VSIP3643W-MDAZ	VSIP7643W-SZ	VSIP7643W-MDAZ	VSIP9643W-SZ	VSIP9743W-MDAZ
					
	Junction Box Included	Junction Box Included	Junction Box Included	Junction Box Included	Junction Box Included
Featuring	     	     	     	     	     
Max. Resolution	4 MP, 2688 x 1520 @ 25 fps	4 MP, 2592 x 1520 @ 30 fps	4 MP, 2688 x 1520 @ 25 fps	4 MP, 2592 x 1520 @ 30 fps	4 MP, 2688 x 1520 @ 25 fps
Lens	2.8 - 12 mm, Auto Focus Motorized Zoom	2.8 - 12 mm, Auto Focus Motorized Zoom	2.8 - 12 mm, Auto Focus Motorized Zoom	2.8 - 12 mm, Auto Focus Motorized Zoom	2.8 - 12 mm, Auto Focus Motorized Zoom
Min. Illumination	0.003 Lux @ F1.6	0.003 Lux @ F1.6	0.003 Lux @ F1.6	0.003 Lux @ F1.6	0.003 Lux @ F1.6
Compression	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264 / MJPEG
Supplemental Lighting	Smart LED up to 130 ft	Smart IR LED up to 100 ft	Smart LED up to 130 ft	Smart IR LED up to 165 ft	Smart IR LED up to 165 ft
Special Features	MD 2.0, True WDR 120 dB, HLC, Defog	True WDR 120 dB, HLC, Digital Defog	MD 2.0, True WDR 120 dB, HLC, Defog	True WDR 120 dB, HLC, Digital Defog	MD 2.0, True WDR 120 dB, HLC, Defog
Audio In / Out	Built-in Mic	1-Ch / 1-Ch	Built-in Mic	1-Ch / 1-Ch	Built-in Mic
Alarm In / Out	-	1-Ch / 1-Ch	-	1-Ch / 1-Ch	-
Storage	MicroSD Slot up to 256 GB	MicroSD up to 256 GB, Auto Network Replenishment	MicroSD Slot up to 256 GB	MicroSD up to 256 GB, Auto Network Replenishment	MicroSD Slot up to 256 GB
Range of Motion	3-Axis	3-Axis	3-Axis	3-Axis	3-Axis
Protection	IP67, IK10	IP67, IK10, 6KV Surge Protection	IP67, IK10	IP67, 6KV Surge Protection	IP67, IK10
Power	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE	12V DC, PoE
Product QR Code					
Compatible Accessories	Compatible with VSIP3643W, VSIP7643W-SZ and VSIP7643W-MDAZ			Compatible with VSIP9643W and VSIP9743W	
	 VSPM763 Wall Mount	 VSPM342 Pole Mount for VSIP36/7643W-MDAZ	 VSPD342 Pendant Mount for VSIP36/7643W-MDAZ	 VSPM963 Pole Mount	

Fisheye Camera		
SKU	VSIP7552FW-SE	VSIP75122F-SE
		
Featuring	      	      
Max. Resolution	5 MP, 2592 x 1944 @ 30 fps	12 MP, 4000 x 3000 @ 20 fps
Lens	1.4 mm	1.8 mm
Min. Illumination	0.01 Lux @ F2.0	0.03 Lux @ F2.0
Compression	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG
Supplemental Lighting	Smart LED up to 33 ft	Smart LED up to 49 ft
Special Features	True WDR 120 dB, Defog	True WDR 120 dB, Defog, Front End De-warping
Audio In / Out	Built-in Mic, 1-Ch / 1-Ch	Built-in Mic, 1-Ch / 1-Ch
Alarm In / Out	1-Ch / 1-Ch	2-Ch / 1-Ch
Storage	MicroSD up to 256 GB, Auto Network Replenishment	MicroSD up to 256 GB, Auto Network Replenishment
Protection	IP66, IK10	IP66, IK10
Power	12V DC, PoE	12V DC, PoE
Dimensions	Φ 4.9" x 1.7"	Φ 5.9" x 2.2"
Product QR Code		
Accessories	Junction Box VSJB763 Sold Separately	Junction Box VSJB122 Sold Separately
Compatible Accessories	 VSJB763 Fixed Dome Junction Box	 VSJB122 Junction Box

PTZ Camera

SKU	VSPTZIP3122WSL-X4IR	VSPTZIP4C44WSL-X25IR	VSPTZIP424X25WIR	VSPTZIP674X33WIR		
						
Featuring	     	      	     	     		
Max. Resolution	Wide Angle: 2 MP, 25 fps; PTZ: 2 MP, 25 fps	4 MP, 2688 × 1520 @ 30 fps	4 MP, 2688 × 1520 @ 30 fps	4 MP, 2688 × 1520 @ 30 fps		
Lens and Zoom	2.8 mm; 2.8 - 12 mm, 4x Optical Zoom, Auto Focus	4.8 - 120 mm, 25x Optical Zoom, Auto Focus	4.8 - 120 mm, 25x Optical Zoom, Auto Focus	4.5 - 148.5 mm, 33x Optical Zoom, Auto Focus		
Min. Illumination	0.002 Lux @ F1.6	0.0005 Lux @ F1.0	0.003 Lux @ F1.5	0.003 Lux @ F1.5		
Compression	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG		
Supplemental Lighting	Wide IR LED up to 33 ft; PTZ IR LED up to 160 ft and Supp. Light up to 33 ft	IR LED up to 330 ft	IR LED up to 330 ft	IR LED up to 500 ft		
Tracking	Linked Tracking	Smart Tracking	Smart Tracking	Smart Tracking		
Storage	MicroSD up to 256 GB, Auto Network Replenishment	MicroSD up to 256 GB, Auto Network Replenishment	MicroSD up to 256 GB, Auto Network Replenishment	MicroSD up to 256 GB, Auto Network Replenishment		
Range of Motion	18°±5°; 0° - 345°, -10° - 100°	Pan 0° - 360°, Tilt -15° - 90°	-15° - 90° (Auto-flip)	-15° - 90° (Auto-flip)		
Image Enhancement	120 dB WDR on Wide Angle; DWDR on PTZ	120 dB WDR	120 dB WDR	120 dB WDR		
Audio In / Out, Alarm In / Out	Built-in Mic & Speaker	Audio 1-Ch / 1-Ch, Alarm 2-Ch / 1-Ch	Audio 1-Ch / 1-Ch, Alarm 2-Ch / 1-Ch	Audio 1-Ch / 1-Ch, Alarm 1-Ch / 1-Ch		
Outdoor Protection	IP66	IP66	IP67, IK10	IP66, Metal Housing		
Power	12V DC 2A, PoE+ (802.3at), Max 16W	12V DC±25%, PoE+ (802.3at), Max 24W	12V DC 3A, PoE+ (802.3at), Max 21W	24V AC±25%, DC 24V±25%, PoE+ (802.3at), Max 25W		
Dimensions	Φ 3.5"	Φ 4"	Φ 4"	Φ 6"		
Product QR Code						
Accessories	Wall Mount / Ceiling Mount Bracket Included, PoE+ (30W) Not Included	Wall Mount Bracket, PoE+ (30W) Not Included	Wall Mount Bracket, PoE+ (30W) Not Included	Wall Mount Bracket, PoE+ (30W) Not Included		
Compatible Accessories	Compatible with VSPTZIP4C44WSL-X25IR, VSPTZIP424X25WIR and VSPTZIP674X33WIR					
	 VSWM424 Wall Mount		 VSWM674 Wall Mount		 VSCM643 Corner Mount	
			 VSPD643 Pendant Mount		 VSPM643 Pole Mount	
					 VSPP643 Parapet Mount	



Download DMSS App on



Apple Store



Google Play

Limited Collection

4K and Color 24/7
IP Camera and
Residential Solutions

NVR		
SKU	LTN6208N-P8	LTN6216N-P16
		
Featuring	 	 
Video Input	8-Ch IP @ 160 Mbps	16-Ch IP @ 160 Mbps
Video Output	HDMI up to 4K (3840 x 2160) / VGA up to 1080p	HDMI up to 4K (3840 x 2160) / VGA up to 1080p
Max. Recording Resolution	Up to 4K, 8 MP (3840 x 2160)	Up to 4K, 8 MP (3840 x 2160)
Decoding Format	H.265 / H.264	H.265 / H.264
Decoding Capability	2-Ch @ 4K or 8-Ch @ 1080p	2-Ch @ 4K or 8-Ch @ 1080p
Audio Channels (In / Out)	1-Ch / 1-Ch, RCA	1-Ch / 1-Ch, RCA
Alarm Channels (In / Out)	4-Ch / 2-Ch	4-Ch / 2-Ch
Built-in PoE	8-Ch	16-Ch
Bandwidth, Connector	10/100/1000 Mbps, 1 x RJ45	10/100/1000 Mbps, 1 x RJ45
Storage	2 x SATA up to 10 TB each	2 x SATA up to 10 TB each
Backup	1 x USB 2.0, 1 x USB 3.0	1 x USB 2.0, 1 x USB 3.0
Dimensions (W x D x H)	14.8" x 12.9" x 2.1"	14.8" x 12.9" x 2.1"
Product QR Code		

Color 24/7		SMD	Starlight
SKU	LTDHIP3542NW-28ISMLC	LTDHIP7742W-28MD LTDHIP7742W-36MD	LTDHIP7682NW-28M LTDHIP7682NW-36M
			
Featuring	    	    	    
Max. Resolution	4 MP, 2688 x 1520 @ 30 fps	4 MP, 2688 x 1520 @ 30 fps	8 MP, 3840 x 2160 @ 15 fps
Lens	2.8 mm, Fixed	2.8 / 3.6 mm, Fixed	2.8 / 3.6 mm, Fixed
Min. Illumination	0.003 Lux @ F1.0	0.005 Lux @ F1.6	0.009 Lux @ F2.0
Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG	H.265+ / H.265 / H.264+ / H.264 / MJPEG	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Image Sensor	1/2.7" 4 MP Progressive Scan CMOS	1/3" 4 MP Progressive Scan CMOS	1/2.7" 8 MP Progressive CMOS
Special Features	SMD, True WDR 120 dB, LED up to 100 ft	SMD, True WDR 120 dB, IR up to 165 ft	True WDR 120 dB, IR up to 100 ft
Audio In / Out	Built-in Mic	1-Ch / 1-Ch	-
Alarm In / Out	-	1-Ch / 1-Ch	-
MicroSD Storage	Up to 256 GB	Up to 256 GB	Up to 256 GB
Protection	IP67	IP67, IK10	IP67, IK10
Range of Motion	-	3-Axis	3-Axis
Product QR Code		  2.8 mm Lens 3.6 mm Lens	  2.8 mm Lens 3.6 mm Lens
Compatible Accessories	 PFA130-E Junction Box  PFB203W Wall Mount	 PFB203W Wall Mount	 PFB203W Wall Mount

Fixed Lens			Motorized Lens		
SKU	IP-8EB-F40-PAL		IP-8DM-F40-PAL	LTDHIP7663W-SZ	LTDHIP7683W-SZ
				 Junction Box Included	 Junction Box Included
Featuring					
Max. Resolution	8 MP, 3840 x 2160 @ 15 fps		8 MP, 3840 x 2160 @ 15 fps	6 MP, 3072 x 2048 @ 20 fps	8 MP, 3840 x 2160 @ 15 fps
Lens	4 mm, Fixed		4 mm, Fixed	2.7 - 13.5 mm, VF, Motorized	2.7 - 12 mm, VF, Motorized
Min. Illumination	0.07 Lux @ F2.0		0.07 Lux @ F2.0	0.03 Lux @ F1.4	0.05 Lux @ F1.4
Compression	H.265+ / H.265 / H.264+ / H.264		H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Image Sensor	1/2.5" 8 MP Progressive Scan CMOS		1/2.5" 8 MP Progressive Scan CMOS	1/2.9" 6 MP Progressive CMOS	1/2.5" 8 MP Progressive Scan CMOS
Special Features	True WDR 120 dB, IR up to 165 ft		True WDR 120 dB, IR up to 100 ft	True WDR 120 dB, IR up to 165 ft	True WDR 120 dB, IR up to 165 ft
Audio In / Out	Built-in Mic		1-Ch / 1-Ch	1-Ch / 1-Ch	1-Ch / 1-Ch
Alarm In / Out	-		1-Ch / 1-Ch	1-Ch / 1-Ch	1-Ch / 1-Ch
MicroSD Storage	Up to 128 GB		Up to 128 GB	Up to 128 GB	Up to 128 GB
Protection	IP67		IP67, IK10	IP67, IK10	IP67, IK10
Range of Motion	-		3-Axis	3-Axis	3-Axis
Product QR Code					
Compatible Accessories	 PFA130-E Junction Box	 PFB204W Wall Mount	 PFB203W Wall Mount	 PFB203W Wall Mount	 PFB203W Wall Mount

Hugolog

HU01-BLK		HU01-SNL		HU02-BLK		HU02-SNL			
									
• Electronic Deadbolt • Door Entry with Code/Key • Motorized Auto-Locking • IP54 Waterproof		• PIN entry with Physical Key Backup • 4 AA Batteries • Available in Black or Satin Nickel		• Electronic Deadbolt • Door Entry with Code/Key • Motorized Auto-Locking • IP54 Waterproof		• PIN entry with Physical Key Backup • 4 AA Batteries • Available in Black or Satin Nickel			
HU03-ORB		HU03-SNL		HU04-ORB		HU04-SNL		HU-BLG	
									
• Smart Lock with Touchscreen • Door Entry with Code/Key • Motorized Auto-Locking • IP54 Waterproof		• Remote Wireless Control Available with Free Mobile App and Bluetooth Hub • Available in Satin Nickel or Rubbed Bronze		• Smart Lock with Touchscreen • Door Entry with Code/Key • Motorized Auto-Locking • IP54 Waterproof		• Remote Wireless Control Available with Free Mobile App and Bluetooth Hub • Available in Satin Nickel or Rubbed Bronze		• Smart Lock Bluetooth Gateway • Works with HU03 and HU04 Smart Lock • Wireless Connection to Smart Lock & Wi-Fi • Remote Control Smart Lock over Internet	





Download LTS Connect App on



Apple Store



Google Play



Download X-VMS App on



Apple Store



Google Play

Intercom and Access Control


Scalable Entrance Security Solutions

IP Intercom Outdoor Station

LTH-303M-WIFI	LTH-302M-PS	LTH-401M-WIFI	LTH-401M-PS	LTK3410MF
 Door Station with WDR 2 MP IPC • Compact 4.7" x 2.2" x 0.8" • MIFARE Reader Calling Button • Single Office Application, Call App Directly • PoE or TCP / IP with 12V DC, IP65 	 Protective Shield • 5.90" x 3.13" x 1.91" • Polycarbonate • Compatible with LTH-301M-WIFI, LTH302M-WIFI and LTH303M-WIFI • Surface Mount 	 IP Door Station with Contact List • 7.16" x 3.33" x 1.01" • Contact List Function • Supports up to 500 Contacts • 4" Touchscreen • App Answering via Indoor Station • Large Physical Call Button • Face, Card, Key fob, and Code Entry • PoE or 12V DC with Wi-Fi • IP65, IK8 Vandal Proof, -40°F to 140°F (-40°C to 60°C) • Surface Mount 	 Protective Shield • 7.43" x 3.82" x 1.93" • Electro-Galvanized Steel Sheets • Compatible with LTH-401M-WIFI • Surface Mount 	 4" Touchscreen Door Station • 6.79" x 3.27" x 0.89" • Facial, Card, QR Code, and PIN • For Single Office: 1 Click Call App • For Multi-Tenant: Supports up to 500 Apartment Units • Add Indoor Station for App Access • IP65 • TCP / IP, 12V DC, • Add LTK-AQE30E for PoE 

IP Intercom Indoor Station

Management Software Options

LTH-D311GY-WIFI	LTH-D311-DESK	NVMS V3 PC Software + LTS Connect App	X-VMS VMS Windows Software + X-VMS App	LTK100ME
 IP Video Indoor Station • 7" Touch Screen • New Design • NVMS V3 PC • Allows App Access for Door Stations • PoE, 12V DC, Wi-Fi • Up to 17 per Office 	 Desk Stand • Designed for LTH-D311GY-WIFI 	 Manage Surveillance, Access Control and Intercom • Only 1 PC for Access Control Purposes • LTS Connect App Supports Single Door Controllers and Intercom • Answer and Unlock Doors via App • Up to 256 Video and 50 Door Channels • Time Attendance, E-Map 	 VMS for LTS Surveillance, Access Control and Intercom • Supports Multiple Users from Different Computers and Smartphones • Controls Multi-Door and Single Door Controllers and Intercom • Project-based Pricing • Web for Config, Software for Operation 	 LTS MIFARE USB Issuer • Supports Both NVMS and X-VMS • Easy Enrolling Cards at Client PC • UL Listed 

Controllers and Readers |

Multi-Door Controller

Card Readers for LTS Controllers

MIFARE Credentials

LTK2802 LTK2804		LTK1107M	LTK1107MK	LTK1108M	LTK1108MK	LTKC1356M	LTKF1356M	LTKF1356M-T
		 	 	 	 	 	 	 
LTS 2 Door Controller • Secure Metal Closure with Lock • Supports 4 Wiegand 26 / 34 bit Readers • Up to 10,000 Cards and 50,000 Events • Built-in 12V DC 8.5A Power Supply 	LTS 4 Door Controller • Secure Metal Closure with Lock • Supports 4 Wiegand 26 / 34 bit Readers • Up to 10,000 Cards and 50,000 Events • Built-in 12V DC 8.5A Power Supply 	LTS Slim Reader • Wiegand 26 / 34 • MIFARE Classic • IP65 • -K includes Keypad		LTS Single Gang Reader • Wiegand 26 / 34 • MIFARE Classic • IP65 • -K includes Keypad		LTS MIFARE Card • 13.56 MIFARE Classic • 8- and 10-Digit # Printed	LTS MIFARE Key Fob	LTS MIFARE Thick Key Fob

Alarm Controls and Securitron Maglocks and Accessories

LTK-600S	LTK-1200S	LTK-600WP	LTK-1200WP	LTK-600D	LTK-1200D	LTK-AM3370	LTK-AM6370
							
- Alarm Controls Maglock 600lb / 1200lb Holding Force, UL294 and UL10C - Add AM3370 / 6370 if Door Opens Inwards		- Alarm Controls Waterproof Maglock 600lb / 1200lb, Swinging or Sliding Gate - Add AM3370 / 6370 as Gate Bracket		- Alarm Controls Double Door Maglock 600lb / 1200lb Holding Force, UL294 and UL10C - Add AM3375 / 6375 or 2x AM3370 / 6370 if Door Opens Inwards		- Alarm Controls LZ Bracket - For Mounting Maglocks onto Inward Swinging Doors - AM3370 for 600 Series and AM6370 for 1200 Series	

Add Two Means of Egress to Your Maglock Installation

LTK-TS-2	LTK-TS-2-2	LTK-TS-2T	LTK-NTS-1	LTK-TS-14	LTK-TS-60	LTK-SREX-100	LTK-XMS	LTK-REB-1
								
- Alarm Controls Green Push Button 2" SQ Illuminated "Push to Exit," UL294 Listed - TS-2 is SPDT; TS-2-2 is DPDT; TS-2T is SPDT with 2-45s Timer			- Alarm Controls No Touch Sensor with 1-35s Timer - Single Gang Stainless Steel Wall Plate, SPDT	- Alarm Controls Pushbutton with 2-60s Pneumatic Timer, UL294 Listed 1.5" Large Green / 2.5" Extra Large Red Mushroom Button "Push To Exit", SPDT		- Alarm Controls Focused RTE Motion Sensor - DPDT, UL294 Listed, 3-Year Warranty	- Securitron Adjustable Pattern RTE Motion Sensor - NC only, UL294 Listed, Lifetime Warranty	- Alarm Controls Pushbar & Door Loop, DPDT 34.5" Request to Exit Pushbar, 18" Door Loop Included

Get a Certified Power Supply that Can Integrate with Fire Alarm

LTK-AQD4-4C1R1	LTK-AQD6-8C8R2	LTK-AQL6-B100R8E1	LTK-AQS1216-16F16R2
			
12 or 24V DC 4A with 4 PTC Output	12 or 24V DC 6A with 8 PTC Output	12 and 24V DC 6A with 8 Fuse Output	12V DC 16A with 16 Fuse Output
- Securitron AQ Series Power Supply with MagnaCare® Lifetime Replacement, No Fault Warranty - Protected Outputs with Alarm Interface, Cuts Off Power of Maglocks from the Source when Fire Alarm Triggered			
UL294, UL603, ULC-S318, ULC-S533 Listed; RoHS Compliant and REACH Compliant			

***All HES, Securitron, Adams Rite and Alarm Controls products are available to order through LTS.**

Select Electrical Strikes According to Existing Door Hardware

Electrical Strike for Cylindrical Latch

LTK-5000C	LTK-8000C	LTK-AES-300-12	LTK-AES-300-24
			
• HES 5000 Strike with 501 and 501A Faceplates • ANSI Metal Jamb or Aluminum Frames • Dual Voltage 12V / 24V DC/AC, UL1034, UL294 Listed	• HES 8000 Strike with 801 and 801A Faceplates • Easy Installation with No Cutting on ANSI Frames • Dual Voltage 12V / 24V DC/AC, UL1034, UL294 Listed	• AES-300 Strike with All Faceplates Included • Ultra Compact for Minimum Cutting on Wood Frames • 300-12 12V DC/AC; 300-24 24V DC/AC, UL1034 Listed	

For Mortise Latch:	Mounting Tabs for Storefront	Change Deadbolt to Mortise Latch on Storefront	
LTK-1500C	LTK-152	LTK-4900-25-628	LTK-4900-26-628
			
• HES 1500 Strike with 1J, 1K, 1KD and 1KM Faceplates • Stainless Steel Construction with 10-Year No-Fault Warranty • Dual Voltage 12V / 24V DC/AC, UL294, UL10C 3 Hours	• HES 152: Universal Mounting Tabs • Mount Inside Hollow Metal and Aluminum Jamb • Compatible with 5000, 8000, 7400, 1500, 1600 and More	• Adams Rite Mortise Latch, Clear Anodized Finish • Drop-in Replacement for Many Deadbolt and Hook Bolt Locks • 31" / 32" Backset, -25 LH or RHR, -26 RH or LHR	

For RIM Exit Devices (Push Bar):

LTK-9400	LTK-9600	LTK-9500
		
• HES 9000 Series Slim-line Strike • Surface Mounted, No Cutting Needed • For 1/2" Pullman Latch • UL294 Listed	• HES 9000 Series Slim-line Strike • Surface Mounted, No Cutting Needed • For 3/4" Pullman Latch • UL294 Listed	• HES 9000 Series Slim-line Strike • Surface Mounted, No Cutting Needed • For 3/4" Pullman Latch • UL294, UL10C 3 Hours Fire Rated

*All HES, Securitron, Adams Rite and Alarm Controls products are available to order through LTS.



airMAX[®]




SERVICE CODE :
UBNT-SERVICE

Accessories

*airMAX® setup service available for \$25 per unit

airMAX® WIRELESS				UniFi® WIRELESS			
NanoBeam / LiteBeam / PowerBeam		Rocket & Antenna					
	UBNT-NBE-M5-16 5 GHz NanoBeam M5 • 16 dBi, 150+ Mbps, 10+ km		UBNT-ROCKET-M5 5 GHz Rocket M5 BaseStation • 150+ Mbps		UBNT-U6-LITE-US Access Point U6 Lite • 5 GHz Wi-Fi 6 band, 2.4 GHz Wi-Fi 4 band		UBNT-UAP-AC-PRO-US UniFi AP, AC PRO • 450 Mbps @ 2.4GHz, 1300 Mbps @ 5GHz
	UBNT-NBE-5AC-GEN2 5 GHz NanoBeam AC, Gen2 • 19 dBi, 450+ Mbps, 15+ km		UBNT-R5AC-LITE 5 GHz Rocket AC BaseStation • 500+ Mbps		UBNT-U6-PRO-US Access Point U6 Pro • Wi-Fi 6 support (2.4 / 5 GHz bands)		UBNT-UAP-AC-PRO-5-US Access Point AC Pro (5-Packs) • 2.4/5 GHz Wi-Fi 5 bands (3x3 MIMO)
	UBNT-LBE-5AC-GEN2 5 GHz LiteBeam AC, Gen2 • 23 dBi, 450+ Mbps, 10+ km		UBNT-AMO-5G10 5 GHz airMAX Omni Antenna • 10 dBi, 360° Coverage		UBNT-U6-LR-US Access Point U6 Long-Range • 5 GHz Wi-Fi 6 band (4x4), 2.4 GHz Wi-Fi 4 band (4x4)		UBNT-UAP-AC-HD-US UniFi AP, AC HD • 800 Mbps @ 2.4GHz, 1733 Mbps @ 5GHz
	UBNT-LAP-120-US 5GHz LiteBeam AC AP, 120° • 16 dBi, 450+ Mbps, 10+ km		UBNT-AMO-5G13 5 GHz airMAX Omni Antenna • 13 dBi, 360° Coverage		UBNT-U6-MESH-US Access Point U6 Mesh • Wi-Fi 6 support (2.4/5 GHz bands)		UBNT-UAP-AC-SHD-US UniFi AP, AC SHD • 800 Mbps @ 2.4GHz, 1700 Mbps @ 5GHz
	UBNT-PBE-5AC-GEN2 5 GHz PowerBeam AC, Gen2 • 25 dBi, 450+ Mbps, 25+ km		UBNT-UB-AM Universal Antenna Mount	UniFi® ROUTING SWITCHING			
NanoStation		Accessories					
	UBNT-LOCOM2-US 2.4 GHz NanoStation LocoM2 • 8.5 dBi, 150+ Mbps, 5+ km		UBNT-N-SW NanoSwitch • Outdoor 4-port Gigabit switch with PoE Passthrough	UBNT-USG Gateway Router • 3 Gigabit Ethernet Ports			
	UBNT-LOCOM5-US 5 GHz NanoStation LocoM5 • 13 dBi, 150+ Mbps, 10+ km					UBNT-POE-24-12W-G PoE Injector • 0.5A @ 24V DC	
	UBNT-NSM2 2.4 GHz Nanostation M2 • 11 dBi, 150+ Mbps, 13+ km		UBNT-ETH-SP-G2 Ethernet Surge Protector, Gen 2	UBNT-USG-PRO-4-US Enterprise Gateway Router • 2 Gigabit Ethernet Ports			
	UBNT-NSM5 5 GHz Nanostation M5 • 14.6-16.1 dBi, 150+ Mbps, 15+ km		UBNT-ACB-ISP airCube ISP Home Wi-Fi AP			UBNT-POE-24-24W-G / UBNT-POE-48-24W-G PoE Injector • 1.0A @ 24V DC / 0.5A @ 48V DC	
	UBNT-NS-5AC-US 5 GHz NanoStation AC • 16 dBi, 450+ Mbps, 15+ km		UBNT-ACB-AC airCube AC Home Wi-Fi AP	UBNT-US-8 8 Port Managed Switch • 8 Gigabit Ethernet Ports			
	UBNT-NS-WM Wall Mount Kit Used for NanoStation					UBNT-US-8-150W-US 8 Port Managed Switch-4 PoE • 8 Gigabit PoE Ports	
UniFi® WIRELESS				UBNT-US-8-60W 8 Port Managed Switch-4 PoE • 8 Gigabit Ethernet Ports			
	UBNT-UMA-D-US Directional Dual-Band Antenna • Beamwidth -2.4GHz 90°, 5GHz 45°		UBNT-UAP-AC-IW UniFi AP, AC In-Wall • 300 Mbps @ 2.4GHz, 867 Mbps @ 5GHz			UBNT-US-16-150W 16 Port Managed PoE Switch • 16 Gigabit PoE Ports	
	UBNT-UAP-AC-M-PRO-US UniFi AP, AC MESH PRO • 802.3af PoE • Built-in Antenna		UBNT-UCK-G2-PLUS UniFi Cloud Key Plus • 802.3af PoE; Quick Charge 2.0 / 3.0 Power Adapter (9V DC, 2A)	UBNT-US-24 24 Port Managed Switch • 24 Gigabit Ethernet Ports			
						UBNT-US-24-250W 24 Port Managed PoE Switch • 24 Gigabit PoE Ports	

EdgeMAX® ROUTING SWITCHING			Unmanaged PoE Switches			IDEAL Tools and Connectors		
	UBNT-ER-X-US EdgeRouter X	• 5 Gigabit Ethernet Ports • Passive PoE Passthrough Option • 256 MB RAM System Memory • 256 MB On-Board Flash Storage • Powered via 12V DC, 0.5A Power Adapter or 24V Passive PoE • 5W		POE-SW401EG 4 Port Gigabit PoE Switch	• 60W, 802.3af/at • 4 Gigabit PoE Ports • 1 Gigabit RJ45 Port		IDEAL-85-372E IDEAL-85-377E	CAT5e / CAT6 Feed-Thru Modular Plugs
	UBNT-ER-X-SFP-US EdgeRouter X SFP	• 5 Gigabit Ethernet Ports • Passive 24V PoE Output, 50W • 1 SFP Port • 256 MB RAM System Memory • 256 MB On-Board Flash Storage • 5W		POE-SW801EG 8 Port Gigabit PoE Switch	• 110W, 802.3af/at • 8 Gigabit PoE Ports • 1 Gigabit RJ45 Port • 1 Gigabit Fiber Optical Port		IDEAL-30-495	FT-45™ Feed-Thru Modular Plug Crimp Tool Crimps Feed-Thru, Standard and Shielded
	UBNT-ER-12 EdgeRouter 12	• 10 Gigabit Ethernet Ports • 2 SFP Ports • 1 RJ45 Serial Port • 1 GB DDR3 RAM System Memory • 4 GB On-Board Flash Storage • 20W		POE-SW1602EG 16 Port Gigabit PoE Switch	• 225W, 802.3af/at/bt • 16 Gigabit PoE Ports • 2 Gigabit RJ45 Ports • 2 Gigabit Fiber Optical Ports		IDEAL-35-088	Snips with Stripping Notch
	UBNT-ES-24-LITE 24 Port Managed Switch	• 24 Gigabit Ethernet Ports • 2 SFP Ports • 1 Serial Console Port • 25W, Rack-Mountable		POE-SW2402EG 24 Port Gigabit PoE Switch	• 370W, 802.3af/at/bt • 24 Gigabit PoE Ports • 2 Gigabit RJ45 Ports • 2 Gigabit Fiber Optical Ports		IDEAL-45-074	Data T®-Cutter
	UBNT-ES-5XP 5 Port Managed PoE Switch XP	• 5 Gigabit PoE Ports • 1 10/100 Ethernet Management Port • 60W • Support 24V Passive PoE		POE-SW401S 4 Port PoE Switch with 1 Port Uplink	• 60W, 802.3af/at • 10/100 Mbps, up to 820 ft • Network Topology Management, Alarm Push, Network Health Monitor		IDEAL-89-1047E	InSITE™ RG-59 BNC Compression Connectors Window Ensures Proper Cable Insertion
	UBNT-ES-16-150W 16 Port Managed PoE Switch	• 16 Gigabit PoE Ports • 2 SFP Ports • 1 Serial Console Port • 150W, Rack-Mountable • Supports POE+ IEEE 802.3at/af and 24V Passive PoE		LTPE1610 LTPE1625 LTPE1650 LTPE16100	• 10/25/50/100 ft, 16/3C SJTW Extension Cord • Orange Single Outlet, UL Listed		IDEAL-30-793	OmniSeal™ PRO XL Compression Tool
	UBNT-ES-24-250W 24 Port Managed PoE Switch	• 24 Gigabit PoE Ports • 2 SFP Ports • 1 Serial Console Port • 250W, Rack-Mountable • Supports POE+ IEEE 802.3at/af and 24V Passive PoE		LTPE1225-L3 LTPE1250-L3 LTPE12100-L3	• 25/50/100 ft, 12/3C SJTW Extension Cord • Yellow 6 ft Cord, Triple Outlet Lighted when Power is On, UL Listed		IDEAL-33-632	LinearX®@3 Compression Tool
Injectors 				LTPE1420-3	• 20 ft 14/3C Indoor Extension Cord • Orange Cord, Triple Outlet with Sliding Cover Feature, UL Listed		IDEAL-45-605	PrepPRO® Coax/UTP Cable Stripper
	POE-I100GF	Single Port Gigabit Injector • 15W, 802.3af/at • 10/100/1000 Mbps		LTPS0802 LTPS0806 LTPS0812	• 8 Outlet Power Strips • White, 2 / 6 / 12 ft Cord, UL Listed	Power Strips and Extension Cords		
	POE-I100GT	Single Port Gigabit Injector • 30W, 802.3af/at • 10/100/1000 Mbps		LTPS0606-M	• 6 Outlet Metal Case Outlet Strips • Yellow, 6 ft Cord, ETL Listed			
				LTPS0806-A	• 8 Way Aluminum Alloy Case Power Bar • 6 ft Cord, ETL Listed			
				LTPS1215-A	• 12 Way Aluminum Alloy Case Power Bar • 15 ft Cord, ETL Listed			

Power Adapters			Power Supplies				Warning Signs			
PS120V0800	• 800mA, 12V DC		12V DC		Rating			LTSIGNB	• 9"(W) x 11"(H)	
PS120V1000	• 1000mA, 12V DC		PS120V5-D	• 4 Port • 5 Amp	PTC			LTSIGNA	• 11"(W) x 18"(H)	
PS120V2000	• 2000mA, 12V DC		DV-AT1207M-D09	• 9 Port • 7 Amp	PTC					
PS120V3000	• 3000mA, 12V DC		DV-AT1209A-D9P	• 9 Port • 9 Amp	PTC			LTSACS-801	• Solar Power (No Battery Needed) • Actively Flashing LCD	
TS5-6W	• 5000mA, 12V DC		DV-AT1212A-D18P	• 18 Port • 12 Amp	PTC					
PS240V1000	• 1000mA, 24V AC		DV-AT1220A-D18P	• 18 Port • 20 Amp	PTC					
PS240V3000	• 3000mA, 24V AC		DV-RT1224A-D24	• 24 Port • 24 Amp	PTC		Monitor Brackets			
DV-AT12015-D01	• 1500mA (Max), 24V AC to 12V DC		DV-RT1232A-D32	• 32 Port • 32 Amp	PTC			LTMB1026	• For 10" - 26" Screen Size • Distance to Wall 35 - 390 mm • Max Loading Weight 10kg	
Passive Video Balun Tranceivers			DV-AT1205A-D07	• 4 Port • 5 Amp	PTC			LTMB1737	• For 17" - 37" Screen Size • Distance to Wall 35 - 380 mm • Max Loading Weight 30kg	
	• 8 MP/4K Passive HD Video Balun • Compatible with HD-TVI / CVI / AHD / CVBS Cameras • Support 720p / 960p / 1080p / 3 MP / 5 MP / 8 MP		DV-AT1209A-D9	• 9 Port • 9 Amp	Fuse					
			DV-AT1212A-D18	• 18 Port • 12 Amp	Fuse					
LTAB4020NT			DV-AT1210A-D07	 • 9 Port • 10 Amp	Fuse			LTMB2655	• For 26" - 55" Screen Size • Distance to Wall 7 mm • Max Loading Weight 50kg	
			DV-AT1210A-D10	 • 18 Port • 10 Amp	Fuse					
			DV-AT1215A-D10	 • 18 Port • 18 Amp	Fuse					
DVR Lockboxes			DV-AT1232A-D18	• 18 Port • 32 Amp	Fuse			LTMB3270	• For 32" - 70" Screen Size • Distance to Wall 70 - 390 mm • Max Loading Weight 75kg	
	LT-DVRLB18-18-5		DV-AT1232A-D27	• 27 Port • 32 Amp	Fuse					
	LT-DVRLB21-21-8		24V AC		Rating					
	LT-DVRLB21-24-8		DV-AC2408A-D07	• 9 Port • 8 Amp	PTC					
	LTBHWB (Wall Mount Bracket)		DV-AC2412A-D10	• 18 Port • 12 Amp	PTC					

Connectors		
	LTA1001	BNC Twist-On RG59 Male (20 pcs/pack)
	LTA1002	BNC Male to RCA Female (20 pcs/pack)
	LTA1003	BNC Female to RCA Male (20 pcs/pack)
	LTA1004	BNC Male to RCA Male (20 pcs/pack)
	LTA1005	BNC Coupler Female to Female (20 pcs/pack)
	LTA1006	BNC Compression for RG59 (20 pcs/pack)
	LTA1007	BNC Male Crimp-on (20 pcs/pack)
	LTA1013	BNC Male to 2 BNC Female (20 pcs/pack)
	LTA1014	X RJ45 8P8C Cat5e Crimp Connector
	LTA1016	X RJ45 8P8C Cat6 Crimp Connector
	LT-KY5E110	Enhanced Cat5e Keystone Jack
CAT5e Pre-Made Cables		
	LTAC2042 LTAC2041	• Pre-made RJ45 CAT5e Cable • LTAC2042 - 50 ft • LTAC2041 - 100 ft
Tools		
	LTA-T203MS	• Wire Stripper • Strip Wire (12 - 22 gauge) with One Pull of Trigger • Built-in Ruler Splicer with Auto Adjust

Control Cables		
	 LTAC1802G-CMR	• 18AWG / 2 Conductor Access Control Wire • 1000 ft Stranded • 99.99% OFC • Access Control, Intercom, and Alarm • CMR Rated, UL Listed • Color: Gray
	 LTAC1806G-CMR	• 18AWG / 6 Conductor Control Wire • 500 ft Stranded • 99.99% OFC • CMR Rated • Shielded ETL • Color: Gray
	 LTAC1822Y-CMR	• 500 ft Stranded Control Cable • 99.99% OFC • 18/4 + 22/2 + 22/4 + 22/6 Combination Cable • Shielded 22/6 • ETL Rated, CMR Rated • Color: Yellow
Cables (HDMI, DC Power, X RJ45)		
	LTAC3005 LTAC3110 LTAC3125 LTAC3150	• HDMI with Ethernet • 4.5 / 10 / 25 / 50 ft Cable • Hi-Speed 1080p / 3D, 100% Triple Shield 24K • Gold Plated with Nylon Jacket
	LTA2003	• Terminal Connector • 9 Terminal, DC & AC • Connector / Splitter
	LTAC3100	• 100 ft HDMI Cable • Hi-Speed 1080p with USB Booster 26AWG
	LTA2017 LTA2013	• DC Power Connector • LTA2017 - Male • LTA2013 - Female (20 pcs/pack)
	LTA2004 LTA2014	• DC Power Adapter Cable • LTA2004 - Male • LTA2014 - Female (20 pcs/pack)
	LTA2010 LTA2008	• Male / Female Pigtail • LTA2010 - Male • LTA2008 - Female

Cables (Coaxial, CAT5e and CAT6 Network)

	LTAC5100W-CMR LTAC5100BL-CMR LTAC5100B-CMR		• 1000 ft CAT5e 99.99% OFC • UL Listed, RoHS Compliant • ISO / IEC11801, ANSI / TIA-568B-C.2 • Fluke Tested • CMR Rated • Color: White / Blue / Black	
	LTAC6250W-CMR LTAC6250BL-CMR LTAC6250B-CMR		• 1000 ft CAT6 99.99% OFC • UL Listed, RoHS Compliant • ISO / IEC11801, ANSI / TIA-568B-C.2 • Fluke Tested • CMR Rated • Color: White / Blue / Black	
	LTAC5100B-CMX LTAC6250B-CMX		• 1000 ft CAT5e / CAT6 99.99% OFC • ETL Listed, RoHS Compliant • ISO / IEC11801, ANSI / TIA-568B-C.2 • Fluke Tested • Outdoor Rated, UV Resistance • Direct Burial • Color: Black	
	LTAC6250W-CMP LTAC6250BL-CMP LTAC6250B-CMP		• 1000 ft CAT6 99.99% OFC • UL Listed, RoHS Compliant • ISO / IEC11801, TIA-568-C.2 • Fluke Tested • Plenum Rated, CMP • Color: White / Blue / Black	
	LTAC2040 LTAC2046		• 1000 ft CCA CAT5e / CAT6 • Commercial Grade Network Cable • Color: White / Blue / Black	
	LTAC2031W / LTAC2031B LTAC2033W / LTAC2033B		• Siamese Coaxial Cable • White / Black Bare Wire • 500 ft / 1000 ft RG59, Coaxial 95%, Braided + 18/2 • 18AWG CCA Cable	
	LTAC2030 LTAC2032		• Siamese Coaxial Cable • White / Black Bare Wire • 500 ft / 1000 ft RG59, Coaxial 95%, Braided + 18/2 • Solid 100% 18AWG Oxygen Free Copper	
	LTAC2030B-CMX LTAC2032B-CMX		• Siamese Coaxial Cable • Color: Black • Direct Burial • 500 ft / 1000 ft RG59, Coaxial 95%, Braided + 18/2 • Solid 100% 18AWG Oxygen Free Copper	
	LTAC2060W / LTAC2060B LTAC2100W / LTAC2100B LTAC2150W / LTAC2150B		• Pre-made HD Siamese Cable with BNC and Power Connector • 60 ft / 100 ft / 150 ft • Color: White / Black	

Cables (DC Power, VGA, Microphone)

	LTA2005	• DC Power Splitter • 1 Female to 2 Male	
	LTA2006	• DC Power Splitter • 1 Male to 2 Female	
	LTA2011	• DC Power Splitter • 1 Female to 4 Male	
	LTA2018	• DC Power Splitter • 1 Female to 8 Male	
	LTA2001	• 12" Microphone with Power Cable • Microphone with Amplifier	

Converters, Splitters, Extenders

	LTAH2100E	• USB RJ45 Extender • 2 x USB, USB A Female • Plug & Play • Cable Type: CAT5, 5E, 6, UTP • Extend Distance to 150 ft	
	LTAH014LN	• 1 in / 4 out HDMI Splitter • Support HDMI 1.3 and 1080p • HDCP & 3D Support	
	LTAH018L	• 1 in / 8 out HDMI Splitter • 8 Identical HDMI Outputs • Up to 225MHz • Support 3D	
	LTAH3100E	• VGA / Audio X RJ45 Extender • Video Type: VGA • Supports 1920 x 1440 • 1 x Stereo Audio (R/L) • Extend Distance to 900 ft	
	LTAH1070E	• HDMI Extender 1080p • Supports 1080p up to 165 ft • 5V DC/1A, Power Adapter included	
	LTAH5300T	• HD-TVI Distributor • Input: 1 x HD-TVI • Output: 3 x HD-TVI	



WD PURPLE™ PRO HDD

Make Your Smart Video Smarter

Pro Performance for Advanced Analytics

- WD Purple™ Pro HDD, with OptiNAND™ technology in 22 TB, delivers massive capacity in a drive engineered for advanced, AI-enabled, always-on smart video recorders, appliances, and servers.
- Exclusive AllFrame™ AI technology improves ATA streaming to help reduce frame loss and improve overall video playback.
- Optimized to handle up to 64 single-stream HD cameras as well as many of the latest smart cameras that transmit multiple streams.
- With a workload rating up to 550 TB/year, these drives are built to keep up with heavy video data capture and analysis.
- Engineered with an MTBF of up to 2.5 million hours for advanced smart video solutions that operate in 24/7 environments.
- Western Digital Device Analytics™ provides a wealth of storage device parametric operational and diagnostic data to compatible systems.

Capacity	8 TB, 10 TB, 12 TB, 14 TB, 18 TB, 22 TB
Interface	SATA 6 Gb/s
Form Factor	3.5 inch
MTBF	Up to 2.5 million hours
Warranty	5 years





Video Solutions for Security Professionals

Arizona - Phoenix

2850 S. 36th St., Suite A-7
Phoenix, AZ 85034
Toll Free: 877-284-2890
Tel: 602-903-2220
Email: Support.AZ@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (MST): MON - FRI
En LTS Arizona hablamos español

Florida

1609 NW 84th Ave
Doral, FL 33126
Tel: 786-693-1813
Fax: 786-631-3639
Email: Support.Florida@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
En LTS Florida hablamos español

Maryland - Beltsville

7001 Muirkirk Meadows Dr., Suite A
Beltsville, MD 20705
Tel: 240-493-8988
Email: Support.Maryland@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
En LTS Maryland hablamos español

Texas - Dallas

1100 Valwood Pkwy., Suite 112
Carrollton, TX 75006
Tel: 469-289-5780
Email: Support.Dallas@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (CST): MON - FRI
En LTS Dallas hablamos español

Texas - Houston

8634 Westpark Dr.
Houston, TX 77063
Tel: 713-587-1800
Email: Support.Houston@LTSecurityinc.com
Sales Office: 8:30am - 6pm (CST): MON - FRI
En LTS Houston hablamos español

California - Los Angeles

17333 Freedom Way
City of Industry, CA 91748
Toll Free: 888-587-5871
Tel: 626-435-2838
Email: Contact.LosAngeles@LTSecurityinc.com
Sales Office: 8:30am - 6pm (PST): MON - FRI
En LTS California hablamos español

Georgia - Norcross

5933 Peachtree Industrial Blvd., Suite B
Norcross, GA 30092
Tel: 678-710-3788
Email: Support.GA@LTSecurityinc.com
Sales Office: 9am - 6pm (EST): MON - FRI

New Jersey - Mount Laurel

109 West Park Dr., Suite B & C
Mount Laurel, NJ 08054
Toll Free: 855-835-8889
Tel: 856-780-9888
Email: Support.NewJersey@LTSecurityinc.com
Sales Office: 8:30am - 6pm (EST): MON - FRI



Visit LTSecurityinc.com

California - San Francisco

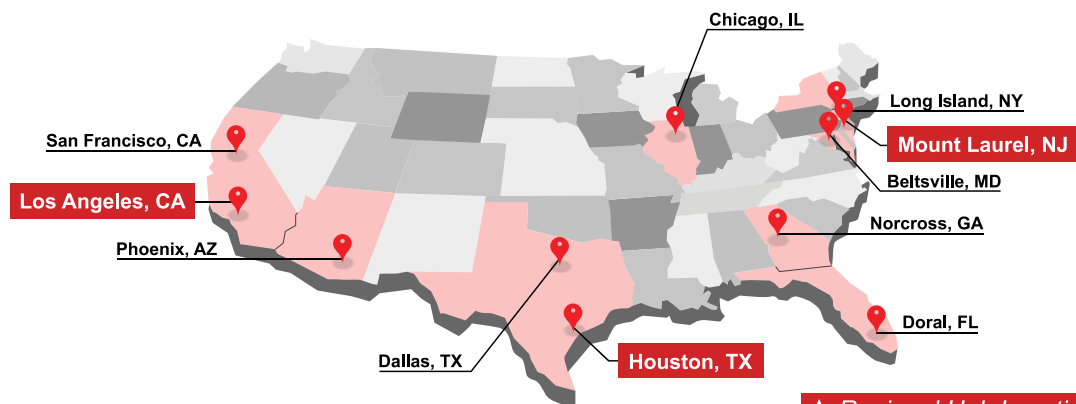
38507 Cherry St., Suite G
Newark, CA 94560
Toll Free: 888-216-2812
Tel: 510-201-9868
Email: Support.SanFrancisco@LTSecurityinc.com
Sales Office: 9am - 6pm (PST): MON - FRI

Illinois - Chicago

1951 Landmeier Rd.
Elk Grove Village, IL 60007
Tel: 630-348-8088
Email: Support.Chicago@LTSecurityinc.com
Sales Office: 9am - 6pm (CST): MON - FRI
En LTS Illinois hablamos español

New York - Long Island

99 Seaview Blvd., Suite 1B
Port Washington, NY 11050
Toll Free: 888-517-3102
Tel: 646-558-3888
Email: Support.NewYork@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
After-hour Pickup Available



★ *Regional Hub Location*