



Video Solutions for Security Professionals



Product Catalog



Q1/Q2 2021

Platinum NVRs	ii	Platinum HD-TVI Cameras	P16	Intercom	P30
Platinum IP Cameras	P4	Pro-VS Products	P21	Access Control	P32
Platinum IP PTZ Cameras	P12	Sapphire Products	P23	Wireless Solutions	P36
Platinum HD-TVI DVRs	P14	Temperature Screening Solutions	P29	Accessories	P40

LTS reserves the right to modify, add or remove sale items. Prices & product specifications may change without prior notice. LTS is not responsible for typographical errors. Images may be used for illustration purpose only and do not represent actual products. Tax not included. All prices effective on January 1, 2021 LTS offers a 3-year warranty on Platinum products unless otherwise specified. © 2021 LTS.


5 Reasons to Choose a Stand-Alone NVR

- Plug-n-Play Installation Automatic IP Configuration
- No Added License Fees
- H.265 Encoding for Maximizing Storage
- Remote Mobile Management
- Embedded Linux System Stable, High-Performance

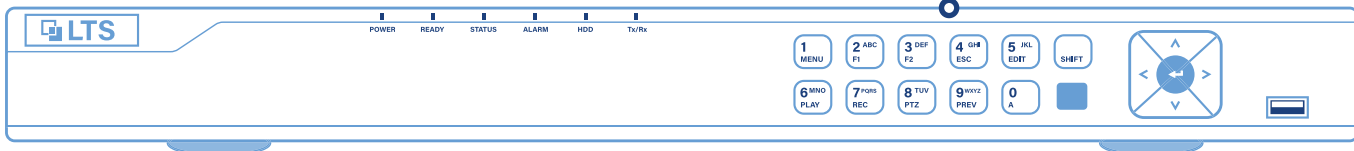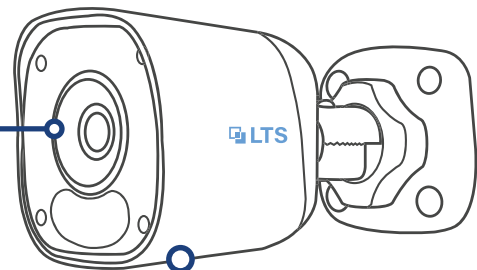


SKU	LTN8704Q-P4	LTN8708Q-P8	LTN8708K-P8	LTN8608-P8	LTN8716K-P16	LTN8616-P16
Series	Professional Level	Professional Level	Professional Level	Professional Level	Professional Level	Professional Level
Video Input	4CH IP@40Mbps	8CH IP@80Mbps	8CH IP@80Mbps	8CH IP@80Mbps	16CH IP@160Mbps	16CH IP@160Mbps
Recording	2MP	4CH@30fps/CH	8CH@30fps/CH	8CH@30fps/CH	16CH@30fps/CH	16CH@30fps/CH
	4MP	4CH@20fps/CH	8CH@20fps/CH	8CH@20fps/CH	16CH@20fps/CH	16CH@20fps/CH
	8MP	4CH@15fps/CH	8CH@15fps/CH	8CH@15fps/CH	16CH@15fps/CH	16CH@15fps/CH
Video Output	HDMI up to 4K(3840x2160) / VGA up to 1080P		HDMI up to 4K(3840x2160), VGA up to 1080P	HDMI up to 4K(3840x2160), VGA up to 1080P, CVBS	HDMI up to 4K(3840x2160), VGA up to 1080P	HDMI up to 4K(3840x2160), VGA up to 1080P, CVBS
Max. Recording Resolution	Up to 4K, 8MP(3840x2160)	Up to 4K, 8MP(3840x2160)	Up to 4K, 8MP(3840x2160)	Up to 12 MP(4000x3072)	Up to 4K, 8MP(3840x2160)	Up to 12MP(4000x3072)
Decoding Format	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+
Decoding Capability	1CH@4K / 4CH@1080P	1CH@4K / 4CH@1080P	2CH@4K / 8CH@1080P	2CH@4K / 8CH@1080P	2CH@4K / 8CH@1080P	4CH@4K / 16CH@1080P
Max. Playback Resolution	Up to 4K, 8MP(3840x2160)	Up to 4K, 8MP(3840x2160)	Up to 4K, 8MP(3840x2160)	Up to 12MP(4000x3072)	Up to 4K, 8MP(3840x2160)	Up to 12MP(4000x3072)
Audio In/Out	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	-	-	4/1	4/1	4/1	4/1
Built-in PoE	4CH	8CH	8CH	8CH	16CH	16CH
Network	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45
Storage	1 SATA up to 6TB, NAS, IP SAN	2 SATA up to 12TB, NAS, IP SAN	2 SATA up to 12TB, NAS, IP SAN	2 SATA up to 16TB, NAS, IP SAN	2 SATA up to 12TB, NAS, IP SAN	2 SATA up to 16TB, NAS, IP SAN
Support Fisheye#	-	-	-	6	-	6
Support POS#	-	-	-	4 (TCP)	-	8 (TCP)
Backup	2 USB 2.0	2 USB 2.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0
Dimensions	12.4"(W)x9.1"(D)x1.8"(H)	15"(W)x12.4"(D)x1.8"(H)	15"(W)x12.4"(D)x1.8"(H)	15"(W)x12.4"(D)x1.8"(H)	15"(W)x12.4"(D)x1.8"(H)	15"(W)x12.4"(D)x1.8"(H)

Long-Distance Built-in PoE

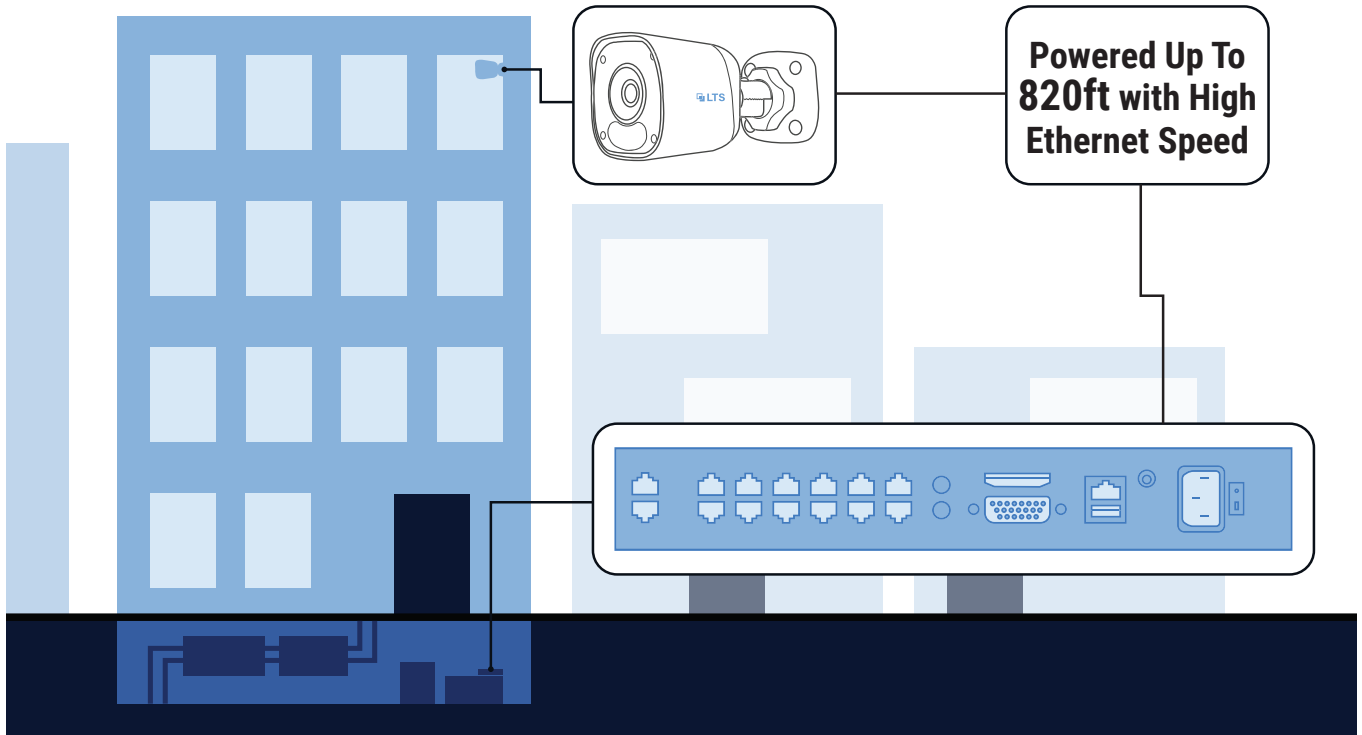

SKU	LTN8916H	LTN8916H-P16	LTN8932H	LTN8932H-P16	LTN8932H-P24
Series	Enterprise Level	Enterprise Level	Enterprise Level	Enterprise Level	
Video Input	16CH IP@160Mbps	16CH IP@160Mbps	32CH IP@256Mbps	32CH IP@256Mbps	
Recording	2MP	16CH@30fps/CH	16CH@30fps/CH	32CH@30fps/CH	32CH@30fps/CH
	4MP	16CH@30fps/CH	16CH@30fps/CH	32CH@30fps/CH	32CH@30fps/CH
	8MP	16CH@20fps/CH	16CH@20fps/CH	32CH@20fps/CH	32CH@20fps/CH
Video Output	HDMI1 up to 4K(3840x2160), HDMI2/VGA up to 1920x1080P, CVBS up to 704x480		HDMI1 up to 4K(3840x2160), HDMI2/VGA up to 1920x1080P, CVBS up to 704x480		
Max. Recording Resolution	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)	
Decoding Format	H.265/H.265+/H.264/H.264+		H.265/H.265+/H.264/H.264+		
Decoding Capability	4CH@4K / 16CH@1080P		4CH@4K / 16CH@1080P		
Max. Playback Resolution	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)	
Audio In/Out	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	
Alarm In/Out	16/4	16/4	16/4	16/4	
Built-in PoE	-	16CH	-	16CH	24CH
Network	10/100/1000M, 2 RJ45		10/100/1000M, 1 RJ45		
Storage	4 SATA up to 32TB, eSATA, NAS, IP SAN		4 SATA up to 32TB, eSATA, NAS, IP SAN		
Support Fisheye Camera#	8	8	8	8	
Support POS#	8 (TCP or RS232)		16 (TCP or RS232)		
Backup	2 USB 2.0, 1 USB 3.0, eSATA, DVD-RW		2 USB 2.0, 1 USB 3.0, eSATA, DVD-RW		
Dimensions	17.5"(W)x15.3"(D)x2.8"(H)		17.5"(W)x15.3"(D)x2.8"(H)		

Configure IP Cameras Through NVR Interface

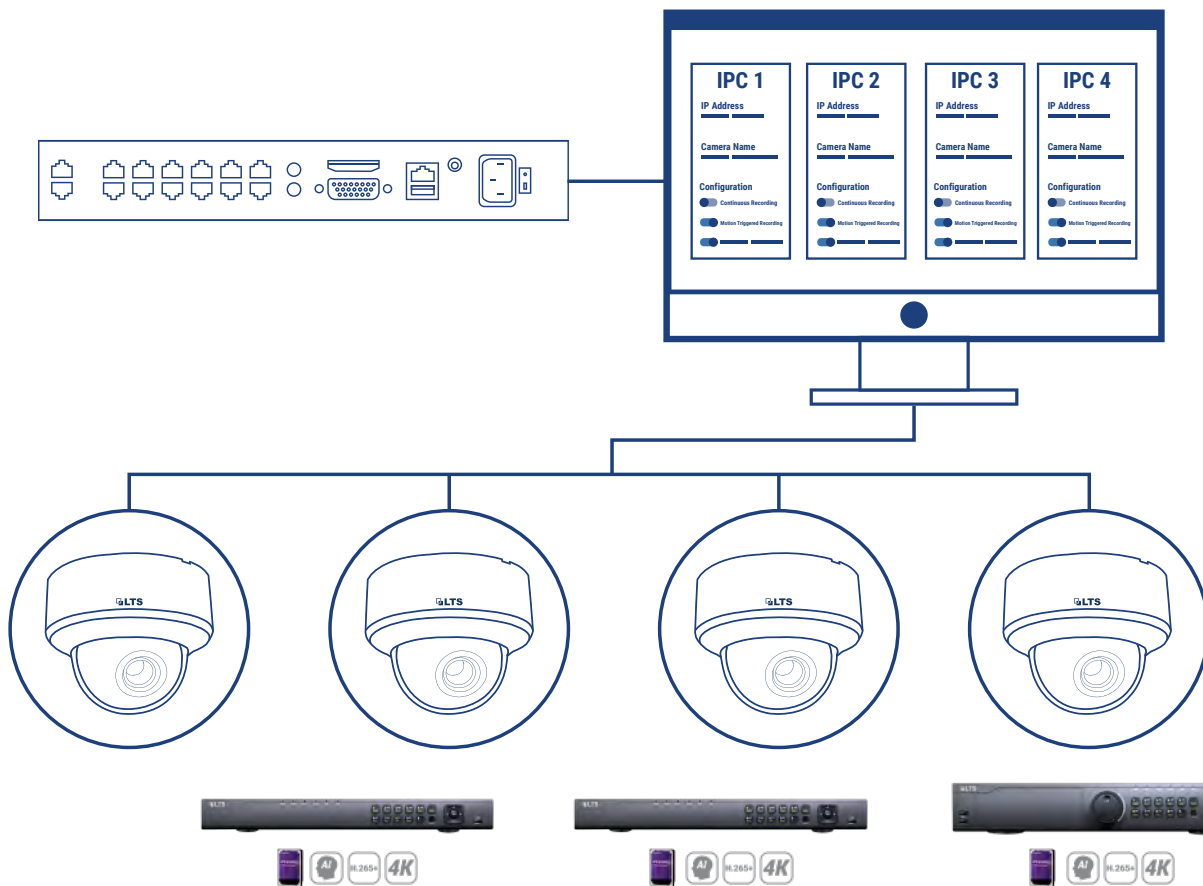

SKU	LTN8608D-P8	LTN8616D-P16	LTN8932D-P16
Series	Enterprise Level	Enterprise Level	Enterprise Level
Video Input	8CH IP@80Mbps	16CH IP@160Mbps	32CH IP@256Mbps
Recording	2MP	8CH@30fps/CH	16CH@30fps/CH
	4MP	8CH@30fps/CH	16CH@30fps/CH
	8MP	8CH@20fps/CH	16CH@20fps/CH
Video Output	HDMI up to 4K(3840x2160), VGA up to 1920x1080P, CVBS	HDMI up to 4K(3840x2160), VGA up to 1920x1080P, CVBS	HDMI1 up to 4K(3840x2160), HDMI2/VGA up to 1920x1080P, CVBS
Max. Recording Resolution	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)
Decoding Format	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+
Decoding Capability	3CH@4K / 12CH@1080P	3CH@4K / 12CH@1080P	3CH@4K / 12CH@1080P
Max. Playback Resolution	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)
Deep Learning Support	4CH Human/Vehicle DetectWhen tion	4CH Human/Vehicle Detection	4CH Human/Vehicle Detection
Audio In/Out	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	4/1	4/1	16/4
Built-in PoE	8CH	16CH	16CH
Network	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45
Storage	2 SATA up to 16TB, NAS, IP SAN	2 SATA up to 16TB, NAS, IP SAN	4 SATA up to 32TB, eSATA, NAS, IP SAN
Support Fisheye Camera#	6	6	8
Support POS#	4 (TCP)	8 (TCP)	16 (TCP or RS232)
Backup	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	2 USB 2.0, 1 USB 3.0, eSATA
Dimensions	15"(W)x12.4"(D)x1.8"(H)	15"(W)x12.4"(D)x1.8"(H)	17.5"(W)x15.3"(D)x2.8"(H)



SKU	LTN8964-R	LTN8964-R	LTN07128-R16	LTN07256-R16
Series	Enterprise Level	Enterprise Level	Enterprise Level	Enterprise Level
Video Input	64CH IP@320Mbps	64CH IP@320Mbps	128CH IP@768Mbps	256CH IP@768Mbps
Recording	2MP	64CH@30fps/CH	128CH@30fps	256CH@15fps
	4MP	64CH@20fps/CH	128CH@20fps	256CH@10fps
	8MP	64CH@15fps/CH	128CH@12fps	256CH@6fps
Video Output	HDMI1 up to 4K(3840x2160) / VGA1 up to 2K(2560x1440), HDMI2/VGA2 up to 1080P		HDMI1 up to 4K / VGA up to 1080P, HDMI2 up to 4K(4096x2160)	HDMI1 up to 4K / VGA 1080P, HDMI2 up to 4K, 6 HDMI TV Wall Built-in 7" Touch Screen
Max. Recording Resolution	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)
Decoding Format	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+
Decoding Capability	4CH@4K / 16CH@1080P	4CH@4K / 16CH@1080P	5CH@4K / 20CH@1080P	5CH@4K / 20CH@1080P
Max. Playback Resolution	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)	Up to 12MP(4000x3072)
Audio In/Out	1CH/2CH, RCA	1CH/2CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	16CH/4CH	16CH/4CH	48CH/24CH	48CH/24CH
Network	10/100/1000M, 2 RJ45	10/100/1000M, 2 RJ45	1000M, 4 RJ45, 4 Fiber Optic	1000M, 4 RJ45, 4 Fiber Optic
Storage	8 SATA up to 80TB, eSATA, NAS, IP SAN, RAID 0/1/5/6/10		16 SATA up to 160TB, NAS, IP SAN, RAID 0/1/5/6/10	
Support Fisheye#	8	8	16	16
Support POS#	16(TCP or RS232)	16(TCP or RS232)	16(TCP)	16(TCP)
Hot Swap HDD	-	Yes	Yes	Yes
Backup	3 USB 2.0, 1 USB 3.0, eSATA	3 USB 2.0, 1 USB 3.0, eSATA	2 USB 2.0, 2 USB 3.0	2 USB 2.0, 2 USB 3.0
Dimensions	17.5"(W)x18.5"(D)x3.5"(H)	17.5"(W)x18.5"(D)x3.5"(H)	17.5" (W)x19.4"(D)x 5.7"(H)	17.5" (W)x19.4"(D)x 5.7"(H)



SKU	LTN8704K-HT	LTN8708K-HT	LTN8716K-HT
Series	Hybrid	Hybrid	Hybrid
Analog Video Input	4CH up to 5MP HD-TVI4.0/AHD/CVI/960H	8CH up to 4K/8MP HD-TVI4.0/AHD/CVI/960H	16CH up to 4K/8MP HD-TVI4.0/AHD/CVI/960H
IPC Input	4CH up to 8MP(3072x2048)	8CH up to 8MP(3072x2048)	16CH up to 8MP(3072x2048)
Bandwidth	96Mbps	128Mbps	128Mbps
Video Output	VGA/HDMI up to 1080P, CVBS	HDMI up to 4K(3820x2160) / VGA up to 1080P, CVBS	HDMI up to 4K(3820x2160) / VGA up to 1080P, CVBS
Max. Recording Resolution	Up to 4K, 8MP(3840x2160)	Up to 4K, 8MP(3840x2160)	Up to 4K, 8MP(3840x2160)
Decoding Format	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+
Max. Playback Resolution	Up to 4K, 8MP(3840x2160)	Up to 4K, 8MP(3840x2160)	Up to 4K, 8MP(3840x2160)
Audio In/Out	4CH/1CH, RCA	4CH/1CH, RCA	4CH/1CH, RCA
Alarm In/Out	4CH/1CH	8CH/4CH	16CH/4CH
Network	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45
Storage	1 SATA up to 8TB, NAS, IP SAN	2 SATA up to 16TB, NAS, IP SAN	2 SATA up to 16TB, NAS, IP SAN
Support POS#	-	-	4 (TCP)
Backup	2 USB 2.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0
Dimensions	12.4"(W)x9.1"(D)x1.8"(H)	15"(W)x12.4"(D)x1.8"(H)	15"(W)x12.4"(D)x1.8"(H)

Western Digital Digital Device Analytics

Proactive
Management of
Storage Devices

Supported by
LTS NVRs



COLOR247



Traditional IR Camera

Color247 Camera



Full-Color Surveillance in the Dark



SKU	CMIP3C42W-28M CMIP3C42W-M CMIP3C42W-6M	CMIP3C42WB-28M CMIP3C42WB-M	CMIP7C42W-28S NEW	CMIP8C42W-28M	CMIP9C42NW-M (Junction Box Included)	CMIP8C82W-28MA NEW	CMIP9C82W-28M NEW (Junction Box Included)
Resolution	4MP, 2560x1440@24fps		4MP, 2688x1520@30fps	4MP, 2560x1440@24fps	4MP, 2688x1520@30fps	4K/8MP, 3840x2160@20fps	
Fixed Lens	2.8mm 4mm 6mm	2.8mm 4mm	2.8mm	2.8mm	4mm	2.8mm	2.8mm
Lux	0.0014 Lux @ F1.0 Ultra Low Lux		0.0005 Lux @ F1.0 Ultra Low Lux	0.0014 Lux @ F1.0 Ultra Low Lux	0.0014 Lux @ F1.0 Ultra Low Lux	0.0005 Lux @ F1.0 Ultra Low Lux	0.0005 Lux @ F1.0 Ultra Low Lux
Compression	H.265/H.265+		H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+
Image Sensor	1/1.8" Progressive Scan CMOS		1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.2" Progressive Scan CMOS	1/1.2" Progressive Scan CMOS
Features	True WDR 120dB		True WDR 130dB	True WDR 120dB	True WDR 120dB	True WDR 130dB	True WDR 130dB
Audio In/Out	-	-	Built-in Microphone Audio In/Out	-	-	Built-in Microphone	-
Alarm In/Out	-	-	Alarm In/Out	-	-	-	-
Storage	MicroSD Card Slot up to 128GB	MicroSD Card Slot up to 128GB	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 128GB	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 256GB
Rating	IP67		IP67	IP67	IP67	IP67	IP67
Power	DC 12V, PoE		DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE

Accessories for CMIP3CXX, 8CXX

LTB701	LTB701B	LTB801	LTB342-140	LTB342-140B
Junction Box for CMIP3CXX (White)	Junction Box for CMIP3CXX (Black)	Junction Box for CMIP8CXX	Wall Mount for CMIP3CXX	Wall Mount with Junction Box for CMIP3CXX

Dome Fixed Lens



SKU	CMIP7042-28M NEW	CMIP7342W-28M CMIP7342WB-28M	CMIP7342W-M CMIP7342W-6M
Resolution	4MP, 2560x1440@20fps	4MP, 2688x1520@30fps	4MP, 2688x1520@30fps
Fixed Lens	2.8mm	2.8mm	4mm 6mm
Lux	0.028 Lux @ F2.0	0.018 Lux @ F1.6	0.018 Lux @ F1.6
Compression	H.265/H.265+	H.265/H.265+	H.265/H.265+
IR	IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft
Feature	DWDR, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC
Storage	MicroSD/SDHC/SDXC Slot up to 256GB (Supports Image and Logs Storage Only)	MicroSD/SDHC/SDXC Slot up to 128GB	MicroSD/SDHC/SDXC Slot up to 128GB
Axis	2 Axis	3 Axis	3 Axis
Rating	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE

Accessories for CMIP70XX, 73XX

LTB347/LTB347B	LTB349	LTB378
Junction Box (White/Black)	Angled Ceiling Mount (15°)	Pole Mount
LTB379	LTB348/LTB348B	LTB342-110
Corner Mount	Wall Mount (White/Black)	Wall Mount
LTB342-110B		LTB376
Wall Mount with Junction Box		Pendant Mount 22"(56cm)

CMIP7382W-28SH


- **8MP**, 3840x2160@20fps
- 2.8mm Fixed Lens
- 0.028 Lux @F2.0
- H.265/H.265+
- Matrix IR LED up to 100ft
- True WDR 120dB, 3D DNR, BLC
- **1080P HDMI Video Output**
- MicroSD Card Slot Up to 128GB, Auto Network Replenishment
- 3 Axis
- IK10 Vandal Proof
- DC12V, PoE


4K Public View Monitor Solution


SKU	CMIP7362W-28M	CMIP7362WB-28M	CMIP7362W-M	CMIP7082W-28MA NEW	CMIP7382NW-28M CMIP7382NW-M
Resolution	6MP , 3072x2048@20fps	6MP , 3072x2048@20fps	6MP , 3072x2048@20fps	8MP , 3840x2160@15fps	8MP , 3840x2160@15fps
Fixed Lens	2.8mm	2.8mm	4mm	2.8mm	2.8mm 4mm
Lux	0.028 Lux @ F2.0	0.028 Lux @ F2.0	0.028 Lux @ F2.0	0.01 Lux @ F2.0	0.028 Lux @ F2.0
Compression	H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+
IR	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft
Audio In/Out	-	-	-	Built-in Microphone	-
Feature	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC
Storage	MicroSD up to 128GB, Automatic Network Replenishment	MicroSD up to 128GB, Automatic Network Replenishment	MicroSD up to 128GB, Automatic Network Replenishment	MicroSD up to 128GB (Supports Image and Logs Storage Only)	MicroSD up to 128GB, Automatic Network Replenishment
Axis	3 Axis	3 Axis	3 Axis	2 Axis	3 Axis
Rating	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE

Accessories

LTB347	LTB347B	LTB347H	LTB349	LTB348/LTB348B	LTB342-110	LTB342-110B	LTB376	LTB378	LTB379
Junction Box (White/Black)	Junction Box (White/Black)	Junction Box for CMIP7382W-28SH	Angled Ceiling Mount (15°)	Wall Mount (White/Black)	Wall Mount	Wall Mount with Junction Box	Pendant Mount 22° (56cm)	Pole Mount	Corner Mount

Mini Dome Fixed Lens


SKU	CMIP3142NW-28S	CMIP3142NW-28SWIFI	CMIP3162NW-28S
Resolution	4MP , 2688x1520@30fps	4MP , 2688x1520@30fps	6MP , 3072x2048@20fps
Fixed Lens	2.8mm	2.8mm	2.8mm
Lux	0.018 Lux @ F1.6	0.018 Lux @ F1.6	0.028 lux @ F2.0
Compression	H.265/H.265+	H.265/H.265+	H.265/H.265+
IR	Matrix IR LED up to 33ft	Matrix IR LED up to 33ft	Matrix IR LED up to 33ft
Feature	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC
Audio In/Out	Built-in Microphone & Audio Out		
Alarm In/Out	Yes	Yes	Yes
Built-in Wi-Fi	-	Yes	-
Storage	MicroSD Card Slot up to 128GB, Automatic Network Replenishment		
Axis	3 Axis	3 Axis	3 Axis
Rating	IP66, IK8 Vandal Proof	IP66, IK8 Vandal Proof	IP66, IK8 Vandal Proof
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE

Accessories

LTB742-120		Wall Mount for CMIP31XX
LTB378		Pole Mount for CMIP31XX
LTB379		Corner Mount for CMIP31XX

Wi-Fi IP Camera

CMIP8942NW-28SWIFI
<ul style="list-style-type: none"> • 4MP, 2688x1520@30fps • 2.8mm Fixed Lens • 0.018 Lux @ F1.6 • H.265/H.265+ • Matrix IR LED up to 33ft • True WDR 120dB, 3D DNR, BLC • Built-in Mic and Speaker • Alarm In/Out • Built-in Wi-Fi • MicroSD Card Slot Up to 128GB, ANR • 3 Axis • DC 12V, PoE

Video Doorbell IP Camera

LTH-7132-WIFI
<ul style="list-style-type: none"> • 3MP, 2048x1536@30fps • 2.2mm Fixed Lens • 180° Panoramic View • Smart H.264 Compression • IR Up to 16ft • DWDR, 3D DNR • Built-in Mic and Speaker • Built-in Wi-Fi • MicroSD Card Slot Up to 128GB • IP65, AC 8V~AC 24V • Color Faceplates (White/Black/Coral)

PLATINUM IP CAMERA



Dome Vari-focal Lens



SKU	CMIP7043W-MZ	CMIP7243NW-SZ	CMIP7263NW-SZ	CMIP7283NW-SZ
Resolution	4MP , 2560x1440@20fps	4MP , 2688x1520@30fps	6MP , 3072x2048@20fps	8MP , 3840x2160@15fps
Vari-focal Lens	2.8 - 12mm VF Motorized Lens	2.8 - 12mm VF Motorized Lens	2.8 - 12mm VF Motorized Lens	2.8 - 12mm VF Motorized Lens
Lux	0.018Lux @ F1.6	0.018 Lux @ F1.6	0.018 Lux @ F1.6	0.018 Lux @ F1.6
Compression	H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+
IR	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft
Smart Focus	Motorized Lens with Smart Focus	Motorized Lens with Smart Focus	Motorized Lens with Smart Focus	Motorized Lens with Smart Focus
Feature	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC
Storage	MicroSD/SDHC/SDXC Card Slot up to 128GB (Supports Image and Logs Storage Only)	MicroSD/SDHC/SDXC Card Slot up to 128GB, Auto Network Replenishment	MicroSD/SDHC/SDXC Card Slot up to 128GB, Auto Network Replenishment	MicroSD/SDHC/SDXC Card Slot up to 128GB, Auto Network Replenishment
Axis	3 Axis	3 Axis	3 Axis	3 Axis
Audio	-	Audio In/Out	Audio In/Out	Audio In/Out
Alarm	-	Alarm In/Out	Alarm In/Out	Alarm In/Out
Rating	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE

Accessories for CMIP70XX

LTB701	LTB342-135	LTB342-135B	LTB381	LTB378	LTB379
Junction Box	Wall Mount	Wall Mount with Junction Box	Pendant Mount 22' (56cm)	Pole Mount	Corner Mount

Accessories for CMIP72XX, 78XX

LTB342-155	LTB781	LTB388	LTB389
Wall Mount	Pendant Mount 22' (56cm)	Pole Mount	Corner Mount

Turret Fixed Lens



SKU	CMIP1022-28M	CMIP1042-28M	CMIP3322W-28M CMIP3322W-M	CMIP3342W-28M CMIP3342WB-28M	CMIP3342W-M	CMIP3342W-28MA
Resolution	2MP , 1920x1080@30fps	4MP , 2560x1440@20fps	2MP , 1920x1080@30fps	4MP , 2688x1520@30fps	4MP , 2688x1520@30fps	4MP , 2688x1520@30fps
Fixed Lens	2.8mm	2.8mm	2.8mm 4mm	2.8mm	4mm	2.8mm
Lux	0.028 Lux @ F2.0	0.028 Lux @ F2.0	0.028 Lux @ F2.0	0.028 Lux @ F2.0	0.028 Lux @ F2.0	0.018 Lux @ F1.6
Compression	H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+
IR	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft
Audio In/Out	-	-	-	-	-	Built-in Microphone
Storage	MicroSD Card Slot up to 256GB (Supports Image and Logs Storage Only)	MicroSD Card Slot up to 256GB (Supports Image and Logs Storage Only)	MicroSD Card Slot up to 128GB, Auto Network Replenishment	MicroSD Card Slot up to 128GB, Auto Network Replenishment	MicroSD Card Slot up to 128GB, Auto Network Replenishment	MicroSD Card Slot up to 128GB, Auto Network Replenishment
Features	DWDR, 3D DNR, BLC	DWDR, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC
Rating	IP67	IP67	IP67	IP67	IP67	IP66
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE

Accessories

LTB03-W	LTB03-B	LTB307	LTB307B	LTB301	LTB371	LTB378	LTB379
Junction Box (White)	Junction Box (Black)	Junction Box (White)	Junction Box (Black)	Wall Mount	Pendant Mount 21.5' (55cm)	Pole Mount	Corner Mount



SKU	CMIP3362W-28M CMIP3362WB-28M	CMIP3362W-M CMIP3362W-6M	CMIP1382W-28MA NEW	CMIP3382NW-28M CMIP3382NW-M	CMIP3382NW-28MA
Resolution	6MP , 3072x2048@20fps	6MP , 3072x2048@20fps	8MP , 3840x2160@15fps	8MP , 3840x2160@15fps	8MP , 3840x2160@15fps
Fixed Lens	2.8mm	4mm, 6mm	2.8mm	2.8mm, 4mm	2.8mm
Lux	0.028 lux @ F2.0	0.028 lux @ F2.0	0.01 lux @ F2.0	0.028 lux @ F2.0	0.028 lux @ F2.0
Compression	H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+
IR	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 98ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft
Audio In/Out	-	-	Built-in Microphone	-	Built-in Microphone
Storage	MicroSD Card Slot up to 128GB, Auto Network Replenishment	MicroSD Card Slot up to 128GB, Auto Network Replenishment	MicroSD Card Slot up to 256GB (Supports Image and Logs Storage Only)	MicroSD Card Slot up to 128GB, Auto Network Replenishment	MicroSD Card Slot up to 128GB, Auto Network Replenishment
Features	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC
Rating	IP67	IP67	IP67	IP67	IP66
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE

Accessories

LTB03-W	LTB03-B	LTB307	LTB307B	LTB301	LTB371	LTB378	LTB379
Junction Box (White)	Junction Box (Black)	Junction Box (White)	Junction Box (Black)	Wall Mount	Pendant Mount 21.5" (55cm)	Pole Mount	Corner Mount

Turret Vari-focal Lens



SKU	CMIP1043W-MZ	CMIP3263NW-SZ	CMIP3283NW-SZ
Resolution	4MP , 2560x1440@20fps	6MP , 3072x2048@20fps	8MP , 3820x2160@15fps
Vari-focal Lens	2.8 - 12mm VF Motorized Lens	2.8 - 12mm VF Motorized Lens	2.8 - 12mm VF Motorized Lens
Lux	0.02 Lux @ F1.6	0.018 Lux @ F1.6	0.018 Lux @ F1.6
Smart Focus	Motorized Lens w/ Smart Focus	Motorized Lens w/ Smart Focus	Motorized Lens w/ Smart Focus
Compression	H.265/H.265+	H.265/H.265+	H.265/H.265+
IR	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft
Storage	MicroSD Card Slot up to 128GB (Supports Image and Logs Storage Only)	MicroSD Card Slot up to 128GB, Auto Network Replenishment	MicroSD Card Slot up to 128GB, Auto Network Replenishment
Features	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC
Audio In/Out	-	Yes	Yes
Alarm In/Out	-	Yes	Yes
Rating	IP67	IP67, IK10	IP67, IK10
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE

Accessories

LTB307	LTB301	LTB342-140	LTB342-140B	LTB341	LTB378	LTB379
Junction Box for CMIP10XX	Wall Mount for CMIP10XX	Wall Mount for CMIP32XX	Wall Mount w/Junction Box for CMIP32XX	Pendant Mount for CMIP32XX (22"/56cm)	Pole Mount	Corner Mount

MSDX64GUII3CL10-CA1
MSDX128GUII3CL10-CA1



- **ADATA Premier ONE 64GB/128GB microSD**
- 3D NAND Inside, Ultra HD 8K, 4K and 3D/VR Recording
- R/W: Up to 275MB/155MB per Second
- UHS-II U3 Class 10 V90
- -25°C to 85°C
- Adapter Included
- Lifetime Warranty

MSDH32GUI3V30G-RA1
MSDX64GUI3V30G-RA1



- **ADATA Premier PRO 32GB/64GB microSD**
- MLC Inside, Ultra HD 4K Recording
- R/W: Up to 95MB/90MB per Second
- UHS-I U3 Class 10 V30
- -25°C to 85°C
- Adapter Included
- Lifetime Warranty

LTSTZZ758
LTSTZZ759



- **Rescue-Data Recovery Services**
- 2 / 3 Year Data Recovery Plan
- Can be used on any brands of Removable Flash Memory, Internal and External SSDS and HDDS

PLATINUM IP CAMERA



Mini Bullet Fixed Lens



SKU	CMIP8022-28M	CMIP8042-28M	CMIP8322W-M	CMIP8342W-28M CMIP8342WB-28M	CMIP8342W-M	CMIP8362W-28M CMIP8362W-M	CMIP8382W-28MA NEW
Resolution	2MP, 1920x1080@30fps	4MP, 2560x1440@20fps	2MP, 1920x1080@30fps	4MP, 2688x1520@30fps	4MP, 2688x1520@30fps	6MP, 3072x2048@20fps	8MP, 3840x2160@15fps
Fixed Lens	2.8mm	2.8mm	2.8mm	2.8mm	4mm	2.8mm 4mm	2.8mm
Lux	0.028 Lux @ F2.0	0.028 Lux @ F2.0	0.028 Lux @ F2.0	0.018 Lux @ F1.6	0.018 Lux @ F1.6	0.028 Lux @ F2.0	0.01 Lux @ F2.0
Compression	H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+
IR	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft	Matrix IR LED up to 100ft
Audio In/Out	-	-	-	-	-	-	Built-in Microphone
Storage	MicroSD/SDHC/SDXC Card Slot up to 128GB (Supports Image and Logs Storage Only)			MicroSD/SDHC/SDXC Card Slot up to 128GB, Auto Network Replenishment			MicroSD/SDHC/SDXC Card Slot up to 128GB (Supports Image and Logs Storage Only)
Features	DWDR, 3D DNR, BLC	DWDR, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC
Rating	IP67	IP67	IP67	IP67	IP67	IP67	IP67
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE

Accessories

LTB345	LTB345B
Junction Box (White)	Junction Box (Black)



Bullet Fixed Lens



SKU	CMIP9342W-28M CMIP9342W-M CMIP9342W-6M	CMIP9362W-28M CMIP9362W-M CMIP9362W-6M	CMIP9382NW-28M CMIP9382NW-M
Resolution	4MP, 2688x1520@30fps	6MP, 3072x2048@20fps	8MP, 3820x2160@15fps
Fixed Lens	2.8mm 4mm 6mm	2.8mm 4mm 6mm	2.8mm 4mm
Lux	0.018 Lux @ F1.6	0.028 Lux @ F2.0	0.028 Lux @ F1.6
Compression	H.265/H.265+	H.265/H.265+	H.265/H.265+
IR	Matrix IR LED up to 165ft	Matrix IR LED up to 165ft	Matrix IR LED up to 165ft
Storage	MicroSD/SDHC/SDXC Card Slot up to 128GB, Auto Network Replenishment	MicroSD/SDHC/SDXC Card Slot up to 128GB, Auto Network Replenishment	MicroSD/SDHC/SDXC Card Slot up to 128GB, Auto Network Replenishment
Features	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC
Rating	IP67	IP67	IP67
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE

Accessories for CMIP93XX

LTB378	LTB379
Pole Mount	Corner Mount



Bullet Vari-focal Lens


SKU	CMIP8043W-MZ	CMIP9743NW-SZ	CMIP9763NW-SZ	CMIP9783NW-SZ
Resolution	4MP, 2560x1440@20fps	4MP, 2688x1520@30fps	6MP, 3072x2048@20fps	8MP, 3820x2160@15fps
Varifocal Lens	2.8 - 12mm Varifocal Motorized Lens	2.8 - 12mm Varifocal Motorized Lens	2.8 - 12mm Varifocal Motorized Lens	2.8 - 12mm Varifocal Motorized Lens
Lux	0.018Lux @ F1.6	0.018 Lux @ F1.6	0.018 Lux @ F1.6	0.018 Lux @ F1.6
Smart Focus	Motorized Lens with Smart Focus	Motorized Lens with Smart Focus	Motorized Lens with Smart Focus	Motorized Lens with Smart Focus
Compression	H.265/H.265+	H.265/H.265+	H.265/H.265+	H.265/H.265+
IR	Matrix IR LED up to 100ft	Matrix IR LED up to 165ft	Matrix IR LED up to 165ft	Matrix IR LED up to 165ft
Storage	MicroSD Card Slot up to 128GB (Supports Image and Logs Storage Only)	MicroSD Card Slot up to 128GB, Auto Network Replenishment	MicroSD Card Slot up to 128GB, Auto Network Replenishment	MicroSD Card Slot up to 128GB, Auto Network Replenishment
Features	True WDR 120 dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC	True WDR 120dB, 3D DNR, BLC
Audio, Alarm	-	3.5mm Audio Jack I/O, Alarm I/O	3.5mm Audio Jack I/O, Alarm I/O	3.5mm Audio Jack I/O, Alarm I/O
Rating	IP67	IP67	IP67	IP67
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE

Accessories

LTB801	LTB378	LTB379
Junction Box for CMIP80XX	Pole Mount	Corner Mount


Thermal IP Camera


SKU	CMIP3T22W1-2M	CMIP9T221-3M
Image Sensor	160x120@25fps Thermal Image Sensor	160x120@25fps Thermal Image Sensor
Thermal Lens	1.8mm Fixed Lens	3.1mm Fixed Lens
Optical Resolution	1920x1080@30fps	1920x1080@30fps
Optical Lens	2.1mm Fixed Lens	4mm Fixed Lens
Storage	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 128GB
WDR	True WDR 120dB	True WDR 120dB
Rating	IP67	IP67


Accessories

LTB701	LTB801	LTB342-140	LTB342-140B	LTB341	LTB378	LTB379
Junction Box for CMIP3TXX	Junction Box for CMIP9TXX	Wall Mount for CMIP3TXX	Wall Mount with Junction Box for CMIP3TXX	Pendant Mount (22"/56cm) for CMIP3TXX	Verticle Pole Mount	Corner Mount

PLATINUM IP CAMERA



Fisheye IP Camera



SKU	CMIP7562NF-SE	CMIP75122NF-SE
Resolution	6MP, 3072x2048@30fps	12MP, 4000x3000@20fps
Fixed Lens	1.27mm	2mm
View	360° Fisheye and 180° Panoramic View	360° Fisheye and 180° Panoramic View
Mode	Multiple Viewing Modes and Virtual PTZ	Multiple Viewing Modes and Virtual PTZ
Compression	H.265/H.265+	H.265/H.265+
IR	Low-Light, IR up to 50ft	Low-Light, IR up to 50ft
Storage	MicroSD Card Slot up to 256GB	MicroSD Card Slot up to 256GB
Features	DWDR	DWDR
Heatmap	Heat Map for Motion Analytics	Heat Map for Motion Analytics
Audio	Built-in Microphone, Audio I/O	Built-in Microphone, Audio I/O
Rating	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof
Scenarios	Outdoor/Indoor	Outdoor/Indoor
Power	DC12V, PoE	DC12V, PoE

360° Scope
No Blind Spots
Adjustable Dewarping and IR Lighting
People Counting and Heat Mapping Functionality

Accessories

LTB756	LTB759	LTB755	LTB378	LTB379
Wall Mount	Ceiling Mount 22" (56cm)	Inclined Ceiling/Wall Mount	Pole Mount	Corner Mount

License Plate Recognition IP Camera

No.	Capture Time	Plate No.	Captured Picture	Lane No.	Direction	Matching Result
21	06:19:2019 14:48:55	SAM-5-9876		1	Forward	Other List



SKU	CMIP7923LPR-22	CMIP7923WLP-32R
Resolution	2MP, 1920x1080@30fps	2MP, 1920x1080@60fps
Varifocal Lens	6 - 22mm Auto Focus VF Motorized Lens	8 - 32 mm Auto Focus VF Motorized Lens
Lux	0.005 Lux @ F1.2, 0 Lux with White Light	0.002 Lux @ F1.2, 0 Lux with IR
IR	4 White Lights for Night Vision	Matrix IR up to 328ft
Features	True WDR 120dB, 3D DNR, BLC, HLC	True WDR 140dB, BLC, HLC
License Plate Recognition	-	Capture Rate > 98%, Recognition Rate > 96%, Searchable from IP Camera & NVR
Storage	MicroSD Card Slot up to 128GB	MicroSD Card Slot up to 256GB
Audio	1 Input (Line in/Mic in), 1 Output, Terminal Block	-
Alarm	1 Input, 1 Output, Terminal Block	2 Input, 2 Output
Rating	IP67, IK10	IP67, IK10

Accessories

LTB801	LTB378	LTB379
Junction Box for CMIP7923LPR-22	Pole Mount	Corner Mount

Multi-lens IP Camera


SKU	CMIP7553W4-SZ8
Resolution	20MP Multi-Lens (4 x 5MP), 2560x1920@25fps
Varifocal Lens	2.8 - 8mm Motorized Lens, Auto Focus, 4 Flexible Lens
Compression	Advanced Compression H.265/H.265+
Features	True WDR 120dB, IR up to 98ft(30m), BLC, HLC, 3D DNR, Defog, EIS
Storage	MicroSD Card Slot up to 128GB, Auto Network Replenishment
Audio	1 Input (line in), 1 Output (line out), Mono Sound
Alarm	2 Inputs, 2 Outputs
Outdoor Rating	IP67
Vandal Proof	IK10
Power	DC 12V/AC 24V, 22W; PoE+ (802.3at), 19W Class4

Accessories

LTB762N	LTB751-20	LTB751	LTB742	LTB397	LTB378
Wall Mount	Pendant Mount 7.8" (20cm)	Pendant Mount 20" (50cm)	Parapet Wall Mount	Corner Mount	Pole Mount

Special IP Camera

CMIP9223W-SZ (Long Range IP Camera)	CMIP182W-28 (Covert IP Camera)
<ul style="list-style-type: none"> • 2MP, 1920x1080@60fps • 4.7 - 94mm Auto Focus VF Motorized Lens • 0.007 Lux @ F1.4 Ultra Low Lux • Matrix IR up to 394ft • True WDR 120dB • MicroSD Card Slot up to 128GB • HLC, 3D DNR, BLC • DC12V, PoE 	<ul style="list-style-type: none"> • 2MP, 1920x1080@30fps • Pinhole Camera • 2.8mm Fixed Lens • H.265/H.265+ • True WDR 120dB • Audio Input: 1 Input (line in) • DC12V

Palm-size PTZ IP Camera

2 Year Warranty



PTZIP202WX4IR	PTZIP204WX4IR
<ul style="list-style-type: none"> • 2MP, 1920x1080P@30fps • 1/3" CMOS • 0.005 Lux @ F1.6 Ultra Low Lux • 2.8 - 12mm, 4x Optical Zoom, Auto Focus • H.265/H.265+/H.264/H.264+ • IR LEDs up to 66ft, Auto Intensity Adjustment • Pan 0° to 330°, Tilt 0° to 90° • True WDR 120dB, 3D DNR, HLC, BLC, EIS • Two Way Audio • MicroSD Card Slot up to 256GB, ANR • IK10 Vandal Proof, IP66, Lightning/Surge Protection • DC 12V, PoE (802.3 af) Max 12W • 2.5" (Φ) Outdoor/Indoor • PoE Injector and Wall Mount (LTB202) Sold Separately • 2 Year Warranty 	<ul style="list-style-type: none"> • 4MP, 2560x1440P@30fps • 1/3" CMOS • 0.005 Lux @ F1.6 Ultra Low Lux • 2.8 - 12mm, 4x Optical Zoom, Auto Focus • H.265/H.265+/H.264/H.264+ • IR LEDs up to 66ft, Auto Intensity Adjustment • Pan 0° to 330°, Tilt 0° to 90° • True WDR 120dB, 3D DNR, HLC, BLC, EIS • Two Way Audio • MicroSD Card Slot up to 256GB, ANR • IK10 Vandal Proof, IP66, Lightning/Surge Protection • DC 12V, PoE (802.3 af) Max 12W • 2.5" (Φ) Outdoor/Indoor • PoE Injector and Wall Mount (LTB202) Sold Separately • 2 Year Warranty

Accessories

LTB202	
Wall Mount	
LTB773	LTB774
Pendant Mount 7.8" (20cm)	Pendant Mount 78" (200cm)

1 Camera with:

- 4 Lenses, 4 Video Streams
- 360 Degree Views
- 1 Cat5 Cable Needed for Installation

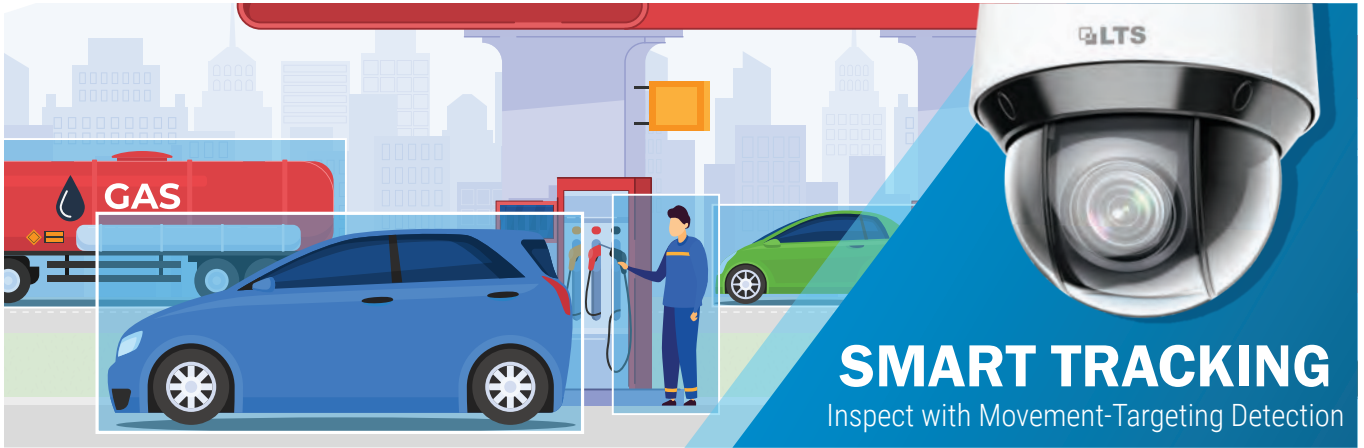

SKU	PTZIP412X15WIR	PTZIP414X25WIR	PTZIP514X25WIR	PTZIP772X32WIR	PTZIP688X36
Resolution	2.1MP 1080P, 1920x1080P@30fps	4MP , 2560x1440@30fps	4MP , 2560x1440@30fps	2.1MP 1080P, 1920x1080P@60fps	4K/8MP , 4096x2160@30fps
Image Sensor	1/2.8" CMOS	1/2.5" CMOS	1/2.8" CMOS	1/2.8" CMOS	2/3" CMOS
Lens & Zoom	5 - 75mm, 15x Optical Zoom, Auto Focus	4.8 - 120mm, 25x Optical Zoom, Auto Focus	4.8 - 120mm, 25x Optical Zoom, Auto Focus	4.8 - 153mm, 32x Optical Zoom, Auto Focus	7.5 - 270mm, 36x Optical Zoom, Auto Focus
Lux	0.005 Lux @ F1.6 Ultra Low Lux	0.005 Lux @ F1.6 Ultra Low Lux	0.005 Lux @ F1.6 Ultra Low Lux	0.005 Lux @ F1.6 Ultra Low Lux	0.005 Lux @ F1.6 Ultra Low Lux
Compression	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+
IR Technology	IR LEDs up to 164ft, Auto Intensity Adjustment	IR LEDs up to 164ft, Auto Intensity Adjustment	IR LEDs up to 492ft, Auto Intensity Adjustment	IR LEDs up to 492ft, Auto Intensity Adjustment	-
Smart Tracking	Yes	Yes	Yes	Yes	Yes
Storage	MicroSD Card Slot up to 256GB, Auto Network Replenishment		MicroSD Card Slot up to 256GB, Auto Network Replenishment	MicroSD Card Slot up to 256GB, Auto Network Replenishment	MicroSD Card Slot up to 256GB, Auto Network Replenishment
Movement Range	-5° to 90°(Auto-flip)	-5° to 90°(Auto-flip)	-15° to 90°(Auto-flip)	-15° to 90°(Auto-flip)	-20° to 90°(Auto-flip)
Image Enhancement	True WDR 120dB, 3D DNR, HLC, BLC, Defog, EIS	True WDR 120dB, 3D DNR, HLC, BLC, Defog, EIS	True WDR 120dB, 3D DNR, HLC, BLC, Defog, EIS	True WDR 120dB, 3D DNR, HLC, BLC, Defog, EIS	DWDR, 3D DNR, HLC, BLC, Defog
Audio & Alarm	Audio I/O, Alarm I/O	Audio I/O, Alarm I/O	Audio I/O, Alarm I/O	Audio I/O, Alarm I/O	Audio I/O, Alarm I/O
Outdoor Rating	IK10, IP66 Lightning/Surge Protection	IK10, IP66 Lightning / Surge Protection	IP66 Lightning / Surge Protection	IP66 Lightning / Surge Protection	IK10, IP67 Lightning / Surge Protection
Power	DC 12V, PoE+(802.3 at, class4), Max 18W	DC 12V, PoE+(802.3 at, class4), Max 18W	AC 24V, High PoE Max 40W	AC 24V, High PoE Max 40W	AC 24V, High PoE Max 50W
Dimensions	4" (Φ)	4" (Φ)	5" (Φ)	7" (Φ)	6" (Φ)
Accessories	Wall Mount Bracket (LTB412) Included, PoE+ (30W) Sold Separately		Wall Mount Bracket (LTB762N) Included, High PoE Injector (60W) Sold Separately	Wall Mount Bracket (LTB762N) Included, High PoE Injector (60W) Included	Wall Mount Bracket (LTB688-B) Included, High PoE Injector (60W) Sold Separately

Accessories

LTB762N	LTB412	LTB378	LTB397	LTB751-20	LTB751	LTB742	POE-1100GH	POE-PTZI60N	KB837
Wall Mount for PTZ51XX/PTZIP77XX	Wall Mount for PTZIP41XX	Pole Mount	Corner Mount	Pendant Mount 7.8" (20cm)	Pendant Mount 20" (50cm)	Parapet Wall Mount	PoE+ (30W)	High PoE+ (60W)	Joystick for NVR/ DVR/NVMS7000 PC (Connect via USB)



SKU	PTZH212X25W	PTZH512X25WIR
Resolution	2.1MP Full HD 1080P, 1920x1080P@30fps	2.1MP Full HD 1080P, 1920x1080P@30fps
Image Sensor	1/2.8" CMOS	1/2.8" CMOS
Lens & Zoom	4.8 - 120mm, 25x Optical Zoom, Auto Focus	4.8 - 120mm, 25x Optical Zoom, Auto Focus
Lux	0.005Lux @ F1.6 Ultra Low Lux	0.005 Lux @ F1.6 Ultra Low Lux
IR Technology	-	IR LEDs up to 492ft, Auto Intensity Adjustment
Smart Tracking	3D Intelligent Positioning, Privacy Masking	3D Intelligent Positioning, Privacy Masking
Movement Range	5° to 90°(Auto-flip)	-15° to 90°(Auto-Flip)
Feature	True WDR 120dB, 3D DNR, BLC, EIS	True WDR 120dB, 3D DNR, BLC, EIS
Alarm	Alarm I/O	Alarm I/O
Video Output	Switchable Turbo HD and CVBS Outputs	BNC Output, Switchable Turbo HD and CVBS outputs
Rating	IK10, IP66, Lightning/Surge Protection	IP66 Lightning/Surge Protection
Power	AC 24V, Max 20W	AC 24V, Max 30W
Dimensions	4" (Φ)	5" (Φ)
Accessory	Wall Mount Bracket Included	Wall Mount Bracket Included

Accessories

KB833		KB837	
For TVI and Analog PTZs (Connect via RS485)		Joystick For NVR/DVR/NVMS7000 PC (Connect via USB)	
LTB762N		LTB397	
Wall Mount for PTZH51XX		Corner Mount	
LTB378	LTB751-20	LTB751	LTB742
Pole Mount	Pendant Mount 7.8" (20cm)	Pendant Mount 20" (50cm)	Parapet Wall Mount

Wireless Video Station

Model: G5-VS-277-1

Feature

- Plug-n-play Installation
- Built-in Industrial Grade 4 Ports POE+ Switch
- Built-in Wireless Network Transmitting System for Delivering High Definition Video Streams up to 9 Miles
- 8MP/20MP 4K Resolution IP Camera with True WDR and Motorized Lens
- Built-in Smart Control Node for Powering on/off Cameras and Wireless Network System
- Take 110-277VAC as Power Input
- Built-in Pole Mount Bracket, Pre-drilled Mounting Holes For Cameras
- Monitor the Power Quality and Energy Consumption in Real-time
- IP66 Rated, Weather-proof
- 10K Surge Protection
- Standard 3-year Warranty


Application

- Car Dealership
- Department Store
- Warehouse
- Parking Lot
- Public Street & Highway
- School & Corporate Campus
- Smart City
- Jogging & Bike Pathway
- School & Corporate Campus



5-in-1 DVR

Supports All Video Formats

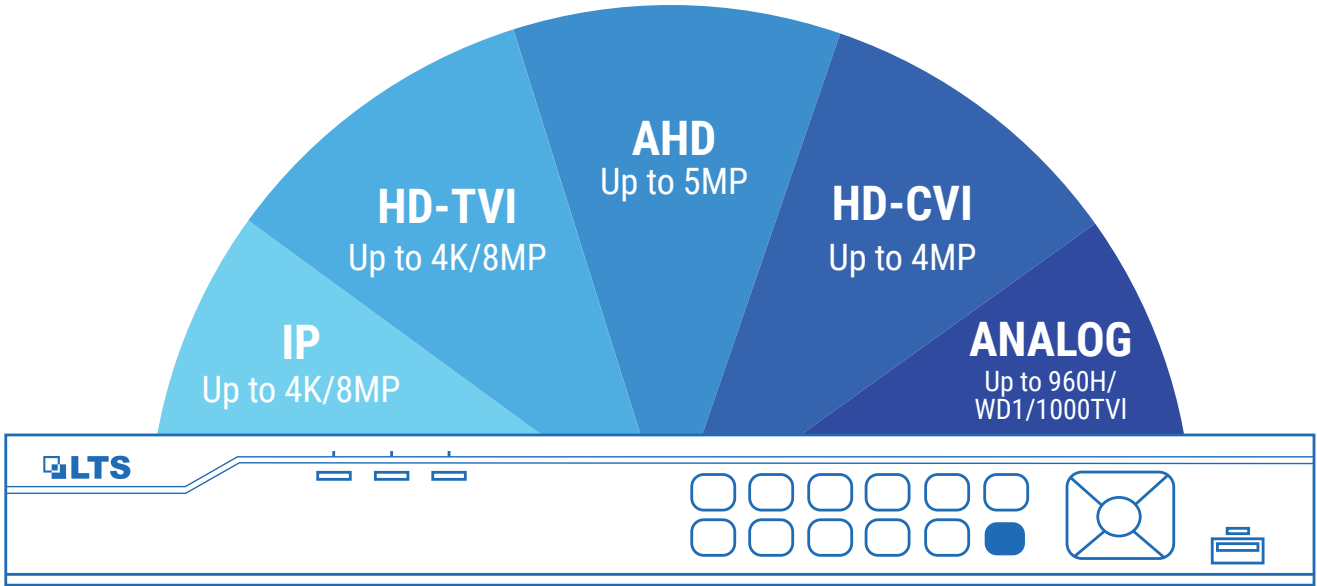

SKU	LTD8304K-ET	LTD8308K-ETC	LTD8316K-ET
Series	Advanced Level	Advanced Level	Advanced Level
Analog Video Input	4CH (TVI/AHD/CVI/960H) Channel 1 up to 4MP	8CH (TVI/AHD/CVI/960H) Channel 1&2 up to 4MP	16CH (TVI/AHD/CVI/960H) Channel 1-4 up to 4MP
Record Rate	1080P@30fps, CH 1 up to 4MP@15fps	1080P@30fps, CH 1&2 up to 4MP@15fps	1080P@30fps, CH 1-4 up to 4MP@15fps
IPC Input	2CH (up to 6CH), Up to 6MP Resolution	4CH (up to 12CH), Up to 6MP Resolution	8CH (Up to 24CH), Up to 6MP Resolution
Video Output	VGA/HDMI up to 1920x1080P, CVBS	VGA/HDMI up to 1920x1080P, CVBS	HDMI up to 4K (3840x2160)/ VGA up to 1080P, CVBS
Decoding Format	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+
Playback Channel	4CH	8CH	16CH
Audio In/Out	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	-	-	-
Network	10/100M, 1 RJ45	10/100M, 1 RJ45	10/100/1000M, 1 RJ45
Storage	1 SATA up to 10TB	1 SATA up to 10TB	2 SATA up to 20TB
PTZ	1 RS485	1 RS485	1 RS485
Support POS#	-	-	-
USB	2 USB 2.0	2 USB 2.0	1 USB 2.0, 1 USB 3.0
Dimensions	12.4"(W)x9.1"(D)x1.8"(H)	12.4"(W)x9.1"(D)x1.8"(H)	15"(W)x12.4"(D)x1.8"(H)



SKU	LTD8504K-ST	LTD8504K-DT	LTD8508K-ST	LTD8516K-ST
Series	Professional Level	Professional Level	Professional Level	Professional Level
Analog Video Input	4CH (HD-TVI/AHD/CVI/960H)	4CH (HD-TVI/AHD/CVI/960H)	8CH (HD-TVI/AHD/CVI/960H)	16CH (HD-TVI/AHD/CVI/960H)
Analog Input	5MP@12fps / 2MP@30fps	8MP@8fps / 5MP@12fps / 2MP@30fps	8MP@8fps / 5MP@12fps / 2MP@30fps	8MP@8fps / 5MP@12fps / 2MP@30fps
IPC Input	4CH (up to 8CH), Up to 8MP Resolution	4CH (up to 8CH), Up to 8MP Resolution	8CH (up to 16CH), Up to 8MP Resolution	16CH (up to 32CH), Up to 8MP Resolution
Video Output	HDMI/VGA up to 1080P, CVBS	HDMI/VGA up to 1080P, CVBS	HDMI up to 4K (3840 x 2160)/VGA up to 1080P, CVBS	HDMI up to 4K (3840 x 2160)/VGA up to 1080P, CVBS
Decoding Format	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+
Deep Learning Support	-	4CH Human/Vehicle Detection	-	-
Playback Channel	4CH	4CH	8CH	16CH
Audio In/Out	4CH/1CH, RCA	4CH/1CH, RCA	4CH/1CH, RCA	4CH/1CH, RCA
Alarm In/Out	4/1	4/1	8/4	16/4
Network	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45
Storage	1 SATA up to 10TB, NAS, IP SAN	1 SATA up to 10TB, NAS, IP SAN	2 SATA up to 20TB, NAS, IP SAN	2 SATA up to 20TB, NAS, IP SAN
PTZ	1 RS485	1 RS485	1 RS485	1 RS485
Support POS#	-	-	-	2 (TCP)
USB	2 USB 2.0	2 USB 2.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0
Dimensions	12.4"(W)x9.1"(D)x1.8"(H)	12.4"(W)x9.1"(D)x1.8"(H)	15"(W)x12.4"(D)x1.8"(H)	15"(W)x12.4"(D)x1.8"(H)



SKU	LTD9224T-FA	LTD8424K-EA	LTD8432K-EA	LTD8416K-ST	LTD8424K-ST	LTD8432K-ST
Series	Enterprise Level	Enterprise Level	Enterprise Level	Enterprise Level	Enterprise Level	Enterprise Level
Analog Video Input	24CH (HD-TVI)	24CH (HD-TVI/AHD/CVI/960H)	32CH (HD-TVI/AHD/CVI/960H)	16CH (HD-TVI/AHD/CVI/960H)	24CH (HD-TVI/AHD/CVI/960H)	32CH (HD-TVI/AHD/CVI/960H)
Analog Input	2MP@15fps, 720P@30fps	2MP@30fps	2MP@30fps	8MP@8fps / 5MP@12fps / 2MP@30fps	8MP@8fps / 5MP@12fps / 2MP@30fps	8MP@8fps / 5MP@12fps / 2MP@30fps
IPC Input	Up to 16CH 1080P@30fps	16CH (up to 40CH/48CH), Up to 6MP Resolution	16CH (up to 40CH/48CH), Up to 6MP Resolution	2CH up to 4K/8MP(3840x2160)	8CH up to 4K/8MP(3840x2160)	8CH up to 4K/8MP(3840x2160), Adjustable up to 40CH
Decoding Format	H.264 / H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+	H.265/H.265+/H.264/H.264+
Video Output	HDMI1/VGA, HDMI2 up to 1080P	HDMI1/VGA1 up to 1080P, HDMI2/VGA2 up to 4K (3840x2160)	HDMI1/VGA1 up to 1080P, HDMI2/VGA2 up to 4K (3840x2160)	HDMI1/VGA up to 1920x1080P, HDMI2 up to 4K (3840x2160), CVBS (704x480)	HDMI1/VGA up to 1920x1080P, HDMI2 up to 4K (3840x2160), CVBS (704x480)	HDMI1/VGA up to 1920x1080P, HDMI2 up to 4K (3840x2160), CVBS (704x480)
Playback Channel	24CH	16CH	16CH	16CH	16CH	16CH
Audio In/Out	16CH/1CH, RCA	4CH/1CH, RCA	4CH/1CH, RCA	4CH/1CH, RCA	4CH/1CH, RCA	4CH/1CH, RCA
Alarm In/Out	16/8	16/4	16/4	16/4	16/4	16/4
Network	10/100/1000Mbps, 2 RJ45	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 1 RJ45	10/100/1000Mbps, 2 RJ45	10/100/1000Mbps, 2 RJ45	10/100/1000Mbps, 2 RJ45
Storage	8 SATA up to 48TB, NAS, IP SAN	4 SATA up to 40TB, NAS, IP SAN	4 SATA up to 40TB, NAS, IP SAN	4 SATA up to 40TB, NAS, IP SAN, RAID 0, 1, 5, 6 and 10 Hot Swap	4 SATA up to 40TB, NAS, IP SAN, RAID 0, 1, 5, 6 and 10 Hot Swap	4 SATA up to 40TB, NAS, IP SAN, RAID 0, 1, 5, 6 and 10 Hot Swap
eSATA	Support	Support	Support	Support	Support	Support
USB	3 USB 2.0	2 USB 2.0, 1 USB 3.0	2 USB 2.0, 1 USB 3.0	2 USB 2.0, 1 USB 3.0	2 USB 2.0, 1 USB 3.0	2 USB 2.0, 1 USB 3.0
PTZ	RS-485 (full-duplex), Keyboard	RS-485 (full-duplex), Keyboard	RS-485 (full-duplex), Keyboard	RS-485 (full-duplex), Keyboard	RS-485 (full-duplex), Keyboard	RS-485 (full-duplex), Keyboard
Support POS#	16 (TCP)	8 (TCP)	8 (TCP)	8 (TCP or RS232)	8 (TCP or RS232)	8 (TCP or RS232)
Dimensions	17.5"(W)x18.5"(D)x3.5"(H)	17.5"(W)x15.3"(D)x2.8"(H)	17.5"(W)x15.3"(D)x2.8"(H)	17.5"(W)x15.3"(D)x2.8"(H)	17.5"(W)x15.3"(D)x2.8"(H)	17.5"(W)x15.3"(D)x2.8"(H)

Color247 HD-TVI Camera



Color247 Camera

Traditional IR Camera

Full Color, Day and Night



COLOR 247 TRUE WDR FOUR



COLOR 247 TRUE WDR FOUR



COLOR 247 TRUE WDR FOUR



Junction Box Included

COLOR 247 TRUE WDR FOUR



Junction Box Included

COLOR 247 TRUE WDR FOUR

SKU	CMHT1722W-28CF CMHT1722W-CF	CMHT1752W-28CF	CMHR6422W-CF	CMHR9222W-CF	CMHR9252W-28CF
Resolution	2MP 1920x1080P@30fps	5MP 2560x1944P@20fps	2MP 1920x1080P@30fps	2MP 1920x1080P@30fps	5MP 2560x1944P@20fps
Fixed Lens	2.8mm 3.6mm	2.8mm	3.6mm	3.6mm	2.8mm
Lux	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0	0.0005 Lux @ F1.0
IR	Clear White LEDs up to 65ft	Clear White LEDs up to 65ft	Clear White LEDs up to 65ft	Clear White LEDs up to 131ft	Clear White LEDs up to 131ft
WDR	True WDR 130dB	True WDR 130dB	True WDR 130dB	True WDR 130dB	True WDR 130dB
Output	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable
IP Rating	IP67	IP67	IP67	IP67	IP67
Power	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V

Accessories

LTB03-W	LTB307	LTB301	LTB345
Junction Box for CMHT17XX	Junction Box for CMHT17XX	Wall Mount for CMHT17XX	Universal Junction Box for CMHT64XX

Turret Fixed Lens


SKU	CMHT2122-28F CMHT2122B-28F	CMHT2122F CMHT2122BF	CMHT2722-28	CMHT1722B-28F CMHT1722F	CMHT1722WE-28F CMHT1722WE-F
Resolution	2MP 1920x1080P@30fps	2MP 1920x1080P@30fps	2MP 1920x1080P@30fps	2MP 1920x1080P@30fps	2MP 1920x1080P@30fps
Fixed Lens	2.8mm	3.6mm	2.8mm	2.8mm 3.6mm	2.8mm 3.6mm
Lux	0.01 Lux @ F1.2	0.01 Lux @ F1.2	0.01 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2
IR	Up to 65ft	Up to 65ft	Up to 131ft	Matrix IR up to 131ft	Matrix IR up to 197ft
WDR	DWDR	DWDR	-	DWDR	True WDR 130dB
Output	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable
IP Rating	IP66	IP66	IP66	IP66	IP67
Power	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V

Accessories

LTB345	LTB345B	LTB03-W	LTB03-B	LTB307	LTB307B	LTB342-110T	LTB301	LTB371	LTB378	LTB379
Junction Box (White/Black) for CMHT21XX		Junction Box (White/Black) for CMHT27XX, 17XX		Junction Box (White/Black) for CMHT27XX, 17XX		Wall Mount for CMHT21XX	Wall Mount for CMHT27XX, 17XX	Pendant Mount 21.5" (55cm) for CMHT27XX, 17XX	Pole Mount	Corner Mount



SKU	CMHT1352N-28F CMHT1352N-F	CMHT1752N-28F CMHT1752N-F	CMHT1752WE-28F	CMHT1782-28F
Resolution	5MP 2560x1944P@20fps	5MP 2560x1944P@20fps	5MP 2560x1944P@20fps	8MP 3840x2160P@15fps
Fixed Lens	2.8mm 3.6mm	2.8mm 3.6mm	2.8mm	2.8mm
Lux	0.01 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2
IR	Matrix IR up to 65ft	Matrix IR up to 131ft	Matrix IR up to 197ft	Matrix IR up to 197ft
WDR	DWDR	DWDR	True WDR 130dB	DWDR
Output	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable
IP Rating	IP67	IP67	IP67	IP67
Power	DC 12V	DC 12V	DC 12V	DC 12V

Accessories

LTB345	LTB342-110T	LTB378	LTB379	LTB301	LTB307	LTB03-W	LTB371
Junction Box for CMHT13XX	Wall Mount	Pole Mount	Corner Mount	Wall Mount	Junction Box White for CMHT17XX	Junction Box for CMHT17XX	Pendant Mount 21.5" (55cm) for CMHT17XX

Turret Vari-focal Lens



SKU	CMHT1823	CMHT1923WE-ZF	CMHT1953N-ZF	CMHT1983-ZF
Resolution	2MP 1920x1080P@30fps	2MP 1920x1080P@30fps	5MP 2560x1944P@20fps	8MP 3840x2160P@15fps
Varifoca Lens	2.8 - 12mm Varifocal Lens	2.7 - 13.5mm Varifocal Motorized Lens, Auto Focus	2.7 - 13.5mm Varifocal Motorized Lens, Auto Focus	2.7 - 13.5mm Varifocal Motorized Lens, Auto Focus
Lux	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.01 Lux @ F1.2
IR	Up to 131ft	Matrix IR up to 197ft	Matrix IR up to 131ft	Matrix IR up to 197ft
WDR	-	True WDR 130dB	DWDR	DWDR
Output	HD-TVI	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable
IP Rating	IP66	IP67	IP67	IP67
Power	DC 12V	DC 12V	DC 12V	DC 12V

Accessories

LTB307	LTB307B	LTB301	LTB378	LTB379
Junction Box (White)	Junction Box (Black)	Wall Mount	Pole Mount	Corner Mount

Dome Fixed Lens



SKU	CMHD7422-28 CMHD7422B-28	CMHD7422 CMHD7422B	CMHD7322WE-28F	CMHD7352N-28F	CMHD7352WE-28F	CMHD7382-28F
Resolution	2MP 1920x1080P@30fps		2MP 1920x1080P@30fps	5MP 2560x1944P@20fps	5MP 2560x1944P@20fps	8MP 3840x2160P@15fps
Fixed Lens	2.8mm	3.6mm	2.8mm	2.8mm	2.8mm	2.8mm
Lux	0.01 Lux @ F1.2		0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2
IR	Up to 65ft, Smart IR		Matrix IR up to 98ft	Matrix IR up to 65ft	Matrix IR up to 98ft	Matrix IR up to 98ft
WDR	-		True WDR 130dB	DWDR	True WDR 130dB	DWDR
Output	HD-TVI		TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable
Rating	IP66, IK10		IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Axis	3-Axis		3-Axis	3-Axis	3-Axis	3-Axis
Power	DC 12V		DC 12V	DC 12V	DC 12V	DC 12V

Accessories

LTB347	LTB347B	LTB349	LTB348	LTB348B	LTB342-110	LTB342-110B	LTB376	LTB378	LTB379
Junction Box (White/Black)		Angled Ceiling Mount (15°)	Wall Mount (White/Black)		Wall Mount	Wall Mount with Junction Box	Pendant Mount 22"(56cm)	Pole Mount	Corner Mount

Dome Vari-focal Lens


SKU	CMHD3523DWE-ZF	CMHD3553DN-ZF
Resolution	2MP 1920x1080P@30fps	5MP 2560x1944P@20fps
Variofocal Lens	2.7 - 13.5mm Varifocal Motorized Lens, Auto Focus	2.7 - 13.5mm Varifocal Motorized Lens
Lux	0.003 Lux @ F1.2	0.01 Lux @ F1.2
IR	Matrix IR up to 197ft	Matrix IR up to 197ft
WDR	True WDR 130dB	DWDR
Output	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable
Rating	IK10, IP67	IK10, IP67
Axis	3 Axis	3 Axis
Power	DC 12V, AC 24V	DC 12V, AC 24V

Accessories

LTB342-140		LTB342-140B	
Wall Mount		Wall Mount with Junction Box	
LTB378	LTB379	LTB340	
Pole Mount	Corner Mount	In-Ceiling Mount	

Bullet Fixed Lens


SKU	CMHR6222	CMHR6422WE-28F	CMHR6452N-28F
Resolution	2MP 1920x1080P@30fps	2MP 1920x1080P@30fps	5MP 2560x1944P@20fps
Fixed Lens	3.6mm	2.8mm	2.8mm
Lux	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2
IR	IR up to 65ft	Matrix IR up to 100ft	Matrix IR up to 65ft
WDR	-	True WDR 130dB	DWDR
Output	HD-TVI	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable
IP Rating	IP66	IP67	IP67
Power	DC 12V	DC 12V	DC 12V

Accessories

LTB345
Junction Box (White)
LTB345B
Junction Box (Black)



SKU	CMHR9422N-F	CMHR9222WE-28F	CMHR9252N-28F CMHR9252N-6F	CMHR9252WE-28F	CMHR9282-28F
Resolution	2MP 1920x1080P@30fps	2MP 1920x1080P@30fps	5MP 2560x1944P@20fps	5MP 2560x1944P@20fps	8MP 3840x2160P@15fps
Fixed Lens	3.6mm	2.8mm	2.8mm 6mm	2.8mm	2.8mm
Lux	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2	0.003 Lux @ F1.2	0.01 Lux @ F1.2
IR	Matrix IR up to 131ft	Matrix IR up to 197ft	Matrix IR up to 131ft	Matrix IR up to 197ft	Matrix IR up to 197ft
WDR	-	True WDR 130dB	DWDR	True WDR 130dB	DWDR
Output	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable
IP Rating	IP67	IP67	IP67	IP67	IP67
Power	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V
Accessory	Junction Box Included	Junction Box Included	Junction Box Included	Junction Box Included	Junction Box Included

Bullet Vari-focal Lens



SKU	CMHR9323D	CMHR9623DWE-ZF	CMHR9653DN-ZF	CMHR6123DWA
Resolution	2MP 1920x1080P@30fps	2MP 1920x1080P@30fps	5MP 2560x1944P@20fps	2MP 1920x1080P@30fps
Vari-focal Lens	2.8 - 12mm Varifocal Lens	2.7 - 13.5mm Varifocal Motorized Lens, Auto Focus	2.7 - 13.5mm Varifocal Motorized Lens	5 - 50mm Varifocal Lens, Auto Focus
Lux	0.01 Lux @ F1.2	0.003 Lux @ F1.2, Ultra Low Lux	0.01 Lux @ F1.2	0.01 Lux @ F1.2
IR	IR up to 165ft	Matrix IR up to 263ft	Matrix IR up to 131ft	Matrix IR up to 360ft
WDR	-	True WDR 130dB	DWDR	True WDR 120dB
Output	HD-TVI	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	HD-TVI, CVBS Output
IP Rating	IP66	IP67	IP67	IP66
Power	DC 12V, AC 24V	DC 12V, AC 24V	DC 12V, AC 24V	DC 12V, AC 24V
Accessory	Junction Box Included	Junction Box Included	Junction Box Included	Junction Box Included

License Plate Recognition HD-TVI Camera

SKU	LPR100
Resolution	1.3MP HD License Plate Capture 1280 x 960P@30fps
Vari-focal Lens	6 - 22mm VF Motorized Lens
Lux	0.001 Lux
IR	6 Clear White Lights up to 131ft
Feature	CVBS Output
Output	HD-TVI
Power	DC 12V
IP Rating	IP66




*LTB100 Wall Mount Included



HD-TVI Covert Camera



SKU	CM1922T	CM1924T	CM1925T-IR
Resolution	2MP 1920x1080P@30fps	2MP 1920x1080P@30fps	2MP 1920x1080P@30fps
Fixed Lens	3.7mm Pinhole Lens	3.7mm Pinhole Lens	3.7mm Pinhole Lens
IR	-	-	IR LEDs up to 50ft, Smart IR
Output	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable	TVI/AHD/CVI/960H Switchable
Power	DC 12V	DC 12V	DC 12V

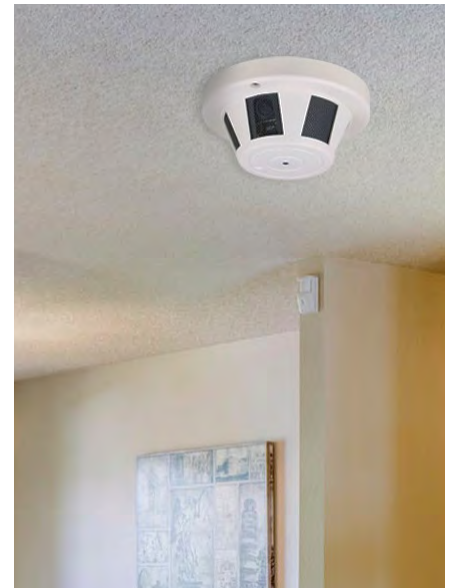

Designed For GOVERNMENT PROJECTS



SKU	VSN7104-P4	VSN7208-P8	VSN7216-P16	VSN7432-P16
Series	Pro-VS	Pro-VS	Pro-VS	Pro-VS
Video Input	4CH IP@80Mbps	8CH IP@160Mbps	16CH IP@160Mbps	32CH IP@160Mbps
Video Output	HDMI up to 4K(3840x2160)/ VGA up to 1080P	HDMI up to 4K(3840x2160)/ VGA up to 1080P	HDMI up to 4K(3840x2160)/ VGA up to 1080P	HDMI up to 4K(3840x2160)/ VGA up to 1080P
Max. Recording Resolution	Up to 8MP(3840x2160)	Up to 8MP(3840x2160)	Up to 8MP(3840x2160)	Up to 8MP(3840x2160)
Decoding Format	Ultra 265/H.265/H.264	Ultra 265/H.265/H.264	Ultra 265/H.265/H.264	Ultra 265/H.265/H.264
Decoding Capability	1CH@4K / 4CH@1080P	2CH@4K / 8CH@1080P	2CH@4K / 8CH@1080P	2CH@4K / 8CH@1080P
Max. Playback Resolution	Up to 8MP(3840x2160)	Up to 8MP(3840x2160)	Up to 8MP(3840x2160)	Up to 8MP(3840x2160)
Audio In/Out	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	-	4CH/1CH	4CH/1CH	16CH/4CH
Built-in PoE	4CH	8CH	16CH	16CH
Network	10/100M, 1 RJ45	10M/100M/1000M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45
Storage	1 SATA up to 10TB	2 SATA up to 10TB	2 SATA up to 10TB	4 SATA up to 14TB
Backup	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0
Dimensions	10.2"(W)x9.4"(D)x1.9"(H)	14.9"(W)x12.4"(D)x2.1"(H)	14.9"(W)x12.4"(D)x2.1"(H)	15.7"(W)x14.2"(D)x2.9"(H)
Recorder Case	Mini 1U	1U	1U	1.5U



Fixed Lens



SKU	VSIP3442W-28MA	VSIP3182W-28	VSIP7442W-28S	VSIP7182W-28	VSIP8442W-28MA	VSIP8182W-28
Resolution	4MP, 2688x1520@30fps	8MP, 3840x2160@20fps	4MP, 2592x1520@30fps	8MP, 3840x2160@20fps	4MP, 2592x1520@30fps	8MP, 3840x2160@20fps
Fixed Lens	2.8mm	2.8mm	2.8mm	2.8mm	2.8mm	2.8mm
Lux	0.01 Lux @ F2.0	0.05 Lux @ F2.0	0.01 Lux @ F2.0	0.05 Lux @ F2.0	0.01 Lux @ F2.0	0.05 Lux @ F2.0
Compression	Ultra 265/H.265/H.264	Ultra 265/H.265/H.264	Ultra 265/H.265/H.264	Ultra 265/H.265/H.264	Ultra 265/H.265/H.264	Ultra 265/H.265/H.264
IR	Smart IR LED up to 98ft	Smart IR LED up to 98ft	Smart IR LED up to 98ft	Smart IR LED up to 98ft	Smart IR LED up to 98ft	Smart IR LED up to 98ft
Feature	True WDR 120dB, 3D DNR, BLC, HLC, Digital Defog	True WDR 120dB, 3D DNR, BLC, HLC, Digital Defog	True WDR 120dB, 3D DNR, BLC, HLC, Digital Defog	True WDR 120dB, 3D DNR, BLC, HLC, Digital Defog	True WDR 120dB, 3D DNR, BLC, HLC, Digital Defog	True WDR 120dB, 3D DNR, BLC, HLC, Digital Defog
Audio	Built-in Mic	-	Audio In/Out	-	Built-in Mic	-
Alarm	-	-	Alarm In/Out	-	-	-
Storage	MicroSD up to 256GB, Automatic Network Replenishment	-	MicroSD up to 256GB, Automatic Network Replenishment	-	MicroSD up to 256GB, Automatic Network Replenishment	-
Axis	3 Axis	3 Axis	3 Axis	3 Axis	3 Axis	3 Axis
Rating	IP67, 2KV Surge Protection	IP67, 2KV Surge Protection	IP67, IK10 Vandal Proof, 2KV Surge Protection	IP67, IK10 Vandal Proof, 2KV Surge Protection	IP67, 2KV Surge Protection	IP67, 2KV Surge Protection
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE

Vari-focal Lens




SKU	VSIP7643W-SZ	VSIP9643W-SZ
Resolution	4MP, 2592x1520@30fps	4MP, 2592x1520@30fps
Variocal Lens	2.8 - 12mm, Auto Focus Motorized Zoom Lens	2.8 - 12mm, Auto Focus Motorized Zoom Lens
Lux	0.003 Lux @ F1.6	0.003 Lux @ F1.6
Compression	Ultra 265/H.265/H.264	Ultra 265/H.265/H.264
IR	Smart IR LED up to 98ft	Smart IR LED up to 164ft
Feature	True WDR 120dB, 3D DNR, BLC, HLC, Digital Defog	True WDR 120dB, 3D DNR, BLC, HLC, Digital Defog
Audio	Audio In/Out	Audio In/Out
Alarm	Alarm In/Out	Alarm In/Out
Storage	MicroSD up to 256GB, Automatic Network Replenishment	
Axis	3 Axis	3 Axis
Rating	IP67, IK10 Vandal Proof, 6KV Surge Protection	IP67, 6KV Surge Protection
Power	DC 12V, PoE	DC 12V, PoE

Accessories

VSJB342	VSJB742	VSJB842
Junction Box for VSIP3442W-28MA, VSIP3182W-28	Junction Box for VSIP7442W-28S, VSIP7182W-28	Junction Box for VSIP8442W-28MA, VSIP8182W-28
VSWM342	VSWM763	VSPM963
Wall Mount for VSIP3442W-28MA, VSIP7442W-28S, VSIP3182W-28, VSIP7182W-28	Wall Mount for VSIP7643W-SZ	Pole Mount for VSIP9643W-SZ

SMD-Enhance Detection and Searching

Search Humans & Vehicles within your footage in seconds using Smart Motion Detection Smart Search

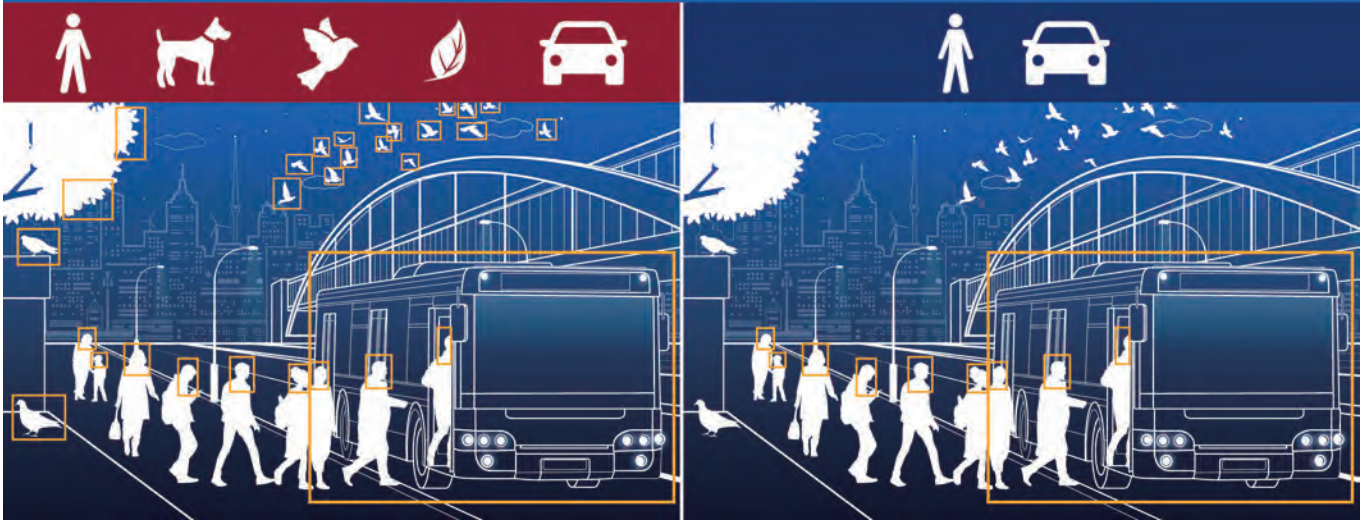

Network Video Recorder

LTN6104-P4	LTN6208-P8	LTN6216-P16 NVR-P16-16P-2VA	LTN6416	LTN6416-P16 NVR-P16-16P-4VA
<ul style="list-style-type: none"> • 4CH 4K NVR • 4 Built-in PoE • H.265/H.264 • 80MB Bandwidth Max • Resolution: 8MP/4K • HDMI (4K: 3840x2160)/VGA 1080P • 1 SATA up to 6TB • 100M, 1 Network Port 	<ul style="list-style-type: none"> • 8CH 4K NVR • 8 Built-in PoE • H.265/H.264 • 200MB Bandwidth Max • Resolution: 8MP/4K • HDMI (4K: 3840x2160)/VGA 1080P • 2 SATA up to 12TB • Audio I/O, 1CH/1CH, RCA • Alarm I/O: 4/2 • 10/100/1000M, 1 Network Port 	<ul style="list-style-type: none"> • 16CH 4K NVR • 16 Built-in PoE • H.265/H.264 • 200MB Bandwidth Max • Resolution: 8MP/4K • HDMI (4K: 3840x2160)/VGA 1080P • 2 SATA up to 12TB • Audio I/O, 1CH/1CH, RCA • Alarm I/O: 4/2 • 10/100/1000M, 1 Network Port 	<ul style="list-style-type: none"> • 16CH 4K NVR • No Built-in PoE • H.265/H.264 • 200MB Bandwidth Max • Resolution: 8MP/4K • HDMI (4K: 3840x2160)/VGA 1080P • 4 SATA up to 24TB • Audio I/O, 1CH/1CH, RCA • Alarm I/O: 16/4 • 10/100/1000M, 2 Network Port 	<ul style="list-style-type: none"> • 16CH 4K NVR • 16 Built-in PoE • H.265/H.264 • 200MB Bandwidth Max • Resolution: 8MP/4K • HDMI (4K: 3840x2160)/VGA 1080P • 4 SATA up to 24TB • Audio I/O, 1CH/1CH, RCA • Alarm I/O: 16/4 • 10/100/1000M, 1 Network Port
LTN6432	NVR-P32-16P-4VA	LTN6832	LTN6864-R	
<ul style="list-style-type: none"> • 32CH 4K NVR • No Built-in PoE • H.265/H.264 • 200MB Bandwidth Max • Resolution: 8MP/4K • HDMI (4K: 3840x2160)/VGA 1080P • 4 SATA up to 24TB • Audio I/O, 1CH/1CH, RCA • Alarm I/O: 16/4 • 10/100/1000M, 2 Network Port 	<ul style="list-style-type: none"> • 32CH 4K NVR • 16 Built-in PoE • H.265/H.264 • 200MB Bandwidth Max • Resolution: 8MP/4K • HDMI (4K: 3840x2160)/VGA 1080P • 4 SATA up to 24TB • Audio I/O, 1CH/1CH, RCA • Alarm I/O: 16/4 • 10/100/1000M, 1 Network Port 	<ul style="list-style-type: none"> • 32CH 4K NVR • No Built-in PoE • H.265/H.264 • 320Mbps Bandwidth Max • Resolution: 8MP/4K • 2 HDMI (4K: 3840x2160)/2 VGA 1080P • 8 SATA up to 80TB, 1 eSATA Port • Audio I/O, 1CH/1CH, RCA • Alarm I/O: 16/6 • 10/100/1000Mbps, 2 Network Port 	<ul style="list-style-type: none"> • 64CH 4K NVR • No Built-in PoE • H.265/H.264 • 384Mbps Bandwidth Max • Resolution: 8MP/4K • HDMI (4K: 3840x2160), 1 HDMI (4K: 3840x2160)/VGA 1080P • 8 SATA up to 64TB, 1 eSATA Port • Audio I/O, 1CH/1CH, RCA • Alarm I/O: 16/8 • RAID 0/1/5/10 • 10/100/1000Mbps, 2 Network Port 	

True Night Color

- Illuminate your nighttime image with brilliant True Night Color Technology
- See low-light environments in full color with reliable details like never before

TRUE NIGHT COLOR CAMERA

TRADITIONAL CAMERA

True Night Color IP Camera

LTDHIP3542W-28ISMLC LTDHIP3542W-36ISMLC	LTDHIP7542W-36MC	LTDHIP8542W-28MLC LTDHIP8542W-36MLC
<ul style="list-style-type: none"> • 4MP • H.265+ • 2688x1520@30fps • 2.8/3.6mm Fixed Lens • Color 0.02 Lux, BW 0 Lux, LED up to 66ft • WDR 140dB, 3D DNR, BLC, IP67 • PoE, Face Detection, SMD, Perimeter Protection, People Counting • MicroSD Slot up to 256GB • Built-in Mic 	<ul style="list-style-type: none"> • 4MP • H.265+ • 2688x1520@30fps • 3.6mm Fixed Lens • Color 0.02 Lux, BW 0 Lux • WDR 140dB, 3D DNR, BLC, IP67, IK10 • PoE, SMD, Face Detection, Perimeter Protection, People Counting • Audio I/O: 1/1, Alarm I/O: 1/1 • MicroSD Slot up to 256GB 	<ul style="list-style-type: none"> • 4MP • H.265+ • 2688x1520@30fps • 2.8/3.6mm Fixed Lens • Color 0.02 Lux, BW 0 Lux, LED up to 66ft • WDR 140dB, 3D DNR, BLC, IP67, IK10 • PoE, SMD, Face Detection, Perimeter Protection, People Counting • Audio I/O: 1/1, Alarm I/O: 1/1 • MicroSD Slot up to 256GB
Junction Box : PFA130-E Wall Mount : PFB204W	Junction Box : PFA137 Wall Mount : PFB203W	Junction Box : PFA130-E

SMD-Push Notification

Reduce False Alarms + Receive Instant Notifications

- Smart Motion Detection utilizes AI Deep Learning Algorithm by filtering out false alarms and providing precise human and vehicle detection
- Access instant push notifications for remote live view and playback

SMD IP Camera

LTDHIP3742W-28ISMD LTDHIP3742W-36ISMD	LTDHIP3942W-28ISMD	LTDHIP7742W-28MD LTDHIP7742W-36MD
<ul style="list-style-type: none"> • 4MP • H.265+ • 2688x1520@30fps • 2.8/3.6mm Fixed Lens • Color 0.05 Lux, BW 0 Lux, IR LED up to 165ft • WDR 120dB, 3D DNR, PoE • BLC, IP67, IK10 • 12V DC/PoE, Perimeter Protection, SMD • MicroSD Slot up to 256GB • Built-in Mic 	<ul style="list-style-type: none"> • 4MP • H.265+ • 2688x1520@30fps • 2.8mm Fixed Lens • Color 0.05 Lux, BW 0 Lux, IR LED up to 165ft • WDR 120dB, 3D DNR, PoE • BLC, IP67, IK10 • 12V DC/PoE, Perimeter Protection, SMD • MicroSD Slot up to 256GB • Built-in Mic 	<ul style="list-style-type: none"> • 4MP • H.265+ • 2688x1520@30fps • 2.8/3.6mm Fixed Lens • Color 0.05 Lux, BW 0 Lux, IR LED up to 165ft • WDR 120dB, 3D DNR, PoE • BLC, IP67, IK10 • 12V DC/PoE, Perimeter Protection, SMD • Audio I/O: 1/1, Alarm I/O: 1/1 • MicroSD Slot up to 256GB
Junction Box : PFA130-E Wall Mount : PFB203W	Junction Box : PFA139 Wall Mount : PFB204W	Junction Box : PFA136 Wall Mount : PFB203W

Starlight IP Camera 4MP

LTDHIP7642NW-28M	LTDHIP7642NW-36M	LTDHIP3642NW-28ISM	LTDHIP3642NW-36ISM
<ul style="list-style-type: none"> • 4MP • H.265+ • 2560x1440P@30fps • 2.8mm Fixed Lens • Color 0.008 Lux, BW 0 Lux • IR Range up to 98ft • WDR, PoE • IP67, IK10, General IVS • MicroSD Slot up to 256GB 	<ul style="list-style-type: none"> • 4MP • H.265+ • 2560x1440P@30fps • 3.6mm Fixed Lens • Color 0.008 Lux, BW 0 Lux • IR Range up to 98ft • WDR, PoE • IP67, IK10, General IVS • MicroSD Slot up to 256GB 	<ul style="list-style-type: none"> • 4MP • H.265+ • 2560x1440P@30fps • 2.8mm Fixed Lens • Color 0.008 Lux, BW 0 Lux • IR Range up to 98ft • WDR, PoE • IP67, General IVS • MicroSD Slot up to 256GB • Built-in Mic 	<ul style="list-style-type: none"> • 4MP • H.265+ • 2560x1440P@30fps • 3.6mm Fixed Lens • Color 0.008 Lux, BW 0 Lux • IR Range up to 98ft • WDR, PoE • IP67, General IVS • MicroSD Slot up to 256GB • Built-in Mic
Junction Box : PFA136 Wall Mount : PFB203W	Junction Box : PFA136 Wall Mount : PFB203W	Junction Box : PFA130-E Wall Mount : PFB203W	Junction Box : PFA130-E Wall Mount : PFB203W

Dual Lens

LTDHIP39222W-28ISM
<ul style="list-style-type: none"> • 2 x 2MP Dual Lens • H.265/H.264+ • 2 x 110° = Total Angle of View 220° • 1920x1080@30fps • 2.8 Fixed Lens • Color 0.09 Lux, 0.07 Lux, BW 0 Lux • IR Range up to 66ft • WDR, PoE • IP67, IK10 • MicroSD Slot up to 128GB • Built-in Mic
Junction Box : PFA137 Wall Mount : PFB203W



Starlight IP Camera 8MP









LTDHIP7682NW-28M	LTDHIP7682NW-36M	LTDHIP3682NW-28ISM	LTDHIP3682NW-36ISM
<ul style="list-style-type: none"> • 8MP/4K • H.265+ • 3840x2160@15fps • 2.8mm Fixed Lens • Color 0.009 Lux, BW 0 Lux • IR Range up to 98ft • WDR, PoE • IP67, IK10, General IVS • MicroSD Slot up to 256GB 	<ul style="list-style-type: none"> • 8MP/4K • H.265+ • 3840x2160@15fps • 3.6mm Fixed Lens • Color 0.009 Lux, BW 0 Lux • IR Range up to 98ft • WDR, PoE • IP67, IK10, General IVS • MicroSD Slot up to 256GB 	<ul style="list-style-type: none"> • 8MP/4K • H.265+ • 3840x2160@15fps • 2.8mm Fixed Lens • Color 0.009 Lux, BW 0 Lux • IR Range up to 98ft • WDR, PoE • IP67, General IVS • MicroSD Slot up to 256GB • Built-in Mic 	<ul style="list-style-type: none"> • 8MP/4K • H.265+ • 3840x2160@15fps • 3.6mm Fixed Lens • Color 0.009 Lux, BW 0 Lux • IR Range up to 98ft • WDR, PoE • IP67, General IVS • MicroSD Slot up to 256GB • Built-in Mic
Junction Box : PFA136 Wall Mount : PFB203W	Junction Box : PFA136 Wall Mount : PFB203W	Junction Box : PFA130-E Wall Mount : PFB203W	Junction Box : PFA130-E Wall Mount : PFB203W

Fixed Lens IP Camera

<p>LTDHIP3662W-28ISM / IP-6EB-F28-PAL LTDHIP3662W-36ISM / IP-6EB-F36-PAL</p>	<p>LTDHIP7662W-28M / IP-6DM-F28-PAL LTDHIP7662W-36M / IP-6DM-F36-PAL</p>	<p>LTDHIP8662W-28M LTDHIP8662W-36M</p>
		
		
<ul style="list-style-type: none"> • 6MP • H.265+ • 3072x2048@20fps • 2.8/3.6mm Fixed Lens • Color 0.04 Lux, BW 0 Lux • IR LED up to 164ft • True WDR 120dB, 3D DNR • BLC, IP67 • ePoE, IVS, Face Detection • MicroSD Slot up to 128GB • Built-in Mic 	<ul style="list-style-type: none"> • 6MP • H.265+ • 3072x2048@20fps • 2.8/3.6mm Fixed Lens • Color 0.04 Lux, BW 0 Lux • IR LED up to 98ft • True WDR 120dB, 3D DNR • BLC, IP67, IK10 • PoE, IVS, Face Detection • MicroSD Slot up to 128GB • Audio I/O: 1/1 • Alarm I/O: 1/1 	<ul style="list-style-type: none"> • 6MP • H.265+ • 3072x2048@20fps • 2.8/3.6mm Fixed Lens • Color 0.04 Lux, BW 0 Lux • IR LED up to 131ft • True WDR 120dB, 3D DNR • BLC, IP67 • ePoE, IVS • MicroSD Slot up to 128GB
<p>Junction Box : PFA130-E Wall Mount : PFB204W</p>	<p>Junction Box : PFA136 Wall Mount : PFB203W</p>	<p>Junction Box : PFA130-E</p>










<p>IP-8EB-F28-PAL LTDHIP3682W-4ISM / IP-8EB-F40-PAL</p>	<p>IP-8DM-F40-PAL</p>	<p>IP-8BL-F40-PBL</p>
		
		
<ul style="list-style-type: none"> • 8MP/4K • H.265+ • 3840x2160@15fps • 2.8/4.0mm Fixed Lens • Color 0.06 Lux, BW 0 Lux • IR Range up to 164ft • True WDR 120dB, 3D DNR • BLC, IP67 • ePoE, IVS, Face Detection • MicroSD Slot 128GB • Built-in Mic 	<ul style="list-style-type: none"> • 8MP/4K • H.265+ • 3840x2160@15fps • 4.0mm Fixed Lens • Color 0.06 Lux, BW 0 Lux • IR Range up to 98ft • True WDR 120dB, 3D DNR • BLC, IP67, IK10 • ePoE, IVS, Face Detection • MicroSD Slot up to 128GB • Audio I/O: 1/1 • Alarm I/O: 1/1 	<ul style="list-style-type: none"> • 8MP/4K • H.265+ • 3840x2160@15fps • 4.0mm Fixed Lens • Color 0.06 Lux, BW 0 Lux • IR Range up to 131ft • True WDR 120dB, 3D DNR • BLC, IP67 • ePoE, IVS, Face Detection • MicroSD Slot up to 128GB
<p>Junction Box : PFA130-E Wall Mount : PFB204W</p>	<p>Junction Box : PFA136 Wall Mount : PFB203W</p>	<p>Junction Box : PFA130-E</p>
















Accessories

<p>PFA13A-E</p> 	<p>PFA136</p> 	<p>PFA134</p> 	<p>PFA130-E</p> 	<p>PFA137</p> 	<p>PFA139</p> 	<p>PFB203W</p> 	<p>PFB204W</p> 
<p>Junction Box for LTDHIP266XX, LTDHCT36XX</p>	<p>Junction Box for LTDHIP76XX, LTDHCD76XX</p>	<p>Junction Box for LTDHIP8652W-36, LTDHCR66XX</p>	<p>Junction Box for LTDHIP8682, 8662, 3682, 3662, 3252, DHCT3642</p>	<p>Junction Box for LTDHIP39222W, LTDHIP75XXW</p>	<p>Junction Box for LTDHIP3942W</p>	<p>Wall Mount Bracket for LTDHIP76XX, LTDHIP36XX, LTDHIP32XX, LTCD76XX</p>	<p>Wall Mount Bracket for LTDHIP36XX, LTDHCT36XX, LTDHCT26XX</p>




■ Penta-Brid Digital Video Recorder


LTD3104C-PL	LTD3108C-PL PVR-P8-1VC	LTD3216C-PL
		
 	 	 
<ul style="list-style-type: none"> • 4CH Penta Brid DVR • H.265+ • 24Mbps Bandwidth Max • Resolution: 4M-N/1080P • 4CH Analog + 2CH IP • 15fps@1080P • Max IP Resolution: 6MP • CVI/TVI/AHD/Analog Video Input • 1 SATA up to 10TB • Alarm Over Coaxial • 100M, 1 Network Port 	<ul style="list-style-type: none"> • 8CH Penta Brid DVR • H.265+ • 48Mbps Bandwidth Max • Resolution: 4M-N/1080P • 8CH Analog + 4CH IP • 15fps@1080P • Max IP Resolution: 6MP • CVI/TVI/AHD/Analog Video Input • 1 SATA up to 10TB • Alarm Over Coaxial • 100M, 1 Network Port 	<ul style="list-style-type: none"> • 16CH Penta Brid DVR • H.265+ • 200MB Bandwidth Max • Resolution: 4M-N/1080P • 16CH Analog + 8CH IP • 15fps@1080P • Max IP Resolution: 6MP • CVI/TVI/AHD/Analog Video Input • 2 SATA up to 20TB • Alarm Over Coaxial • 100M, 1 Network Port

LTD5104C-KL	LTD5208K-KL	LTD5216K-KL	LTD5432K-KL
			
  	  	  	 
<ul style="list-style-type: none"> • 4CH 4K Penta Brid DVR • H.265+ • 24Mbps Bandwidth Max • Resolution: 8MP/4K • 4CH Analog + 2CH IP • 30fps@1080P, 15fps@4MP • Max IP Resolution: 8MP • CVI/TVI/AHD/Analog Video Input • 1 SATA up to 10TB • Alarm Over Coaxial • 100M, 1 Network Port 	<ul style="list-style-type: none"> • 8CH 4K Penta Brid DVR • H.265+ • 48Mbps Bandwidth Max • Resolution: 8MP/4K • 8CH Analog + 4CH IP • 30fps@1080P, 15fps@4MP • Max IP Resolution: 8MP • CVI/TVI/AHD/Analog Video Input • 2 SATA up to 20TB • Alarm Over Coaxial • 1000M, 1 Network Port 	<ul style="list-style-type: none"> • 16CH Penta Brid DVR • H.265+ • 96Mbps Bandwidth Max • Resolution: 8MP/4K • 16CH Analog/8CH IP • 30fps@1080P, 12fps@5MP • Max IP Resolution: 8MP • CVI/TVI/AHD/Analog Video Input • 2 SATA up to 20TB • Alarm Over Coaxial • 1000M, 1 Network Port 	<ul style="list-style-type: none"> • 32CH Penta Brid DVR • H.265+ • 128Mbps Bandwidth Max • Resolution: 5MP • 32CH Analog/32CH IP Adjustable • 30fps@1080P, 12fps@5MP • Max IP Resolution: 8MP • CVI/TVI/AHD/Analog Video Input • 4 SATA up to 40TB • Alarm I/O: 16/6 • 1000M, 1 Network Port

True Night Color HD-CVI Camera



Traditional IR Camera



True Night Color Camera

Monitor low-light environments in full color details



LTDHCR6622W-36ISCF	LTDHCT3622W-36ISCF	LTDHCR6652W-36ISCF	LTDHCT3652W-36ISCF
<ul style="list-style-type: none"> • 2MP • 1920x1080P@30fps, 3.6mm Fixed Lens • Color 0.005 Lux, BW 0 Lux, LED up to 66ft • WDR, 2D DNR, BLC, IP67, DC 12V • Built-in Mic 	<ul style="list-style-type: none"> • 2MP • 1920x1080P@30fps, 3.6mm Fixed Lens • Color 0.005 Lux, BW 0 Lux, LED up to 130ft • WDR, 2D DNR, BLC, IP67, DC 12V • Built-in Mic 	<ul style="list-style-type: none"> • 5MP • 2592x1944P@20fps, 3.6mm Fixed Lens • Color 0.005 Lux, BW 0 Lux, LED up to 66ft • WDR, 2D DNR, BLC, IP67, DC 12V • Built-in Mic 	<ul style="list-style-type: none"> • 5MP • 2592x1944P@20fps, 3.6mm Fixed Lens • Color 0.005 Lux, BW 0 Lux, LED up to 130ft • WDR, 2D DNR, BLC, IP67, DC 12V • Built-in Mic
Junction Box : PFA134	Junction Box : PFA130-E Wall Mount : PFB204W	Junction Box : PFA134	Junction Box : PFA130-E Wall Mount : PFB204W

Fixed Lens HD-CVI Camera


LTDHCR6642-28 LTDHCR6642-36	HC-2DM-F28-SAL	HC-4EB-F28-SBL	HC-4EB-F28-SAL HC-4EB-F36-SAL
<ul style="list-style-type: none"> • 4MP • 2560x1440P@30fps • 2.8/3.6mm Fixed Lens • Color 0.03 Lux, BW 0 Lux • IR LED up to 66ft • CVI/Analog • DWDR, 2D DNR, BLC • IP67, DC 12V • 33ft Passive Infrared 	<ul style="list-style-type: none"> • 2MP • 1920x1080P@30fps • 2.8mm Fixed Lens • Color 0.02 Lux, BW 0 Lux • IR Range up to 98ft • CVI/TVI/AHD/Analog • DWDR, 2D DNR, BLC • IP67, IK10 • DC 12V • Dual Video Switchable 	<ul style="list-style-type: none"> • 4MP • 2560x1440P@30fps • 2.8mm Fixed Lens • Color 0.03 Lux, BW 0 Lux • IR Range up to 164ft • CVI/Analog • DWDR, 2D DNR, BLC • IP67 • DC 12V, Dual Video Switchable 	<ul style="list-style-type: none"> • 4MP • 2560x1440P@30fps • 2.8/3.6mm Fixed Lens • Color 0.03 Lux, BW 0 Lux • IR Range up to 98ft • CVI/Analog • DWDR, 2D DNR, BLC, IP67 • DC 12V, Dual Video Switchable
Junction Box : PFA134	Junction Box : PFA136 Wall Mount : PFB203W	Junction Box : PFA130-E Wall Mount : PFB204W	Junction Box : PFA130-E Wall Mount : PFB204W

Smart Phone Connectivity

- Easy P2P
- Supports push notification
- Multi-user with different permission levels



Solution 1: Wrist Temperature Measurement with Facial Terminal

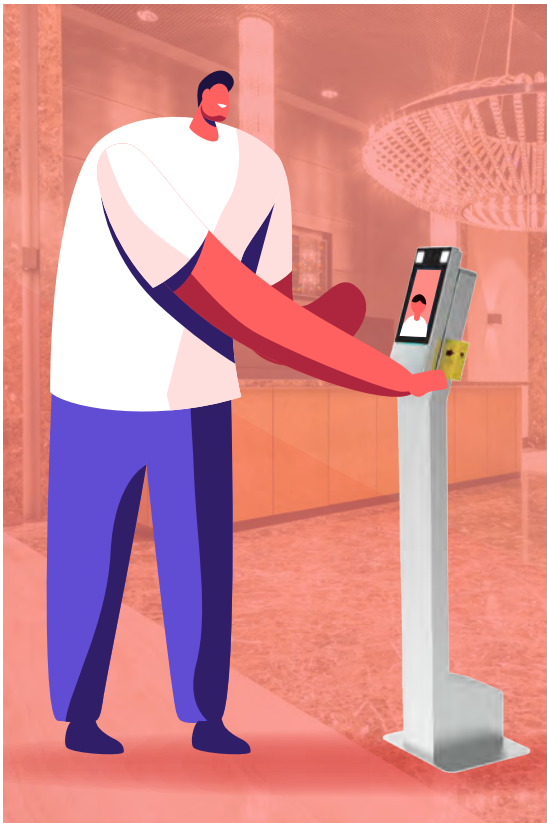

LTK-WRISTKIT	
	<p>Ensure Staff Health and Security with Contactless Wrist Temperature Measurement Module, along with Customizable Facial Detection and Temperature Alerts</p> <ul style="list-style-type: none"> • Main Terminal <ul style="list-style-type: none"> • Realtime Temperature and Face Mask Alerts • Abnormal Body Temperature Alert • 7" Touchscreen • Local Offline Recognition Supported • Facial Detection Time within 0.2s • Web Interface and PC Software • Wrist Temperature Module <ul style="list-style-type: none"> • Touchless Detection from Wrist • Temperature Range 86°F to 113°F • Measurement Deviation $\leq 0.9^\circ\text{F}$ • Measurement Distance: 3/8 inch to 1-1/2 inch • Floor Stand <ul style="list-style-type: none"> • 45.6" x 4.7" x 1.1" Stand • 11.0" x 8.7" Base • Stainless Steel • Weight: 15 lb




Solution 2: Forehead Temperature Measurement with Facial Terminal



LTK3607FM-T	LTK3607-FLOOR
<ul style="list-style-type: none"> • Realtime Temperature and Face Mask Alerts • Abnormal Body Temperature Alert • Forehead Temperature Module and 7" Touchscreen • Local Offline Recognition Supported • Detect Face and Measure Temperature within 0.2s • Temperature Range 86°F to 113°F • Measurement Deviation $\leq 0.9^\circ\text{F}$ • Measurement Distance: 1 to 6 ft • Temperature Measurement Version PC Software 	<ul style="list-style-type: none"> • Floor Stand for LTK3607FM-T or LTK3607FM • 52.8" x 8.9" x 3.9" Stand • 4 Bolts Securing the Stand to the Ground • SPCC Steel • Weight 14.8 lb • Power, Network and Data Wires Included and Pre-Fished • Optional Wiring Holes on Its Back and Bottom

During COVID-19 period, telethermographic systems may be marketed to the general public for general, non-medical purposes. Because they are not intended for use in the diagnosis of disease or other conditions or in the cure, mitigation, treatment, or prevention of disease, when marketed for these non-medical applications, FDA device marketing authorization is not required, and all the other medical device requirements of the FD&C Act do not apply to manufacturers, importers, and distributors of these products. Learn more at www.fda.gov/media/137079/download

Intercom Single-Unit Outdoor Station

IP Intercom: LTH-301M-WIFI	IP/2-Wire: LTH-M201-C(-2)	Surface/Flush Mount: LTH-M201-1S/F
		
OR		
<ul style="list-style-type: none"> • 2nd Gen Door Station with True WDR 2MP IPC • Compact 4.7" x 2.2" x 0.8" Design • Mifare Reader and Programmable Calling Button • PoE or TCP/IP with DC12V, IP65 Outdoor 	<ul style="list-style-type: none"> • IP or 2-Wire 2MP 180° Wide Angle Door Station • Adding Indoor Station allows APP Access • Ideal for Offices, Houses and Stores • Power & Data from a Single Cable • Add LTH-M201-FL for Flush Mount 	



Intercom Multi-Unit Outdoor Station

With Calling Buttons



IP/2-Wire: LTH-M201-C(-2)	Nametag Module: LTH-M201-6B
Surface/Flush Mount: LTH-M201-2S/2F	
<ul style="list-style-type: none"> • IP or 2-Wire 2MP 180° Wide Angle Door Station • Supports up to 500 Apartment Units • Call Residents with Nametag Buttons • Adding Indoor Station allows APP Access • Power & Data from a Single Cable • Add LTH-M201-FL for Flush Mount 	

With RFID Reader and Physical Keypad




IP/2-Wire: LTH-M201-C(-2)	Keypad Module: LTH-M201-KP
Mifare Card Reader: LTH-M201-MCR	Surface/Flush Mount: LTH-M201-3S/3F
<ul style="list-style-type: none"> • IP or 2-Wire 2MP 180° Wide Angle Door Station • Supports up to 500 Apartment Units • Card, Keyfob and Code Entry Supported • Call Residents with Physical Keypad • Adding Indoor Station allows APP Access • Power & Data from a Single Cable • Add LTH-M201-FL for Flush Mount 	






With Facial Recognition Cameras, RFID and Digital Keypad

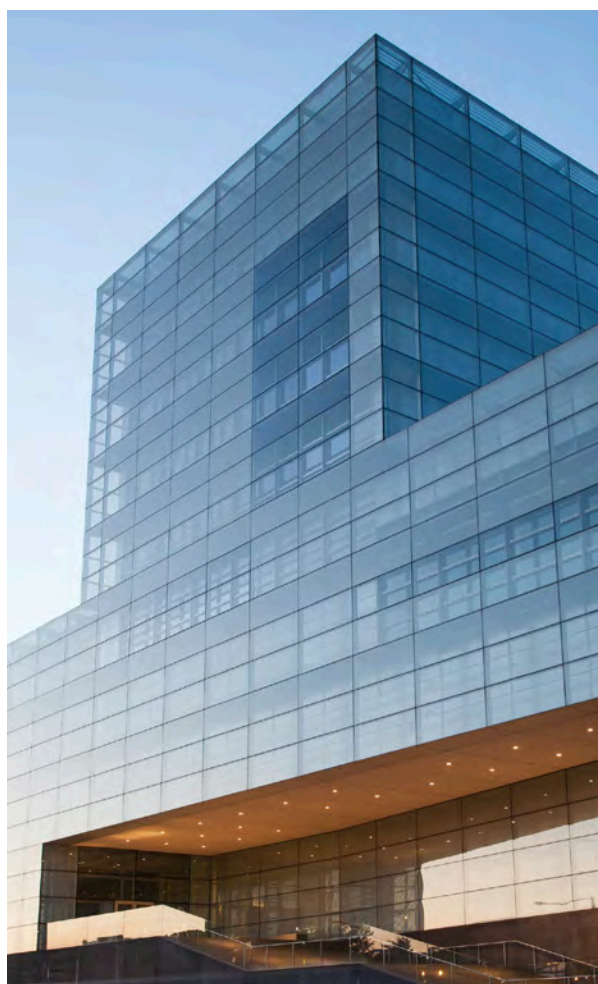

IP Intercom: LTK3607FM
<ul style="list-style-type: none"> • 2MP Dual Lens Camera Door Station • Supports up to 500 apartment units • Facial, Card and Keyfob Entry Supported • Call Residents with 7" Touchscreen Digital Keypad • Add Indoor Station for APP Access • TCP/IP and Wi-Fi, DC12V • Enable PoE with LTK-AQE30E • Full Size 9.41" x 4.59" x 1.30" • Ideal for Apartments, Childcare/Nursing Facilities, etc.



IP and 2-Wire Indoor Stations and 2-Wire Power Distributor

LTH-D310-WIFI	LTH-D301GY-WIFI	LTH-D301GY-WIFI-2	LTH-MD06-2	LTAC1802G-CMR
				
<ul style="list-style-type: none"> • 7" Touch Screen • Supports Android App Installation • Built-in LTS Connect App • All-in-One Mobile Management • Manage from NVMS V3 PC • Allows Door Station APP Access • PoE, DC12V, Wi-Fi • Up to 6 per Apartment Unit 	<ul style="list-style-type: none"> • IP Video Indoor Station • Configure with 7" Touch Screen • Manage from NVMS V3 PC • Allows Door Station APP Access • PoE, DC12V, Wi-Fi • Up to 6 per Apartment Unit 	<ul style="list-style-type: none"> • 2-Wire Video Indoor Station • Configure with 7" Touch Screen • Manage from NVMS V3 PC • Allows Door Station APP Access • Power & Network from MD06-2 • Up to 6 per Apartment Unit 	<ul style="list-style-type: none"> • 6-ch 2-Wire Power Distributor • Provides Power and Network • Up to 6 indoor/outdoor stations • 24V DC Adaptor Included • Surface Mount Bracket Included 	<ul style="list-style-type: none"> • LTS 18/2 Access Control Cable • 18 AWG, 2 Wires, 1000ft • For Access Control or Intercom • Stranded, Unstranded, CMR Rated

Customize Your Own Door Terminal
 From Station Component List Below
 - LTS 2-Wire Stations Compatible with LTS IP Systems, and Vice Versa
 - IP and 2-Wire Stations are IP-Based, Using Different Cables

All-in-One Door Stations

LTH-301M-WIFI	LTK3410MF	LTK3607FM
Compact Gen 2 Single-Unit Door Station	Compact Multi-Unit Outdoor Station with Touchscreen *PS120V2000 12VDC 2A Power Supply Included	Multi-Unit Outdoor Station with Touchscreen *PS120V2000 12VDC 2A Power Supply Included

Modular Door Stations

LTH-M201-C	LTH-M201-C-2	LTH-M201-KP	LTH-M201-6B	LTH-M201-6B-C	LTH-M201-MCR
IP Door Station Module	2-Wire Door Station Module	Keypad Module	6 Button Name Tag Module	Cover for Unused Buttons	Mifare Card Reader Module

Brackets for Modular Door Stations

LTH-M201-1S	LTH-M201-2S	LTH-M201-3S	LTH-M201-1F	LTH-M201-2F	LTH-M201-3F	LTH-M201-FL
Surface Mount, 1 Module	Surface Mount, 2 Module	Surface Mount, 3 Module	Flush Mount, 1 Module	Flush Mount, 2 Module	Flush Mount, 3 Module	Secures Flush Mounts *Free with 1F/2F/3F Bracket

LTS Intercom
 Supports up to 500 Apartment Units

Answer & Unlock via Mobile App Remotely
 Manage Intercom, Access Control and Surveillance with NVMS V3

Indoor Stations and 2-Wire Power Distributor

LTH-D310-WIFI	LTH-D301GY-WIFI	LTH-D301GY-WIFI-2	LTH-MD06-2	LTH-D301-DESK
IP Android Indoor Station	IP Indoor Station	2-Wire Door Indoor Station	2-Wire Power Distributor	Desk Stand for D301GY

Management Software Options

NVMS V3 PC Software + LTS Connect APP	XVMS-8D00R-8CAM Server/Client Software + X-VMS APP	LTKE100ME
<ul style="list-style-type: none"> • Manage Surveillance, Access Control and Intercom • Only 1 PC for Access Control Purposes • LTS Connect APP Supports Single Door Controllers and Intercom • LTS Connect APP can Answer and Unlock Doors • Supports up to 256 Video and 64 Door Channels • Time Attendance, E-Map 	<ul style="list-style-type: none"> • VMS for LTS Surveillance and Access Control • Supports Multiple Users from Computers and Smartphones • Controls Multi-Door+Single Door Controllers and Intercom • Operate Your Entrances from X-VMS APP Remotely • Supports up to 8 Video and 8 Door Channels • Web for Configuration; Software for Operation 	<ul style="list-style-type: none"> • LTS Mifare USB Issuer Work with PC Softwares • Supports both NVMS and X-VMS • Easy Enrolling Cards at Client PC, UL Listed

Single-Door Controller

PoE Extractor for Easy Cabling

LTK3410MF	LTK3607FM	LTK-AQE30E
<p>*PS120V2000 12VDC 2A Power Supply Included</p>	<p>*PS120V2000 12VDC 2A Power Supply Included</p>	
<ul style="list-style-type: none"> • LTS 1 Door Facial Recognition Intercom/AC Terminal with 2MP IPC • 4-inch LCD Touch Screen can call Software or Indoor Stations • Build-in Mifare Card Reader • Up to 1500 Profiles with a Face and/or a Mifare Card • TCP/IP and Wi-Fi, DC 12V, IP 65 Outdoor • Can Program from Software or its Touch Screen • Compact 6.79" x 3.27" x 0.89" design 	<ul style="list-style-type: none"> • LTS 1 Door Facial Recognition Intercom/AC Terminal with 2MP IPC • 7-inch LCD Touch Screen can call Software or Indoor Stations • Build-in Mifare Card Reader • Up to 6,000 Profiles with a Face and/or a Mifare Card • TCP/IP and Wi-Fi, DC 12V, IP 65 Outdoor • Can Program from Software or its Touch Screen • Full Size 9.41" x 4.59" x 1.30" 	<ul style="list-style-type: none"> • Securitron 12VDC 1A/2A Selectable PoE Extractor • PoE in, Data and DC12V 1/2A out • Can Power 1 Single-Door Controller and 1 HES Strike • UL294B Listed

Multi-Door Controller

Card Readers for LTS Controllers

LTK2802	LTK2804	LTK1101M	LTK1101MK	LTK1107M	LTK1107MK	LTK1104M	LTK1104MK
<ul style="list-style-type: none"> • LTS 2/4 Door Controller • Secure Metal Closure with Key Cylinder • Supports 4 Wiegand 26/34 bit Readers • Up to 10,000 Cards and 50,000 Events • Build-in 12VDC 8.5A Power Supply • Add X-VMS for App Access 		<ul style="list-style-type: none"> • LTS Single Gang Reader • Wiegand 26/34 Selectable • Mifare Classic • IP 64 Weatherproof • -K Model Comes with Keypad 		<ul style="list-style-type: none"> • LTS Slim Reader • Wiegand 26/34 Selectable • Mifare Classic • IP 65 Weatherproof • -K Model Comes with Keypad 		<ul style="list-style-type: none"> • LTS Vandal-Proof Reader • Wiegand 26/34 Selectable • Mifare Classic • IP 65 Weatherproof • IK10, Metal Housing • -K Model Comes with Keypad 	

Mifare Credentials

Cable for Access Control

LTK1356M	LTKF1356M	LTKF1356M-T
LTS Mifare Card	LTS Mifare Slim Key Fob	LTS Mifare Round Key Fob
<ul style="list-style-type: none"> • 13.56 Mifare Classic • 8 Digit and 10 Digit # Printed 		

LTAC1802G-CMR	LTAC1806G-CMR	LTAC1822Y-CMR
<ul style="list-style-type: none"> • LTS 18/2 Access Control Cable • 18 AWG, 2 Wires, 1000ft • For Access Control or Intercom • Stranded, Unstranded, CMR Rated 	<ul style="list-style-type: none"> • LTS 18/6 Reader Cable 500ft • 18 AWG, 6 Wire • Shielded, Stranded • ETL and CMR Rated 	<ul style="list-style-type: none"> • LTS Banana-Peel Cable 500ft • 18/4 for Lock Power Circuit • 22/2 and 22/4 for Exit Devices • Shield 22/6 for Reader

Alarm Controls and Securitron Maglocks and Accessories

LTK-600S	LTK-1200S	LTK-600L	LTK-1200L	LTK-600D	LTK-1200D	LTK-600WP	LTK-1200WP
<ul style="list-style-type: none"> Alarm Controls Maglock 600lb / 1200lb Holding Force, UL294 and UL10C Add AM3370 / AM6370 if Door Opens Inwards 		<ul style="list-style-type: none"> Alarm Controls Maglock with Red LED indicator 600lb / 1200lb Holding Force, UL294 and UL10C Add AM3370 / AM6370 if Door Opens Inwards 		<ul style="list-style-type: none"> Alarm Controls Double Door Maglock 600lb / 1200lb Holding Force, UL294 and UL10C Add AM3370 / AM6370 if Door Opens Inwards 		<ul style="list-style-type: none"> Alarm Controls Water-proof Maglock 600lb / 1200lb, Swinging or Sliding Gate Add AM3370 / AM6370 as Gate Bracket 	

LTK-AM3370(C)	LTK-AM6370(C)	LTK-AM3300	LTK-AM6300	LTK-GDH	LTK-SAM
<ul style="list-style-type: none"> Alarm Controls LZ Bracket ("C" Dress Cover) For Mounting onto Inward Swinging Doors AM3370(C) for 600 / AM6370(C) for 1200 Series 		<ul style="list-style-type: none"> Alarm Controls Drop Down Plates on Single Locks For Dropping 1/2" to Clear the Door Frame AM3300 for 600 and AM6300 for 1200 Series 		<ul style="list-style-type: none"> Alarm Controls Glass Door Holder Secure Armature Plate on Frameless Glass Door Work with All 600 and 1200 Series Maglocks 	<ul style="list-style-type: none"> Securitron SAM - Shear Aligning Maglock 1200lb Holding Force, UL294 and UL10C Ideal for Swing-Through and Sliding Doors

Add Two Means of Egress and a Certified Power Supply to Your Maglock Installation

LTK-TS-2	LTK-TS-2-2	LTK-TS-2T	LTK-EEB-3N	LTK-NTS-1	LTK-TS-14	LTK-TS-60
<ul style="list-style-type: none"> Alarm Controls Green Push Button 2" SQ Illuminated "Push to Exit" UL294 Listed TS-2 is SPDT; TS-2-2 is DPDT TS-2T is SPDT with 2-45s Timer 			<ul style="list-style-type: none"> Securitron Narrow Stile Push Button Switchable Green and Red Lenses Both Lenses Included UL294 Listed SPDT with 30s Timer 	<ul style="list-style-type: none"> Alarm Control No Touch Sensor with 1-35s Timer Single Gang Stainless Steel Wall Plate, SPDT 	<ul style="list-style-type: none"> Alarm Control Push Button with 2-60s Pneumatic Timer 1.5" Green or 2.5" Red Mushroom Button "Push To Exit" UL294 Listed SPDT 	

LTK-SREX-100	LTK-XMS	LTK-REB-1	LTK-REB-1A	LTK-TS-18
<ul style="list-style-type: none"> Alarm Controls REX Motion Sensor DPDT, UL294 Listed, 3 Years Warranty 	<ul style="list-style-type: none"> Securitron Exit Motion Sensor UL294 Listed, Lifetime Warranty 	<ul style="list-style-type: none"> Alarm Controls Pushbar & Door Loop DPDT 34.5" Pushbar, 18" Door Loop Included 		<ul style="list-style-type: none"> Alarm Control Push Button Release 1 H x 1-1/2" W x 2" L, UL 636 Listed CSA Certified






Get a Certified Power Supply that Can Integrate with Fire Alarm

LTK-AQD4-4C1R1	LTK-AQD6-8F8R2	LTK-AQL6-B100R8E1	LTK-AQS1216-16F16R2
12 or 24VDC 4A with 4 PTC Output	12 or 24VDC 6A with 8 Fuse Output	12 and 24VDC 6A with 8 Fuse Output	12VDC 16A with 16 Fuse Output
<ul style="list-style-type: none"> Securitron AQ Series Power Supply with MagnaCare® Lifetime Replacement, No Fault Warranty Protected Outputs with Alarm Interface, Cuts Off Power of Maglocks from the Source when Fire Alarm Triggered UL294, UL603, ULC-S318, ULC-S533 Listed RoHS Compliant and REACH Compliant 			

*All ASSA ABLOY ESH Products, including HES, Securitron, Adams Rite and Alarm Controls products are available to order through LTS.

Select Electrical Strikes According to Existing Door Hardware




Electrical Strike for Cylindrical Latch

LTK-5000C	LTK-8000C	LTK-AES-300-12	LTK-AES-300-24	LTK-7400-628
				
<ul style="list-style-type: none"> • HES 5000 Strike with 501 and 501A Face Plates • ANSI Metal Jambos or Aluminum Frames • Dual Voltage 12V/24V DC/AC • UL1034, UL294 Listed 	<ul style="list-style-type: none"> • HES 8000 Strike with 801 and 801A Face Plates • Easy Installation, No Cutting on ANSI Frames • Dual Voltage 12V/24V DC/AC • UL1034, UL294 Listed 	<ul style="list-style-type: none"> • Alarm Controls AES-300 Strike • All Face Plates Included • Ultra Compact for Minimum Wood Frame Cutting • LTK-AES-300-12: 12VDC/AC • LTK-AES-300-24: 24VDC/AC • UL1034 Listed 	<ul style="list-style-type: none"> • Adams Rite 7400 Strike • Handles Up to 25lb Preload • Handles Up to 25lb Pressure Exerted on Doors • 12V/24V DC • UL1034, UL294 Listed 	

For Mortise Latch



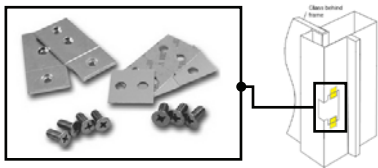

Most Versatile

Add Mounting Tabs for Storefront

LTK-1500C	LTK-1600CS	LTK-152
		
<ul style="list-style-type: none"> • HES 1500 Strike with 1J, 1K, 1KD and 1KM Face Plates • Stainless Steel Construction with 10-Year No-Fault Warranty • Dual Voltage 12V/24V DC/AC • UL294, UL10C 3 Hours 	<ul style="list-style-type: none"> • HES 1600 Strike with Multiple Face Plates and Deadbolt Brackets • Accommodates Every Lock Designed for 4-7/8" Strike Plate • Dual Voltage 12V/24V DC/AC • UL294, UL10C 3 Hours 	<ul style="list-style-type: none"> • HES 152: Universal Mounting Tabs • Mount Inside Hollow Metal and Aluminum Jambos • Compatible with 5000, 8000, 7400, 1500, 1600 and More

For RIM Exit Devices (Push Bar)

For Sliding and Swinging Gates

LTK-9400	LTK-9600	LTK-9500	LTK-GL1-FL
			
<ul style="list-style-type: none"> • HES 9000 Series Slim-Line Strike • Surface Mounted, No Cutting Needed 	<ul style="list-style-type: none"> • For 3/4" Pullman Latch • UL294 Listed 	<ul style="list-style-type: none"> • For 3/4" Pullman Latch • UL294, UL10C 3 Hours 	<ul style="list-style-type: none"> • Securitron Heavy Duty, Weather-Resistant Gate Lock • 2000lb Holding Force • Up to 100lb Pre-Load with Key Backup • LTK-FMK-SL (Slide) and LTK-FMK-SW (Swing) Brackets Available • Optional Key Cylinder LTK-GMC Available

Wireless Unlock for Any Electrified Openings

Optional Buzzer

HES Strike Metal Template Kit

LTK-RT-1	LTK-RT-3	LTK-PA-100	LTK-HESCUT-MTK
			
<ul style="list-style-type: none"> • Alarm Controls 1 Door Receiver-Transmitter Kit • Additional LTK-RT-1T and LTK-RT-1TW • 1 Receiver with 2 Transmitter Kit 	<ul style="list-style-type: none"> • Alarm Controls 3 Doors Receiver-Transmitter Kit • Additional LTK-RT-1TW • 3 Receivers with 1 Transmitter Kit 	<ul style="list-style-type: none"> • Alarm Controls PA-100 Piezo Buzzer • Sound Level 90 dB • Continuous Tone • Operates on 3-24 VDC • Available Pre-Mounted on Wall Plate (LTK-TS-34) 	LTK-9000-MTK
			

*All ASSA ABLOY ESH Products, including HES, Securitron, Adams Rite and Alarm Controls products are available to order through LTS.



Free Access Control and Intercom Consultation Service

Our team of experts is ready to answer your questions and guide you through everything related to intercom and access control installation, including:

- System Design
- Hardware Selection
- Software Guidance
- Wiring Instruction and more!

Send photos of your door, door frame, and existing lock to your LTS sales representative, and we give our recommendations tailored to your needs.

Battery Powered Smart Locks for Commercial Interior Doors or Residential Homes

LTK-UL1 (Silver -SN / Black -BK)	LTK-UBOLT (Silver -SN / Black -BK)	LTK-UBOLT-PRO	LTK-UB01
<ul style="list-style-type: none"> • Unlock via Fingerprint, Keyfob or APP • Replaces Cylindrical Deadbolts • LTK-COMBO-SN/BK-UB01 Kit Available • 4 AA Batteries Last up to 8000 Entries 	<ul style="list-style-type: none"> • Unlock via Code, APP or Physical Key • Replaces Cylindrical Deadbolts • Physical Key Backup Included • LTK-UBOLT-SN/BK-UB01 Kit Available 	<ul style="list-style-type: none"> • Unlock via FP, Code, APP or Key • Replaces Cylindrical Deadbolts • Physical Key Backup Included • LTK-UBOLT-PRO-UB01 Kit Available 	<ul style="list-style-type: none"> • Bluetooth Wi-Fi Bridge for UltraLoq • Allow Remote Access to Smart Locks • Plug Near the Smart Lock • Alexa, Google Home and IFTTT

Exit Buttons

Compact Exit Buttons

Motion REX

LTKB2	LTKB4LED	LTKB04	LTKREX-W	LTKREX-B
<ul style="list-style-type: none"> • LTS 1 Gang Exit • SPDT (NO/NC) • 1 Gang 	<ul style="list-style-type: none"> • LTS Touchless Exit • SPDT (NO/NC) • 1 Gang, 1-25s Timer 	<ul style="list-style-type: none"> • LTS Touchless Exit • Aluminum Alloy • 3.39" x 1.97" x 1.34" 	<ul style="list-style-type: none"> • LTS Motion RTE Motion Sensor • SPST, NC Only, DC12V • LTKREX-W white and LTKREX-B Black • Wide Angle Activation Range 	

Programming & Design

PROFESSIONAL CONSULTING AVAILABLE FOR airMAX®

airMAX®







Starting from \$25, Call your rep for details









SERVICE CODE :
UBNT-SERVICE

airMAX® WIRELESS






NanoBeam / LiteBeam / PowerBeam

UBNT-NBE-M5-16	UBNT-NBE-M5-19	UBNT-NBE-5AC-GEN2	UBNT-LBE-5AC-GEN2	UBNT-LAP-120-US	UBNT-PBE-5AC-GEN2
					
5 GHz NanoBeam M5 <ul style="list-style-type: none"> • 16dBi, 150+ Mbps, 10+ km • (1) 10/100 Ethernet Port • 35° Beamwidth • 24V, 0.2A PoE Adapter Included 	5 GHz NanoBeam M5 <ul style="list-style-type: none"> • 19dBi, 150+ Mbps, 15+ km • (1) 10/100 Ethernet Port • 25° Beamwidth • 24V, 0.2A PoE Adapter Included 	5 GHz NanoBeam AC, Gen2 <ul style="list-style-type: none"> • 19dBi, 450+ Mbps, 15+ km • (2) 10/100/1000 Ethernet Ports • Wi-Fi for Management • 15° Beamwidth • 24V, 0.5A Gigabit PoE Adapter Included 	5 GHz LiteBeam AC, Gen2 <ul style="list-style-type: none"> • 23dBi, 450+ Mbps, 10+ km • (1) 10/100/1000 Ethernet Port • 15° Beamwidth • 24V, 0.3A Gigabit PoE Adapter Included 	5 GHz LiteBeam AC AP, 120° <ul style="list-style-type: none"> • 16dBi, 450+ Mbps, 10+ km • (1) 10/100/1000 Ethernet Port • 15° Beamwidth • 24V, 0.5A Gigabit PoE Adapter Included 	5 GHz PowerBeam AC, Gen2 <ul style="list-style-type: none"> • 25dBi, 450+ Mbps, 25+ km • (1) 10/100/1000 Ethernet Port • 15° Beamwidth • 24V, 0.5A Gigabit PoE Adapter Included






NanoStation

UBNT-LOCOM2-US	UBNT-LOCOM5-US	UBNT-NSM2	UBNT-NSM5	UBNT-NS-5AC-US	UBNT-NS-WM
					
2.4 GHz NanoStation LocoM2 <ul style="list-style-type: none"> • 8.5dBi, 150+ Mbps, 5+ km • (1) 10/100 Ethernet Port • 60° Beamwidth • 24V, 0.2A PoE Adapter Included 	5 GHz NanoStation LocoM5 <ul style="list-style-type: none"> • 13dBi, 150+ Mbps, 10+ km • (1) 10/100 Ethernet Port • 45° Beamwidth • 24V, 0.2A PoE Adapter Included 	2.4 GHz NanoStation M2 <ul style="list-style-type: none"> • 11dBi, 150+ Mbps, 13+ km • (2) 10/100 Ethernet Ports • 55° Beamwidth • 24V, 0.2A PoE Adapter Included 	5 GHz NanoStation M5 <ul style="list-style-type: none"> • 14.6-16.1dBi, 150+ Mbps, 15+ km • (2) 10/100 Ethernet Ports • 43° Beamwidth • 24V, 0.2A PoE Adapter Included 	5 GHz NanoStation AC <ul style="list-style-type: none"> • 16dBi, 450+ Mbps, 15+ km • (2) 10/100/1000Mbps Ethernet Ports • 45° Beamwidth • 24V, 0.5A Gigabit PoE Supply Included • Wall Mount Kit (Optional) UBNT-NS-WM 	Wall Mount Kit Used for NanoStation

Rocket & Antenna













UBNT-ROCKET-M5	UBNT-R5AC-LITE	UBNT-AMO-5G10	UBNT-AMO-5G13	UBNT-UB-AM
				
5 GHz Rocket M5 BaseStation <ul style="list-style-type: none"> • 150+ Mbps • (1) 10/100Mbps Ethernet Port • 24V, 1A PoE Adapter Included 	5 GHz Rocket AC BaseStation <ul style="list-style-type: none"> • 500+ Mbps • (1) 10/100/1000Mbps • 24V, 0.5A Gigabit PoE Adapter Included 	5 GHz airMAX Omni Antenna <ul style="list-style-type: none"> • 10dBi • 360° Coverage, 2x2 MIMO Performance 	5 GHz airMAX Omni Antenna <ul style="list-style-type: none"> • 13dBi • 360° Coverage, 2x2 MIMO Performance 	Universal Antenna Mount

Accessories

UBNT-POE-24-12W-G UBNT-POE-24-24W-G	UBNT-N-SW	UBNT-ETH-SP-G2	UBNT-ACB-ISP	UBNT-ACB-AC
				
PoE Injector <ul style="list-style-type: none"> • Gigabit LAN Port • 0.5A/1.0A@24VDC • 12W/24W • Support 24V Passive PoE 	NanoSwitch <ul style="list-style-type: none"> • Outdoor 4-port Gigabit Switch with PoE Passthrough 	Ethernet Surge Protector, Gen 2	airCube ISP Home WiFi AP <ul style="list-style-type: none"> • (4) 10/100 Fast Ethernet Ports • 24V PoE Passthrough for airMAX CPE • 300Mbps@2.4 GHz • Powered by 24V Passive PoE or 2A Micro USB Adapter • Power Adapter Not Included 	airCube AC Home WiFi AP <ul style="list-style-type: none"> • (4) Gigabit Ethernet Ports • 24V PoE Passthrough for airMAX CPE • 300Mbps@2.4 GHz / 867Mbps@5 GHz • Powered by Power Adapter or PoE 24V In on LAN Port 1 • 24V, 1A PoE Adapter Included



UniFi® ROUTING SWITCHING WIRELESS

UBNT-UAP-AC-LITE-US	UBNT-UAP-AC-LR-US	UBNT-UAP-AC-PRO-US	UBNT-UAP-AC-HD-US
			
UniFi AP, AC LITE <ul style="list-style-type: none"> • Ø160 x 31.45mm • (1) 10/100/1000 Ethernet Port • 300Mbps@2.4GHz • 867Mbps@5GHz • 802.3af/A PoE & 24V PoE • 24V, 0.5A Gigabit PoE Adapter • Up to 400ft, Indoor • 250+ Users 	UniFi AP, AC Long Range <ul style="list-style-type: none"> • Ø175.7 x 43.2mm • (1) 10/100/1000 Ethernet Port • 450Mbps@2.4GHz • 867Mbps@5GHz • 802.3af/A PoE & 24V PoE • 24V, 0.5A Gigabit PoE Adapter • Up to 600ft, Indoor • 250+ Users 	UniFi AP, AC PRO <ul style="list-style-type: none"> • Ø196.7 x 35mm • (2) 10/100/1000 Ethernet Ports • 450Mbps@2.4GHz • 1300Mbps@5GHz • 802.3af PoE/802.3at PoE+ • UniFi Switch (PoE) • Up to 400ft, Indoor/Outdoor • 250+ Users 	UniFi AP, AC HD <ul style="list-style-type: none"> • Ø220 x 48.1mm • (2) 10/100/1000 Ethernet Ports • 800Mbps@2.4GHz • 1733Mbps@5GHz • 802.3af PoE • Up to 400ft, Indoor/Outdoor • 500+ Users
UBNT-UAP-AC-SHD-US	UBNT-UAP-AC-M-US	UBNT-UMA-D-US	UBNT-UAP-AC-M-PRO-US
			
UniFi AP, AC SHD <ul style="list-style-type: none"> • Ø220 x 48.1mm • (2) 10/100/1000 Ethernet Ports • 800Mbps@2.4GHz • 1700Mbps@5GHz • 802.3at PoE+ • UniFi Switch (PoE) • Up to 600ft Indoor/Outdoor (Covered) • 1000+ Concurrent Clients • PoE Switch Not Included 	UniFi AP, AC MESH <ul style="list-style-type: none"> • 139.7 x 86.7 x 25.75mm • (1) 10/100/1000 Ethernet Port • 802.3af/A PoE & 24V PoE • 24V, 0.5A Gigabit PoE Adapter • Up to 600ft, Indoor/Outdoor • 250+ Users 	Directional Dual-Band Antenna <ul style="list-style-type: none"> • 201.3 x 128.0 x 32.5mm • (1) 10/100/1000 Ethernet Port • Beamwidth - 2.4GHz 90°, 5GHz 45° • Indoor/Outdoor • <i>Optional Mesh Antenna Designed to Work with the UniFi® AC Mesh AP</i> 	UniFi AP, AC MESH PRO <ul style="list-style-type: none"> • 343.2 x 181.2 x 60.2mm • (2) 10/100/1000 Ethernet Ports • 802.3af PoE • Built-in Antenna • 48V, 0.5A PoE Gigabit Adapter (Included) • Up to 600ft, Outdoor • 250+ Users
UBNT-UAP-AC-IW	UBNT-UC-CK	UBNT-UCK-G2	UBNT-UCK-G2-PLUS
			
UniFi AP, AC In-Wall <ul style="list-style-type: none"> • 139.7 x 86.7 x 25.75mm • (3) 10/100/1000 Ethernet Ports • (1) Uplink, (2) Switch Ports • 300Mbps@2.4GHz • 867Mbps@5GHz • 802.3at PoE+ • UniFi PoE Switch (Not Included) • Indoor • 250+ Concurrent Clients 	UniFi Cloud Key, Controller Hybrid Cloud <ul style="list-style-type: none"> • 21.7 x 43.4 x 121.9mm • (1) 10/100/1000 Ethernet Port • 802.3af PoE or Micro-USB 5V, Minimum 1A • 48V 802.3af or Passive PoE • Connect up to 1 USG • Connect up to 1 USW (UniFi Switch) • Connect up to 23 Aps • 1000 Connected Clients 	UniFi Cloud Key Gen2 <ul style="list-style-type: none"> • 27.10 x 46.80 x 119.75mm • (1) 10/100/1000 Ethernet Port • 802.3af PoE or Micro-USB 5V, Minimum 1A • Connect up to 1 USG • Connect up to 10 USW (UniFi Switch) • 2000 Connected Clients 	UniFi Cloud Key Plus <ul style="list-style-type: none"> • 131.16 x 27.10 x 134.20mm • (1) 10/100/1000 Ethernet Port • 802.3af PoE; Quick Charge 2.0/3.0 Power Adapter (9VDC, 2A) • Connect up to 1 USG • Connect up to 10 USW (UniFi Switch) • Connect up to 40 Aps • 2000 Connected Clients • 1 TB 2.5" SATA HDD (User-Upgradeable*)



UniFi® ROUTING SWITCHING

UBNT-USG	UBNT-USG-PRO-4-US	UBNT-US-8	UBNT-US-8-60W	UBNT-US-24	UBNT-US-48
Gateway Router <ul style="list-style-type: none"> • (3) Gigabit Ethernet Ports • (1) RJ45 Serial Port • 512 MB DDR2 RAM System Memory • 2GB On-Board Flash Storage • 7W 	Enterprise Gateway Router <ul style="list-style-type: none"> • (2) Gigabit Ethernet Ports • (2) Gigabit RJ45/SFP Combo Ports • (1) RJ45 Serial Port • 2 GB DDR3 RAM System Memory • 4 GB On-Board Flash Storage, 40W 	8 Port Managed Switch <ul style="list-style-type: none"> • (8) Gigabit Ethernet Ports • (1) PoE Passthrough Port • 12W • Power via DC 48V Power Adapter or PoE Input 	8 Port Managed Switch-4PoE <ul style="list-style-type: none"> • (8) Gigabit Ethernet Ports • (4) Auto-Sensing 802.3af PoE Ports • 15W Output per PoE Port 	24 Port Managed Switch <ul style="list-style-type: none"> • (24) Gigabit Ethernet Ports • (2) SFP Ports • (1) Serial Console Port • 25W, Rack-Mountable 	48 Port Managed Switch <ul style="list-style-type: none"> • (48) Gigabit Ethernet Ports • (2) SFP+ Ports • (2) SFP Ports • (1) Serial Console Port • 56W, Rack-Mountable
UBNT-POE-24-12W-G UBNT-POE-24-24W-G	UBNT-POE-48-24W-G	UBNT-US-8-150W-US	UBNT-US-16-150W	UBNT-US-24-250W	UBNT-US-48-500W
PoE injector <ul style="list-style-type: none"> • Gigabit LAN Port • 0.5A/1.0A @24VDC • 12W/24W • Support 24V Passive PoE 	PoE injector <ul style="list-style-type: none"> • Gigabit LAN Port • 0.5A@48VDC • 24W • Support 48V Passive PoE 	8 Port Managed PoE Switch <ul style="list-style-type: none"> • (8) Gigabit PoE Ports • (2) SFP Ports • 150W, Desktop-Mountable • Supports PoE+ IEEE 802.3at/af and 24V Passive PoE 	16 Port Managed PoE Switch <ul style="list-style-type: none"> • (16) Gigabit PoE Ports • (2) SFP Ports • (1) Serial Console Port • 150W, Rack-Mountable • Supports PoE+ IEEE 802.3at/af and 24V Passive PoE 	24 Port Managed PoE Switch <ul style="list-style-type: none"> • (24) Gigabit PoE Ports • (2) SFP Ports • (1) Serial Console Port • 250W, Rack-Mountable • Supports PoE+ IEEE 802.3at/af and 24V Passive PoE 	48 Port Managed PoE Switch <ul style="list-style-type: none"> • (48) Gigabit PoE Ports • (2) SFP+ Ports + (2) SFP Ports • (1) Serial Console Port • 500W, Rack-Mountable • Supports PoE+ IEEE 802.3at/af and 24V Passive PoE







EdgeMAX® ROUTING SWITCHING

UBNT-ER-X-US	UBNT-ER-X-SFP-US	UBNT-ERLITE-3	UBNT-ER-12	UBNT-ES-24-LITE
EdgeRouter X <ul style="list-style-type: none"> • (5) Gigabit Ethernet ports • Passive PoE Passthrough Option • 256MB RAM System Memory • 256MB Storage, 5W • Powered via 12VDC, 0.5A Power Adapter or 24V Passive PoE 	EdgeRouter X SFP <ul style="list-style-type: none"> • (5) Gigabit Ethernet Ports • Passive 24V PoE Output, 50W • (1) SFP Port • 256MB RAM System Memory • 256MB Storage, 5W 	EdgeRouter Lite <ul style="list-style-type: none"> • (3) Gigabit Ethernet Ports • (1) RJ45 Serial Port • 512 MB RAM System Memory • 2GB On-Board Flash Storage • 7W 	EdgeRouter 12 <ul style="list-style-type: none"> • (10) Gigabit Ethernet Ports • (2) SFP Ports • (1) RJ45 Serial Port • 1 GB DDR3 RAM System Memory • 4GB On-Board Flash Storage • 20W 	24 Port Managed Switch <ul style="list-style-type: none"> • (24) Gigabit Ethernet Ports • (2) SFP Ports • (1) Serial Console Port • 25W, Rack-Mountable
UBNT-ES-5XP	UBNT-ES-16-150W		UBNT-ES-24-250W	UBNT-ES-48-500W UBNT-ES-48-750W
5 Port Managed PoE Switch XP <ul style="list-style-type: none"> • (5) Gigabit PoE Ports • (1) 10/100 Ethernet Management Port • 60W • Support 24V Passive PoE 	16 Port Managed PoE Switch <ul style="list-style-type: none"> • (16) Gigabit PoE Ports • (2) SFP Ports • (1) Serial Console Port • 150W, Rack-Mountable • Supports PoE+ IEEE 802.3at/af and 24V Passive PoE 		24 Port Managed PoE Switch <ul style="list-style-type: none"> • (24) Gigabit PoE Ports • (2) SFP Ports • (1) Serial Console Port • 250W, Rack-Mountable • Supports PoE+ IEEE 802.3at/af and 24V Passive PoE 	48 Port Managed PoE Switch <ul style="list-style-type: none"> • (48) Gigabit PoE Ports • (2) SFP+ Ports • (2) SFP Ports • (1) Serial Console Port • 500W/750W, Rack-Mountable • Supports PoE+ IEEE 802.3at/af and 24V Passive PoE

Unmanaged Megabit PoE Switch

Long Range Transmission for wider coverage
 Extends Distance up to 820ft. 2X Traditional PoE cabling distance
 Easy plug-and-play connection






Megabit PoE

POE-SW401N	POE-SW801N	POE-SW1602N	POE-SW2402N
			
<ul style="list-style-type: none"> • 4 Port PoE Switch with 1 Port Uplink • 60W, 802.3af/at • 10/100Mbps, Up to 820ft • UL Listed 	<ul style="list-style-type: none"> • 8 Port PoE Switch with 1 Port Uplink • 110W, 802.3af/at • 10/100Mbps, Up to 820ft • UL Listed 	<ul style="list-style-type: none"> • 16 Port PoE Switch with 2 Gb Uplink • 230W, 802.3af/at • 10/100Mbps, Up to 820ft • UL Listed 	<ul style="list-style-type: none"> • 24 Port PoE Switch with 2 Gb Uplink and 2 SFP Ports • 370W, 802.3af/at, • 10/100Mbps, Up to 820ft • UL Listed

Unmanaged Gigabit PoE Injector/Switch

Wired connection speed up to 1,000 Mbps
 Gigabit Ethernet autosensing ports

Gigabit PoE



POE-I100GF	POE-I100GT	POE-SW802EG	POE-SW1604EG	POE-SW2404EG
				
<ul style="list-style-type: none"> • Single Port Gigabit Injector • 15W, 802.3af • 10/100/1000Mbps 	<ul style="list-style-type: none"> • Single Port Gigabit Injector • 30W, 802.3af/at • 10/100/1000Mbps 	<ul style="list-style-type: none"> • 8 Port Gigabit PoE Switch • 120W, 802.3af/at • 10/100/1000Mbps 	<ul style="list-style-type: none"> • 16 Port Gigabit PoE Switch with 4 Gb Uplink • 265W, 802.3af/at • 10/100/1000Mbps 	<ul style="list-style-type: none"> • 24 Port Gigabit PoE Switch with 4 Gb Uplink • 420W, 802.3af/at • 10/100/1000Mbps











IDEAL Tools and Connectors

IDEAL-85-372E/ IDEAL-85-377E	IDEAL-30-495	IDEAL-35-088	IDEAL-45-074
 *Sold Per Piece MPN #85-372 / MPN #85-377	 MPN #30-495	 MPN #35-088	 MPN #45-074
• CAT5e/CAT6 Feed-Thru Modular Plugs	• FT-45™ Feed-Thru Modular Plug Crimp Tool Crimps Feed-Thru, Standard and Shielded	• Snips with Stripping Notch	• Data T@-Cutter
IDEAL-89-1047E	IDEAL-30-793	IDEAL-33-632	IDEAL-45-605
 *Sold Per Piece MPN #89-1047	 MPN #30-793	 MPN #33-632	 MPN #45-605
• InSITE™ RG-59 BNC Compression Connectors Window Ensures Proper Cable Insertion	• OmniSeal™ PRO XL Compression Tool	• LinearX@3 Compression Tool	• PrepPRO® Coax/UTP Cable Stripper

Testers

LTA-X48M	LTA-X78M
 4K	 4K
<ul style="list-style-type: none"> • 4.3" IPS Touch Screen, 960x540 Resolution • 5-1 Multi-Purpose Camera Tester • 8MP IP, 5MP TVI, 4MP AHD, 4MP CVI, Analog Test • H.265/H.264, 4K Video Display via Mainstream • Built-in WIFI; HDMI Input & Output 	<ul style="list-style-type: none"> • 7" Retina Touch Screen, 1920x1200 Resolution • 5-1 Multi-Purpose Camera Tester • 8MP IP, 5MP TVI, 4MP AHD, 4MP CVI, Analog Test • H.265/H.264, 4K Video Display via Mainstream • Built-in WIFI; HDMI Input & Output

Power Strips and Extension Cords

LTPE1610/LTPE1625 LTPE1650/LTPE16100	LTPE1225-L3/LTPE1250-L3/ LTPE12100-L3	LTPE1420-3	LTPS0802/LTPS0806/LTPS0812
 UL LISTED	 UL LISTED	 UL LISTED	 UL LISTED
<ul style="list-style-type: none"> • 10/25/50/100ft, 16/3C SJTW Extension Cord • Orange Single Outlet, UL Listed 	<ul style="list-style-type: none"> • 25/50/100ft, 12/3C SJTW Extension Cord • Yellow 6ft Cord, Triple Outlet Lighted when Power is On, UL Listed 	<ul style="list-style-type: none"> • 20ft 14/3C Indoor Extension Cord • Orange Cord, Triple Outlet with Sliding Cover Feature, UL Listed 	<ul style="list-style-type: none"> • 8 Outlet Power Strips • White, 2/6/12ft Cord, UL Listed
LTPS0606-M	LTPS0806-M	LTPS0806-A	LTPS1215-A
 UL LISTED	 UL LISTED	 UL LISTED	 UL LISTED
<ul style="list-style-type: none"> • 6 Outlet Metal Case Outlet Strips • Yellow, 6ft Cord, ETL listed 	<ul style="list-style-type: none"> • 8 Outlet Metal Case Outlet Strips • Yellow, 6ft Cord, UL listed 	<ul style="list-style-type: none"> • 8 Way Aluminum Alloy Case Power Bar • 6ft Cord, ETL listed 	<ul style="list-style-type: none"> • 12 Way Aluminum Alloy Case Power Bar • 15ft Cord, ETL listed

Power Adapters

PS120V0800	PS120V1000	PS120V2000	PS120V3000
<ul style="list-style-type: none"> • 800mA • DC 12V 	<ul style="list-style-type: none"> • 1000mA • DC 12V 	<ul style="list-style-type: none"> • 2000mA • DC 12V 	<ul style="list-style-type: none"> • 3000mA • DC 12V
TSS-6W	PS240V1000	PS240V3000	DV-AT12015-D01
<ul style="list-style-type: none"> • 5000mA • DC 12V 	<ul style="list-style-type: none"> • 1000mA • AC 24V 	<ul style="list-style-type: none"> • 3000mA • AC 24V 	<ul style="list-style-type: none"> • 1500mA (Max) • AC 24V to DC 12V

Power Supplies

PS120V5-D	DV-AT1207M-D09	DV-AT1209A-D9P	DV-AT1212A-D18P	DV-AT1220A-D18P	
<ul style="list-style-type: none"> • 4 Port; 5 Amp • Protection: PTC • DC 12V 	<ul style="list-style-type: none"> • 9 Port; 7 Amp • Protection: PTC • DC 12V 	<ul style="list-style-type: none"> • 9 Port; 9 Amp • Protection: PTC • DC 12V 	<ul style="list-style-type: none"> • 18 Port; 12 Amp • Protection: PTC • DC 12V 	<ul style="list-style-type: none"> • 18 Port; 20 Amp • Protection: PTC • DC:12V 	
DV-RT1224A-D24	DV-RT1232A-D32	DV-AC2408A-D07	DV-AC2412A-D10	DV-AT1205A-D07	DV-AT1209A-D9
<ul style="list-style-type: none"> • 24 Port; 24 Amp • Protection: PTC • DC 12V 	<ul style="list-style-type: none"> • 32 Port; 32 Amp • Protection: PTC • DC 12V 	<ul style="list-style-type: none"> • 9 Port; 8 Amp • Protection: PTC • AC 24V 	<ul style="list-style-type: none"> • 18 Port; 12 Amp • Protection: PTC • AC 24V 	<ul style="list-style-type: none"> • 4 Port; 5 Amp • Protection: PTC • DC 12V 	<ul style="list-style-type: none"> • 9 Port; 9 Amp • Protection: Fuse • DC 12V
DV-AT1212A-D18	DV-AT1210A-D07	DV-AT1210A-D10	DV-AT1215A-D10	DV-AT1232A-D18	DV-AT1232A-D27
<ul style="list-style-type: none"> • 18 Port; 12 Amp • Protection: Fuse • DC 12V 	<ul style="list-style-type: none"> • 9 Port; 10 Amp • Protection: Fuse • DC 12V 	<ul style="list-style-type: none"> • 18 Port; 10 Amp • Protection: Fuse • DC 12V 	<ul style="list-style-type: none"> • 18 Port; 18 Amp • Protection: Fuse • DC 12V 	<ul style="list-style-type: none"> • 18 Port; 32 Amp • Protection: Fuse • DC 12V 	<ul style="list-style-type: none"> • 27 Port; 32 Amp • Protection: Fuse • DC 12V

Passive Video Balun Transceivers

LTAB4020T	LTAB4030TP
• 1-Ch HD Passive Video Balun for 3/4/5MP HD-TVI, CVI, AHD and CVBS	• 1-Ch HD Video & Power Balun for 3/4/5MP HD-TVI, CVI, AHD and CVBS

Warning Signs

LTSTICKER	LTSIGNB	LTSIGNA	LTSIGNOD	ACS-801
• Warning Sticker Decal • Weather-Resistant	• 9"(W) x 11"(H)	• 11"(W) x 18"(H)	• Sign Outdoor 10.5" x 10.5"	• Solar Power (No Battery Needed) • Actively Flashing LCD

DVR Lockboxes

LT-DVRLB18-18-5 LT-DVRLB21-21-8 LT-DVRLB21-24-8 LTBHWB (Wall Mount Bracket)

Monitor Brackets

LTMB1026	LTMB1737	LTMB2655	LTMB3270
• Monitor Bracket • For 10"-26" Screen Size • Distance to Wall 35-390mm • Max Loading Weight 10Kg	• Monitor Bracket • For 17"-37" Screen Size • Distance to Wall 35-380mm • Max Loading Weight 30Kg	• Monitor Bracket • For 26"-55" Screen Size • Distance to Wall 7mm • Max Loading Weight 50Kg	• Monitor Bracket • For 32"-70" Screen Size • Distance to Wall 70-390mm • Max Loading Weight 75Kg

CCTV Monitors

M-185JPGM8	M-215JPGM8
• Monitors Come with: Remote, BNC, HDMI & VGA Inputs	

Connectors

LTA1001	LTA1002	LTA1003	LTA1004	LTA1005	LTA1006	LTA1007	LTA1013	LTA1014	LTA1016	KY5E110
• BNC Twist-On RG59 Male (20pcs/pack)	• BNC Male to RCA Female (20pcs/pack)	• BNC Female to RCA Male (20pcs/pack)	• BNC Male to RCA Male (20pcs/pack)	• BNC Coupler Female to Female (20pcs/pack)	• BNC Compression for RG59 (20pcs/pack)	• BNC Male Crimp-on (20pcs/pack)	• BNC Male to 2 BNC Female (20pcs/pack)	• RJ45 8P8C Cat5e Crimp Connector	• RJ45 8P8C Cat6 Crimp Connector	• Enhanced Cat5e Keystone Jack

LT-CT601W/ LT-CT601B LT-CT801W/LT-CT801B LT-CT1201W/LT-CT1201B	LTAC3005/LTAC3110 LTAC3125/LTAC3150	LTA2003	LTAC3100	LTA2017 LTA2013	LTA2004 LTA2014	LTA2010 LTA2008
• Cable Tie (100 pcs/pack) • 6" White/Black • 8" White/Black • 12" White/Black	• HDMI w/Ethernet • 4.5/10/25/50ft Cable • Hi-Speed 1080P/3D, 100% Triple Shield 24K • Gold Plated w/Nylon Jacket	• Terminal Connector • 9 Terminal, DC & AC • Connector/Splitter	• 100ft HDMI Cable • Hi-Speed 1080P with USB Booster 26AWG	• DC Power Connector • LTA2017-Male • LTA2013-Female (20pcs/pack)	• DC Power Adapter Cable • LTA2004-Male • LTA2014-Female (20pcs/pack)	• Male/Female Pigtail • LTA2010-Male • LTA2008-Female




Cables (CAT5e, CAT6, Pre-Made Siamese, Coaxial Siamese)

LTAC5100W-CMR LTAC5100BL-CMR LTAC5100B-CMR	LTAC6250W-CMR LTAC6250BL-CMR LTAC6250B-CMR	LTAC5100B-CMX LTAC6250B-CMX	LTAC6250W-CMP LTAC6250BL-CMP
			
<ul style="list-style-type: none"> • 1000ft CAT5e 99.99% OFC • UL Listed, RoHS Compliant • ISO/IEC11801, ANSI/TIA-568B-C.2 • Pass Fluke Test • CMR Rated • White / Blue / Black 	<ul style="list-style-type: none"> • 1000ft CAT6 99.99% OFC • UL Listed, RoHS Compliant • ISO/IEC11801, ANSI/TIA-568B-C.2 • Pass Fluke Test • CMR Rated • White / Blue /Black 	<ul style="list-style-type: none"> • 1000ft CAT5e/ CAT6 99.99% OFC • ETL Listed, RoHS Compliant • ISO/IEC11801, ANSI/TIA-568B-C.2 • Pass Fluke Test • Outdoor Rated, UV Resistance • Black 	<ul style="list-style-type: none"> • 1000ft CAT6 99.99% OFC • UL Listed, RoHS Compliant • ISO/IEC11801, TIA-568-C.2 • Pass Fluke Test • Plenum Rated, CMP • White / Blue
LTAC2040 LTAC2046	LTAC2031W / LTAC2031B LTAC2033W / LTAC2033B	LTAC2030W / LTAC2030B LTAC2032W / LTAC2032B	LTAC2060W / LTAC2060B LTAC2100W / LTAC2100B LTAC2150W / LTAC2150B
			
<ul style="list-style-type: none"> • 1000ft CCA CAT5e/CAT6 • Commercial Grade Network Cable 	<ul style="list-style-type: none"> • Siamese Coaxial Cable • White / Black Bare Wire • 500ft / 1000ft RG59 Coaxial 95% Braided + 18/2 • 18 AWG CCA Cable 	<ul style="list-style-type: none"> • Siamese Coaxial Cable • White / Black Bare Wire • 500ft / 1000ft RG59 Coaxial 95% Braided + 18/2 • Solid 100% 18AWG Oxygen Free Copper 	<ul style="list-style-type: none"> • Pre-Made HD Siamese Cable • Includes BNC and Power Connector • 60ft / 100ft / 150ft, Color: White / Black

CAT6 Patch Cable, CAT5e Pre-Made Cable

LTPC6001BL-CMR LTPC6001GN-CMR LTPC6001Y-CMR LTPC6001B-CMR LTPC6001W-CMR	LTPC6003BL-CMR LTPC6003B-CMR LTPC6003W-CMR	LTPC6005BL-CMR LTPC6005B-CMR LTPC6005W-CMR	LTPC6010BL-CMR LTPC6010B-CMR LTPC6010W-CMR	LTAC2042 LTAC2041
				
<ul style="list-style-type: none"> • 1ft CAT6 Patch Cable, 50 Micro Gold Plated 3 • Prong Connector, UL Listed, RoHS Compliant • Pass Fluke Test, CMR Rated • Blue / Green / Yellow / Black / White 	<ul style="list-style-type: none"> • 3ft CAT6 Patch Cable, 50 Micro Gold Plated 3 • Prong Connector, UL Listed, RoHS Compliant • Pass Fluke Test, CMR Rated • Blue / Black / White 	<ul style="list-style-type: none"> • 5ft CAT6 Patch Cable, 50 Micro Gold Plated 3 • Prong Connector, UL Listed, RoHS Compliant • Pass Fluke Test, CMR Rated • Blue / Black / White 	<ul style="list-style-type: none"> • 10ft CAT6 Patch Cable, 50 Micro Gold Plated • 3 Prong Connector, UL Listed, RoHS Compliant • Pass Fluke Test, CMR Rated • Blue / Black / White 	<ul style="list-style-type: none"> • Pre-Made RJ45 CAT5e Cable • LTAC2042-50ft • LTAC2041-100ft

Control Cable

LTAC1802G-CMR	LTAC1806G-CMR	LTAC1822Y-CMR
		
<ul style="list-style-type: none"> • 18 AWG / 2 Conductor Access Control Wire • 1000ft Stranded • 99.99% OFC • Access Control, Intercom and Alarm • CMR Rated, UL Listed • Color: Gray 	<ul style="list-style-type: none"> • 18 AWG 6 Conductor Control Wire • 500ft Stranded • 99.99% OFC • CMR Rated • Shielded ETL • Color: Gray 	<ul style="list-style-type: none"> • 500 ft Stranded Control Cable • 99.99% OFC • 18/4 + 22/2 + 22/4 + 22/6 Combination Cable • Shielded 22/6 • ETL Rated, CMR Rated • Color: Yellow

Try Out LTS High Quality OFC Cable

Our CAT5e and CAT 6 cables have Pass FLUKE Permanent Link Test

What is OFC?

OFC stand for Oxygen-Free Copper. Type of copper that electrolytically refined to reduce the level of oxygen to .001% or below.

Why OFC?

OFC give you high ductility, electrical and thermal conductivity.

What is FLUKE Permanet link test?

FLUKE Permanet link Test guaranteed to meet the NEXT, FEXT and Return Loss requirements of the ANSI/TIA-568-C.2 or ISO/IEC 11801:2011 for the network cables.

Cables (DC Power, VGA, Microphone)

LTA2005	LTA2006	LTA2011	LTA2018	LTA506	LTA2001	LTA2002	LTAV3010/LTAV3025 LTAV3050/LTAV3100
<ul style="list-style-type: none"> • DC Power Splitter • 1 Female to 2 Male 	<ul style="list-style-type: none"> • DC Power Splitter • 1 Male to 2 Female 	<ul style="list-style-type: none"> • DC Power Splitter • 1 Female to 4 Male 	<ul style="list-style-type: none"> • DC Power Splitter • 1 Female to 8 Male 	<ul style="list-style-type: none"> • High Sensitivity Audio Monitor Mic • Bug Range: 30 sq. meters • Frequency: 100-5500Hz 	<ul style="list-style-type: none"> • 12" Microphone w/ Power Cable • Microphone with Amplifier 	<ul style="list-style-type: none"> • 45" Microphone w/ Video & Power • Microphone with Amplifier 	<ul style="list-style-type: none"> • VGA Extension Cable 10ft / 25ft / 50ft / 100ft

Converters, Splitters, Extenders





LTAH2100E		LTAH014LN		LTAH018L	
<ul style="list-style-type: none"> • USB RJ45 Extender • UBS2, USB A Female • Plug & Play • Cable Type: CAT5, 5E, 6, UTP Extend Distance to 150ft 		<ul style="list-style-type: none"> • 1 In/4 Out HDMI Splitter • Support HDMI 1.3 • Support 1080P • HDCP & 3D Support 		<ul style="list-style-type: none"> • 1 In/8 Out HDMI Splitter • 8 Identical HDMI Outputs • Up to 225MHz • Support 3D 	
LTAH3100E	LTAH1070E	LTAH1070EK	LTAH5100T	LTAH5300T	
<ul style="list-style-type: none"> • VGA/Audio RJ45 Extender • Video Type: VGA • Support 1920x1440 • 1x Stereo Audio (R/L) • Extend Distance to 900ft 	<ul style="list-style-type: none"> • HDMI Extender 1080P • Supports 1080P Up to 165ft • DC 5V/1A, Power Adaptor Included 	<ul style="list-style-type: none"> • HDMI Extender 4K • Supports 4K up to 115ft • Supports 1080P up to 230ft • USB 2.0, Connect with Keyboard/Mouse • Support PoE Power Supply, No Need for Extra Power at RX Side Maximum Transmission Distance is 230ft • DC12V/1A, Power Adaptor Included 	<ul style="list-style-type: none"> • HD-TVI To HDMI Converter • Input: 1xHD-TVI • Output: 1xHDMI, 1xHD-TVI Loop Out 	<ul style="list-style-type: none"> • HD-TVI Distributor • Input: 1xHD-TVI • Output: 3xHD-TVI 	

Tools

T201WS	T203MS	T205CM	LTA-T206S	LTA-T208CS	LTA-T207C
<ul style="list-style-type: none"> • Coaxial Cable Stripper • Cut & Strip Coaxial Cable • Durable Delrin Material • Rotating Ring 	<ul style="list-style-type: none"> • Wire Stripper • Strip Wire (12 - 22 gauge) with One Pull of Trigger • Built-in Ruler Splicer with Auto Adjust 	<ul style="list-style-type: none"> • Professional Crimping Tool • BNC Compression, F-Type, RCA Connectors • For CATV, DSS sec. and Residential Cable Connection 	<ul style="list-style-type: none"> • 4 in 1 Wire Cutter & Stripper • Easy to Strip & Cut Wire • One Lock Control (Open/Close) • AWG 24.22.20.18.16.14.12 	<ul style="list-style-type: none"> • Multi-Modular Plug Crimp, Strip and Cut Tool • Pro Modular Crimp Tool with Cut and Strip Crimp • Types: 8P8C, 6P6C, 4P4C 	<ul style="list-style-type: none"> • Coaxial Crimping Tool • Hex Tool for BNC F-type Crimp on Connector

Dummy Cameras

DUM-301EB	DUM-501E	DUM-501EB

	Edge		Cloud	
Category	SSD	HDD	HDD	
				
Product Name	CL SN720	WD Purple HDD	Ultrastar HDD HC530	WD Gold HDD
Application	Recorder		Analytics	
Capacity	Up to 2TB	Up to 18TB	14TB	Up to 18TB
Advantages	<ul style="list-style-type: none"> Designed with high endurance up to 1,600 TBW* for continuous operation For mass transit video surveillance DVRs and NVRs Withstands operating temperatures from 0° to 85 °C 20G operating vibration for reliability and ruggedness 	<ul style="list-style-type: none"> High capacities up to 18TB, engineered specifically for surveillance security systems. Enhanced performance with AllFrame™ technology to reduce frame loss, improve overall video playback, and increase the number of bays supported within an NVR Enables upgrades & expansion of existing surveillance systems 	<ul style="list-style-type: none"> Employs advanced technology to deliver among the best in reliability, capacity, power efficiency and performance Best fit for heavy work environment of video analytics and deep learning Engineered for tough environments – vibration, humidity, temperature 	<ul style="list-style-type: none"> Enhanced vibration protection technology for improved performance in high-vibration environments SATA interface for mainstream video analytics servers Performance-optimized for heavy workloads
Number of Bays	N/A	8+ Bays (4TB and larger)	8+ Bays (No Limit)	8+ Bays (No Limit)
Number of Cameras	Up to 32 per SSD	Up to 64 per HDD	N/A	N/A
Surveillance System Power on Hours	24/7	24/7	24/7	24/7
RAID Support	N/A	Yes	Yes	Yes
Limited Warranty	5-Year	3-Year	5-Year	5-Year



SkyHawk

SkyHawk AI

Exos

	SMB surveillance DVR and NVR	AI-surveillance NVR	Centralized/NVR Analytics
Form Factor	3.5-inch	3.5-inch	3.5-inch
Capacity	14TB, 12TB, 10TB, 8TB, 6TB, 4TB, 3TB, 2TB, 1TB	14TB, 12TB, 10TB, 8TB, 6TB, 4TB	12TB, 10TB, 8TB, 6TB, 4TB, 2TB, 1TB
Health Management	14TB, 12TB, 10TB, 8TB, 6TB, 4TB	-	-
NVR-Ready	Yes ²	Yes (RV Sensors)	Yes (RV Sensors)
# of Cameras Supported	1 to 64 Cameras	1 to 64 Cameras	-
Workload Rating	180TB/year	550TB/year	550TB/year
Rescue Data Recovery Services	Optional	Standard	-
Warranty	3-year Warranty	5-year Warranty	5-year Warranty

1. Available on capacities above 3TB



Video Solutions for Security Professionals

Texas - Houston

8634 Westpark Dr.
Houston, TX 77063
Tel: 713-587-1800
Email: Support.Houston@LTSecurityinc.com
Sales Office: 8:30am - 6pm (CST): MON - FRI
En LTS Houston hablamos español

New Jersey - Mount Laurel

109 West Park Dr., Suite B & C
Mount Laurel, NJ 08054
Toll Free: 855-835-8889
Tel: 856-780-9888
Email: Support.NewJersey@LTSecurityinc.com
Sales Office: 8:30am - 6pm (EST): MON - FRI

California - Los Angeles

17333 Freedom Way
City of Industry, CA 91748
Toll Free: 888-587-5871
Tel: 626-435-2838
Email: Support.LosAngeles@LTSecurityinc.com
Sales Office: 8:30am - 6pm (PST): MON - FRI
En LTS California hablamos español

Texas - Dallas

1100 Valwood Pkwy., Suite 112
Carrollton, TX 75006
Tel: 469-289-5780
Email: Support.Dallas@LTSecurityinc.com
Sales Office: 8am - 5pm (CST): MON - FRI

New Jersey - Pine Brook

16 Chapin Road, Unit 905
Pine Brook, NJ 07058
Tel: 973-287-4427
Email: Support.PBNJ@LTSecurityinc.com
Sales Office: 9am - 6pm (EST): MON - FRI
After-hour Pickup Available
En LTS Pine Brook hablamos español

California - San Francisco

38507 Cherry St. Suite G
Newark, CA 94560
Toll Free: 888-216-2812
Tel: 510-201-9868
Email: Support.SanFrancisco@LTSecurityinc.com
Sales Office: 9am - 6pm (PST): MON - FRI

Illinois

1459 Elmhurst Rd.
Elk Grove Village, IL 60007
Tel: 630-348-8088
Email: Support.Chicago@LTSecurityinc.com
Sales Office: 9am - 6pm (CST): MON - FRI
En LTS Illinois hablamos español

New York

99 Seaview Blvd., Suite 1B
Port Washington, NY 11050
Tel: 646-558-3888
Email: Support.NewYork@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
After-hour Pickup Available

Arizona

2850 S. 36th Street, Suite A-7
Phoenix, AZ 85034
Toll Free: 877-284-2890
Tel: 602-903-2220
Email: Support.AZ@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (MST): MON - FRI

Florida - Miami

8400 NW 25th St., Suite 110
Miami, FL 33122
Tel: 786-693-1813
Email: Support.Florida@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
En LTS Florida hablamos español

Maryland

4501 Forbes Blvd., Suite I
Lanham, MD 20706
Tel: 240-493-8988
Email: Support.Maryland@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
En LTS Maryland hablamos español

Florida - Orlando

807 S. Orlando Ave., Suite K
Winter Park, FL 32789
Tel: 786-693-1813
Email: Support.Florida@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
En LTS Florida hablamos español

Georgia

5933 Peachtree Industrial Blvd, Suite B
Norcross, GA 30092
Tel: 678-710-3788
Email: Support.GA@LTSecurityinc.com
Sales Office: 9am - 6pm (EST): MON - FRI

