

CMIP7562F


6 MP Fisheye Network Camera



Key features

- 1/1.8" sensor
- 6 megapixel image sensor
- Up to 3072 x 2048 resolution
- 360° view angle
- Multiple viewing modes
- Multiple ePTZ streams with preset and patrol functions
- Up to 33ft(10m) IR range

Dimensions

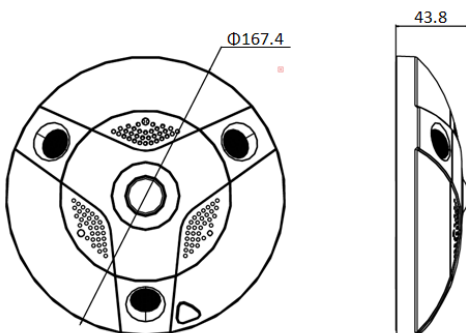

CMIP7562F	
Camera	
Image Sensor	1/1.8" sensor
Min. Illumination	0.05 lux @ (F1.2, AGC ON), 0.3 lux @ (F2.8, AGC ON) 0 lux with IR
Shutter Speed	1/25s ~ 1/100,000s
Lens	1.27mm @F2.8, angle of view: 360°
Lens mount	M12
Day & Night	ICR
Digital Noise Reduction	3D DNR
Wide Dynamic Range	Digital WDR
Compression Standard	
Video Compression	H.264/MJPEG
H.264 Type	Baseline Profile / Main Profile / High Profile
Video Bit Rate	32 Kbps – 16 Mbps
Image	
Max. Resolution	3072 × 2048
Frame Rate	High-frame Mode: support 60Hz: 1 × fisheye (3072 × 2048, 25fps) or (2048 × 2048, 30fps) or 4 × PTZ at (1024 × 768, 30fps) 50Hz: 1 × fisheye (3072 × 2048, 25fps) or (2048 × 2048, 25fps) or 4 × PTZ at (1024 × 768, 30fps) Multi-channel Mode: support 60Hz: 1 × fisheye (1280 × 1280, 15fps) and 1 × panoramic (2048 × 1536, 15fps) and 3 × PTZ (1024 × 768, 15fps) 50Hz: 1 × fisheye (1280 × 1280, 12.5fps) and 1 × panoramic (2048 × 1536, 12.5fps) and 3 × PTZ (1024 × 768, 12.5fps)
Image Setting	Saturation, Brightness, Contrast, Hue, Sharpness, AGC, White Balance
High Light Compensation	Support
Day/night Switch	Auto / Manual / Scheduled / Alarm trigger
Network	
Network Storage	NAS, SAMB / CIFS
Alarm trigger	Motion detection, dynamic analysis, tamper alarm, network disconnect, IP address conflict, storage full, storage error
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Security	User Authentication, Watermark, IP address filtering, Anonymous access
Standard	ONVIF, PSIA, CGI
Interface	
Communication Interface	1 RJ45 10M/100M Ethernet port
On-board storage	Built-in Micro SD/SDXC slot, up to 64 GB
General	
Operating Conditions	-22 ° F – 140 ° F (-30 ° C – 60 ° C) Humidity 95% or less (non-condensing)
Power Supply	DC12V ± 10% / PoE
Power Consumption	Max. 11W
IR range	Max. 33ft(10m)
Protection	IEC 60068-2-75 test, Eh, 50J; EN 50102, EN50155
Dimensions	Φ6.6" × 1.7" (Φ167.4 × 43.8mm)
Weight	1.7lb(800g)