

LTKB04 Specifications


Product Image



Specification

- Size: 90Lx35Wx37.7H(mm)
- Input : DC12V
- Contact rating: 1A@30VDC;0.5A@125VAC
- Output contact: NO\NC\COM
- Mechanical life: 1,000,000 tests
- Suitable for door: Hollow Door
- Detection range: 4-10cm(Adjustable)
- Time delay: 0.5~25s(Adjustable)
- Operating temp: $-20^{\circ}\text{C} \sim +55^{\circ}\text{C}$ (14-131F)
- Suitable humidity: 0-95% (relative humidity)
- LED Indicator:
 - White LED indicator: Power OFF
 - Red LED indicator: Power ON(standby)
 - Green LED indicator: Power ON(sensation)
- Material: Stainless
- Weight: 0.18kg


Installation & Size

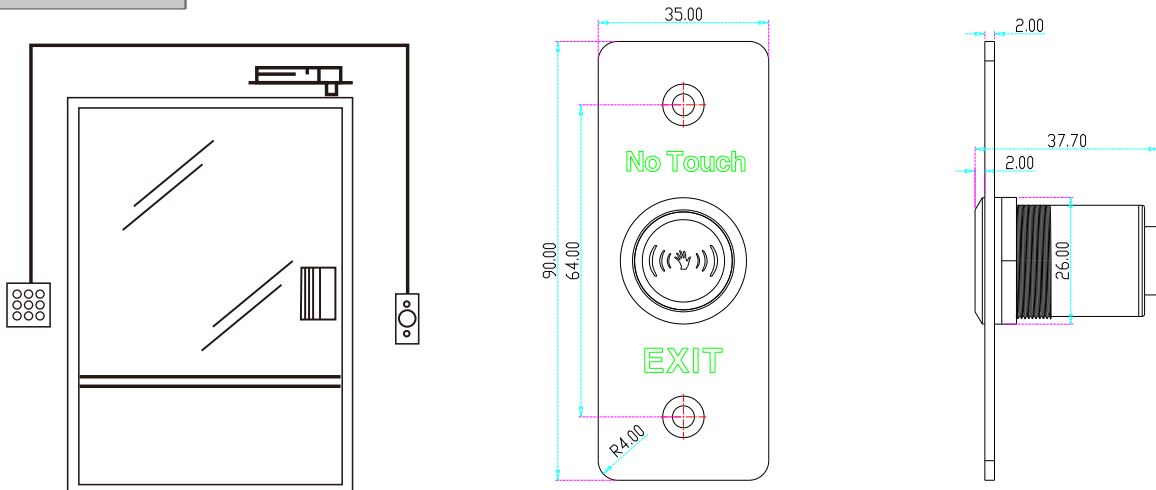

Installation

Detection range: 4-10cm(Adjustable)

- VR1 illustration • •
- ⊕ The Farthest distance
 - ⊕ The Nearest distance

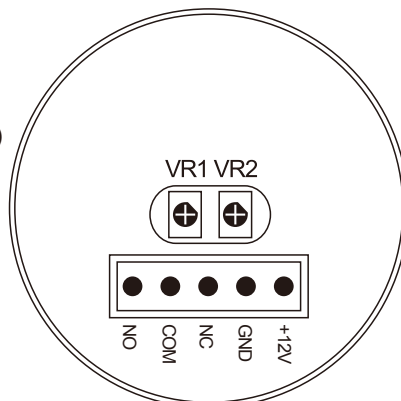

Time delay:0.5S~25S

- VR2 illustration • •
- ⊕ Min.time delay
 - ⊕ Max.time delay