

LTS Outdoor Surveillance Box OutdoorBOX-03




- High strength Polymer Material(Flame Proof UL94-V0)
- IP66 & IK10 Protection
- Fast Deployment & Easy Installation to be mounted in a pole or a wall
- Highly adaptable with LTS IPC, PTZ and IP Horn Speakers

• Specification


General	
Material	PC/ASA; LTS White (RAL 9003)
Dimension	448.72mm x 387.53mm x 225.44mm
Weight	5.2kg
Startup and Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F). Humidity 95% or less (non-condensing)
General Function	Loading Capacity of Front Panel is 8kg; side panel is 5kg
Packing List	Security Box x1 Installation back Plate x1 Pegboard x1 Shelf board x1 Din Rail x1 Phillips head Screw M8x20 x4 Phillips head Screw M8x12 x2 Phillips head Screw M4x10 x12 Self-tapping Screw M3x10 x10 Hex Head Phillips Screw M8x25 x4 Hex socket Screw M6x25 x4 Hexagon Socket Screwdriver x1 Cylindrical pin M4x40 x4 Waterproof Cable connector 1(5-6.5mm) x3 Waterproof Cable connector 2(6.5-8mm) x3 Network cable piercing accessories x1 Cable Gland G3/4 x1 Cable Gland M20 x2 Metal strapping band(80-200mm) x5
Approval	
Protection	IP66, IK10

▪ **Dimension** *Unit: mm (inch)*


Box Dimension:

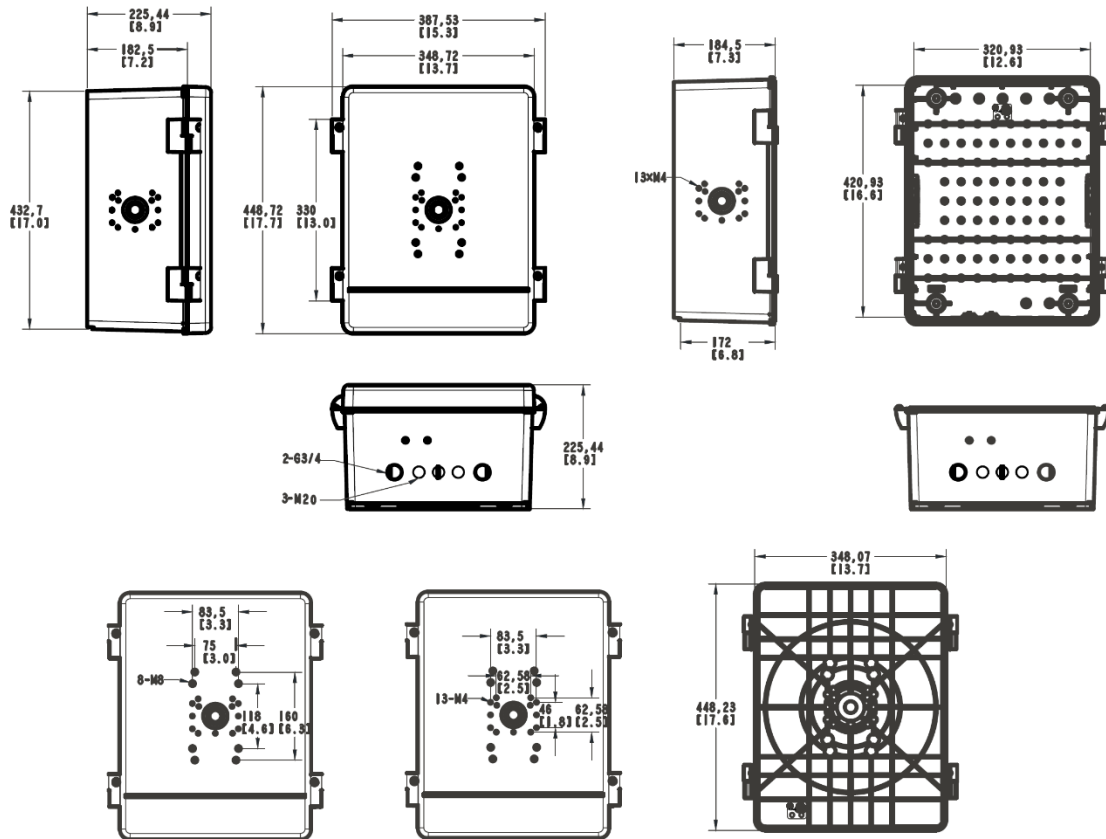


Front Panel:

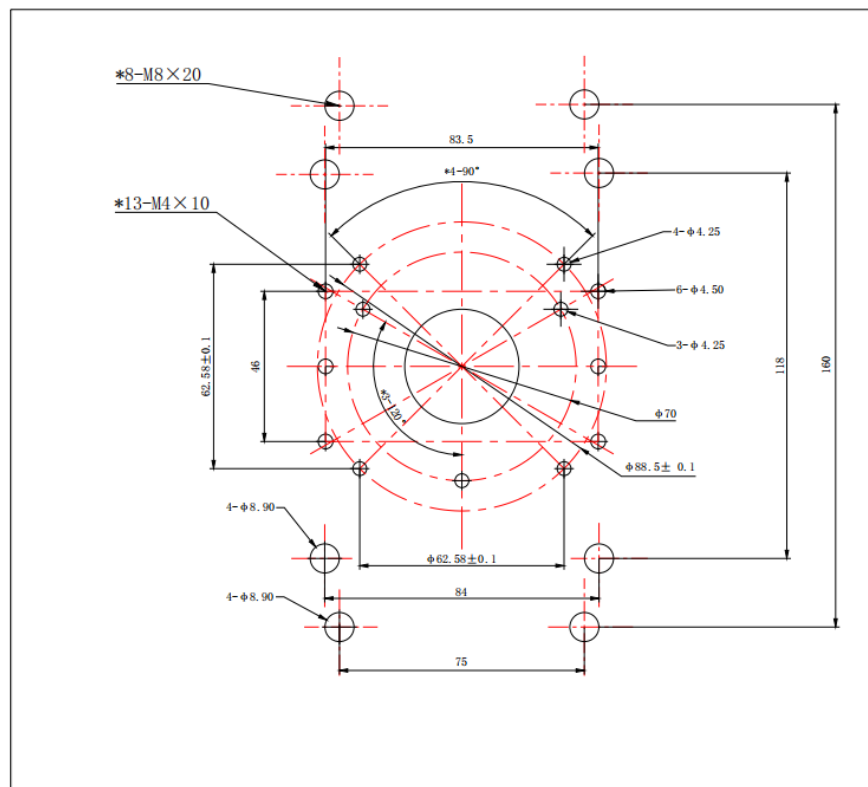

Side Panel:

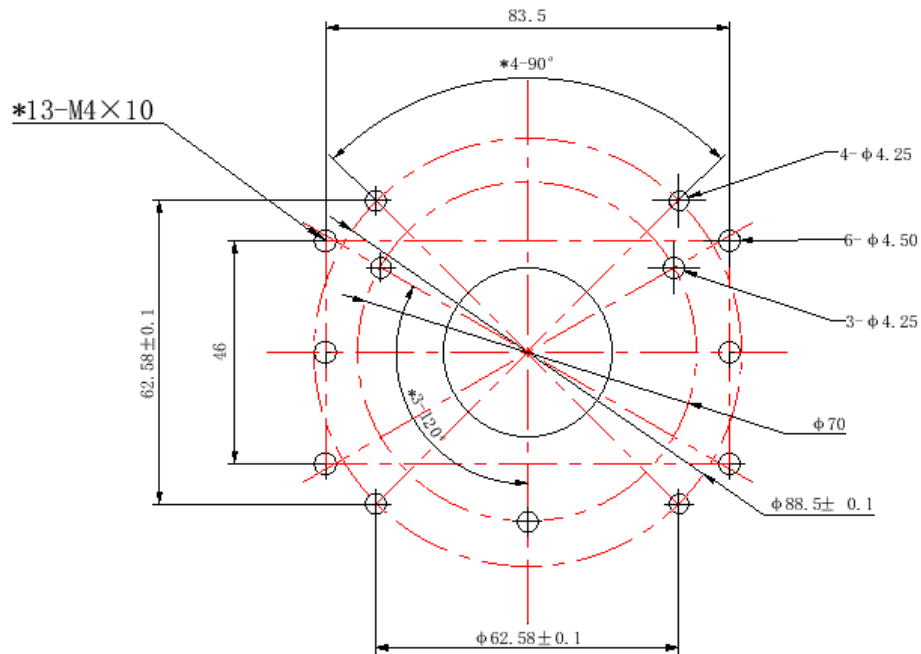

Installation Plate Dimension:

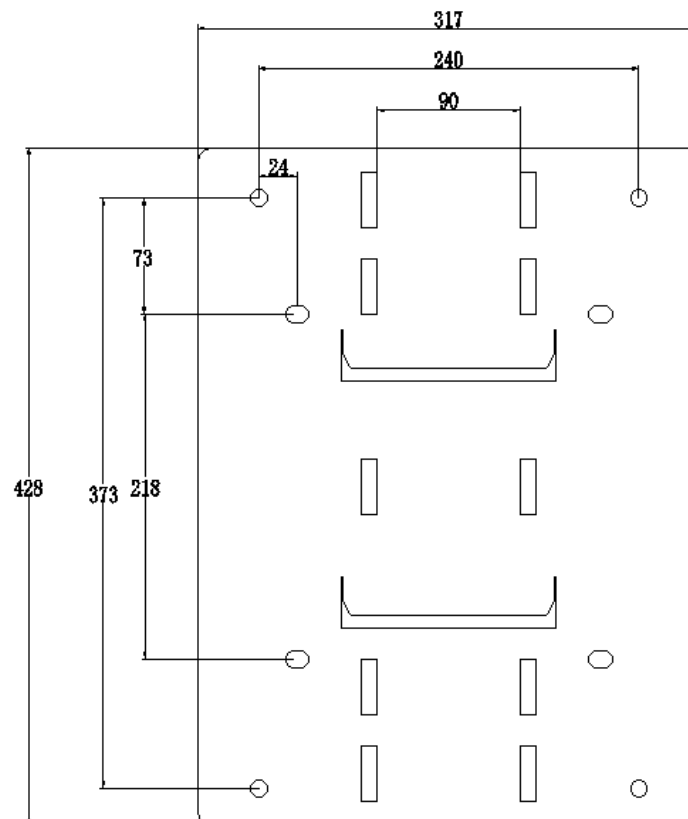

▪ **Accessory**

With Cameras:



LTB762



LTB453



LTB03-W



LTB345



LTB701



LTB801




LTB347H

Box Installation:



Metal strapping band (x5 included)
(Pole Mount 80-200mm)



Installation Plate (included)
(Wall Mount, M8 bolts need to purchase)