

## 8 MP Panoramic Color 24/7 Fixed Turret Network Camera CMIP3CD8PWI-28LAISP



- 180° panoramic view
- Color 24/7 image
- AI-ISP for excellent noise reduction effect
- White light & IR light & Smart Hybrid Light modes
- Human and vehicle classification based on deep learning
- Active strobe light and audio alarm to warn trespassers off
- Crystal-clear audio with Arrayed Dual-Mic
- Clear imaging against strong backlight due to 130 dB WDR technology
- Anti-corrosion design (NEMA 4X), more reliable
- Dust and water resistant (IP67)
- Audio and alarm interface available
- Eco-friendly and tamper-free packaging


## ▪ Specification

| Camera                      |                                                                                                                                                 |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor                | 1/2.5" Progressive Scan CMOS                                                                                                                    |
| Max. Resolution             | 4256 × 1888                                                                                                                                     |
| Min. Illumination           | Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Supplement light                                                                                 |
| Shutter Time                | 1 s to 1/100,000 s                                                                                                                              |
| Day & Night                 | IR cut filter                                                                                                                                   |
| Angle Adjustment            | Pan: 0° to 360°, tilt: 0° to 75°, rotate: 0° to 360°                                                                                            |
| Lens                        |                                                                                                                                                 |
| Lens Type                   | Fixed focal lens, 2.8 mm                                                                                                                        |
| Focal Length & FOV          | 2.8 mm, horizontal FOV 182.6°, vertical FOV 74.6°                                                                                               |
| Lens Mount                  | M12                                                                                                                                             |
| Iris Type                   | Fixed                                                                                                                                           |
| Aperture                    | F1.0                                                                                                                                            |
| Depth of Field              | 2.8 mm: 1.6 m to ∞                                                                                                                              |
| DORI                        |                                                                                                                                                 |
| DORI                        | 2.8 mm: D: 62 m, O: 24 m, R: 12 m, I: 6 m                                                                                                       |
| Illuminator                 |                                                                                                                                                 |
| Supplement Light Type       | White Light, IR                                                                                                                                 |
| Supplement Light Range      | Up to 30 m                                                                                                                                      |
| Smart Supplement Light      | Yes                                                                                                                                             |
| IR Wavelength               | 850 nm                                                                                                                                          |
| Video                       |                                                                                                                                                 |
| Main Stream                 | 50Hz: 20fps(4256 × 1888, 4096 × 1856)<br>60Hz: 20fps(4256 × 1888, 4096 × 1856)                                                                  |
| Sub-Stream                  | 50Hz: 20fps(1200 × 536, 960 × 432)<br>60Hz: 20fps(1200 × 536, 960 × 432)                                                                        |
| Video Compression           | Main stream: H.265/H.264/H.264+/H.265+,<br>Sub-stream: H.265/H.264/MJPEG                                                                        |
| Video Bit Rate              | 32 Kbps to 24 Mbps                                                                                                                              |
| H.264 Type                  | Baseline Profile, Main Profile, High Profile                                                                                                    |
| H.265 Type                  | Main Profile                                                                                                                                    |
| Bit Rate Control            | CBR, VBR                                                                                                                                        |
| Scalable Video Coding (SVC) | H.264 and H.265 encoding                                                                                                                        |
| Region of Interest (ROI)    | 1 fixed regions for each stream                                                                                                                 |
| Audio                       |                                                                                                                                                 |
| Audio Type                  | Mono sound                                                                                                                                      |
| Audio Compression           | G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC                                                                                                        |
| Audio Bit Rate              | 64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC-LC)               |
| Audio Sampling Rate         | 8 kHz/16 kHz/32 kHz/48 kHz                                                                                                                      |
| Environment Noise Filtering | Yes                                                                                                                                             |
| Network                     |                                                                                                                                                 |
| Protocols                   | SNMP,SSL/TLS,IPv6,IGMP,DNS,SFTP,WebSockets,QoS,DDNS,SMTP,PPPoE,DHCP,WebSocket,FTP,NTP,HTTP,RTSP,IPv4,HTTPS,UPnP,RTP,TCP/IP,ICMP,802.1X,RTCP,UDP |
| Simultaneous Live View      | Up to 6 channels                                                                                                                                |

|                               |                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| API                           | ONVIF (Profile S, Profile G, Profile T),ISAPI,SDK,ISUP                                                                                                                                                                                                                                                                                                                                                   |
| User/Host                     | Up to 32 users<br>3 user levels: administrator, operator, and user                                                                                                                                                                                                                                                                                                                                       |
| Security                      | IP address filter, basic and digest authentication for HTTP/HTTPS, TLS 1.3, host authentication (MAC address), watermark, RTP/RTSP over HTTPS, complicated password, AES128/256, Password protection, WSSE and digest authentication for Open Network Video Interface, TLS 1.2, 802.1X authentication(EAP-LEAP,EAP-TLS,EAP-MD5,EAP-PEAP), control timeout settings, HTTPS encryption, security audit log |
| Network Storage               | NAS (NFS, SMB/CIFS)                                                                                                                                                                                                                                                                                                                                                                                      |
| Client                        | NVMS V3, LTS Connect, XVMS                                                                                                                                                                                                                                                                                                                                                                               |
| Web Browser                   | Plug-in free live view: Chrome 91+, Firefox 88+, Edge 91+, Safari 13+<br>Local service: Chrome 91+, Firefox 88+, Edge 91+                                                                                                                                                                                                                                                                                |
| <b>Image</b>                  |                                                                                                                                                                                                                                                                                                                                                                                                          |
| Image Parameters Switch       | Yes                                                                                                                                                                                                                                                                                                                                                                                                      |
| Image Settings                | Saturation, brightness, contrast, sharpness, gain, white balance, adjustable by client software or web browser                                                                                                                                                                                                                                                                                           |
| Day/Night Switch              | Day, Night, Auto, Schedule                                                                                                                                                                                                                                                                                                                                                                               |
| Image Enhancement             | BLC, HLC, 3D DNR, Distortion Correction, Defog                                                                                                                                                                                                                                                                                                                                                           |
| SNR                           | ≥ 52 dB                                                                                                                                                                                                                                                                                                                                                                                                  |
| Wide Dynamic Range (WDR)      | 130 dB                                                                                                                                                                                                                                                                                                                                                                                                   |
| Image Stabilization           | No                                                                                                                                                                                                                                                                                                                                                                                                       |
| Privacy Mask                  | 4 programmable polygon privacy masks                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Interface</b>              |                                                                                                                                                                                                                                                                                                                                                                                                          |
| Ethernet Interface            | 1 RJ45 10 Mbps/100 Mbps self-adaptive Ethernet port                                                                                                                                                                                                                                                                                                                                                      |
| On-Board Storage              | Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB                                                                                                                                                                                                                                                                                                                        |
| Built-in Speaker              | Max. power consumption: 2 W, max. sound pressure level: 10 cm: 110 dB.                                                                                                                                                                                                                                                                                                                                   |
| Audio                         | Built-in Microphone: Arrayed dual-microphone,<br>1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 KΩ, interface type: non-equilibrium,<br>1 output (line out), two-core terminal block, max. output amplitude: 3.3 Vpp, output impedance: 100 Ω, interface type: non-equilibrium                                                                          |
| Alarm                         | 1 input, 1 output (max. 24 VDC/24 VAC, 1 A)                                                                                                                                                                                                                                                                                                                                                              |
| Reset Key                     | Yes                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Event</b>                  |                                                                                                                                                                                                                                                                                                                                                                                                          |
| Basic Event                   | Motion detection (support alarm triggering by specified target types (human and vehicle)), video tampering alarm, exception, alarm input and output                                                                                                                                                                                                                                                      |
| Smart Event                   | Scene change detection                                                                                                                                                                                                                                                                                                                                                                                   |
| Linkage                       | Notify surveillance center, trigger alarm output, trigger recording, trigger capture, audible warning, send email                                                                                                                                                                                                                                                                                        |
| <b>Deep Learning Function</b> |                                                                                                                                                                                                                                                                                                                                                                                                          |
| Face Capture                  | No                                                                                                                                                                                                                                                                                                                                                                                                       |
| Perimeter Protection          | Line crossing, intrusion, region entrance, region exiting<br>Support alarm triggering by specified target types (human and vehicle)                                                                                                                                                                                                                                                                      |

| General                          |                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power                            | 12 VDC $\pm$ 25%, 1.67 A, max. 20 W, $\varnothing$ 5.5 mm coaxial power plug, reverse polarity protection,<br>PoE: IEEE 802.3at, Class 4, max. 24 W                                                                                                                                                                                                   |
| Material                         | Cover: metal, main body: metal                                                                                                                                                                                                                                                                                                                        |
| Dimension                        | $\varnothing$ 5.46" $\times$ 4.92" ( $\varnothing$ 138.6 mm $\times$ 125 mm)                                                                                                                                                                                                                                                                          |
| Package Dimension                | 6.69" $\times$ 6.69" $\times$ 6.30" (170 mm $\times$ 170 mm $\times$ 160 mm)                                                                                                                                                                                                                                                                          |
| Weight                           | Approx. 1.85 lb (840 g.)                                                                                                                                                                                                                                                                                                                              |
| With Package Weight              | Approx. 2.35 lb (1070 g.)                                                                                                                                                                                                                                                                                                                             |
| Storage Conditions               | -30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                                                             |
| Startup and Operating Conditions | -30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                                                             |
| General Function                 | Heartbeat, flash log, password reset via email, pixel counter, anti-banding                                                                                                                                                                                                                                                                           |
| Language                         | 33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian |
| Flashing Light                   | Red and Blue Light                                                                                                                                                                                                                                                                                                                                    |
| Approval                         |                                                                                                                                                                                                                                                                                                                                                       |
| EMC                              | CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021                                                                                                                                                                                                                              |
| Safety                           | CB: IEC 62368-1: 2014+A11,<br>CE-LVD: EN 62368-1: 2014/A11: 2017                                                                                                                                                                                                                                                                                      |
| Environment                      | CE-RoHS: 2011/65/EU,<br>WEEE: 2012/19/EU,<br>Reach: Regulation (EC) No 1907/2006                                                                                                                                                                                                                                                                      |
| Protection                       | IP67: IEC 60529-2013                                                                                                                                                                                                                                                                                                                                  |
| Anti-Corrosion Protection        | NEMA 4X (NEMA 250-2018)                                                                                                                                                                                                                                                                                                                               |

## ▪ Dimension

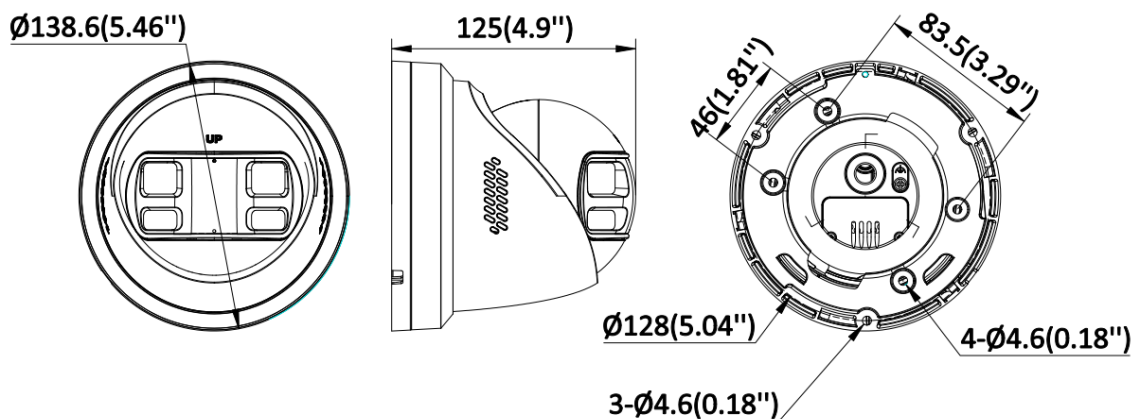


Unit: mm [inch]

▪ **Accessory**

▪ **Optional**

| LTB378                                                                            | LTB342-140                                                                        | LTB379                                                                            | LTB701                                                                              | LTB341                                                                              |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |

▪ **Installation Methods**

| Wall Mounting<br>LTB342-140                                                        | Vertical Pole Mounting<br>LTB378+ LTB342-140                                       |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|  |  |

