

5 MP TVI TURRET CAMERA WITH DUAL LIGHT CMHT1752-28LS




- High quality imaging with 5MP 2960 × 1665 resolution
- 2.8 mm fixed focal lens
- Provides bright night imaging with up to 40 meters of white light and 40 meters of IR distance
- Smart-Hybrid Light: Enhance your security with adaptable lighting options
- Active strobe light and audio alarm
- High-quality audio with audio over coaxial cable, integrated microphone, and built-in speaker
- Enables real-time communication with built-in two-way audio
- Water and dust resistant (IP67)

• Specification

Camera	
Image Sensor	5MP CMOS
Max. Resolution	2960 (H) × 1665 (V)
Min. Illumination	0.01 Lux @ (F1.6, AGCON), 0 Lux with IR
Shutter Time	PAL: 1/12.5 s to 1/50,000 s, NTSC: 1/15 s to 1/50,000 s
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360°
Signal System	PAL/NTSC
Lens	
Lens Type	2.8 mm fixed lens
Focal Length & FOV	2.8 mm, horizontal FOV: 112°, vertical FOV: 62°, diagonal FOV: 131°;
Lens Mount	M12
Microphone	
Pickup Distance	In a radius of up to 5 m
Amount	1
Speaker	
Rated Power	2 W
Speaker Range	In a radius of up to 5 m
Illuminator	
Supplement Light Type	Smart IR, White Light
Supplement Light Range	IR: Up to 40 m, White Light: Up to 40 m
Image	
Image Settings	Anti-banding, Brightness, Sharpness, Smart IR
Frame Rate	TVI: 5MP @10 fps/12.5 fps/20 fps/25 fps, 4 MP @25 fps/30 fps, 1080P @25 fps/30 fps
Day/Night Mode	Auto/Color
Wide Dynamic Range (WDR)	Digital WDR
Image Enhancement	DWDR, BLC, HLC, Global, HLS
Noise Reduction	2D DNR
White Balance	Auto, Manual
Audio	
Audio Function	Echo Cancellation, AI Noise Reduction, Automatic Gain Control
Interface	
Video Output	1 HD analog output
Alarm	Flashing Light Alarm (Red & Blue)
Built-in Microphone	Yes
Built-in Speaker	Yes

General	
Power	12 VDC \pm 25%, max. 9.6 W, *You are recommended to use one power adapter to supply the power for one camera. If a high-impedance cable is used (such as the 18 m extension cable in the kit package), a 15 VDC adapter is required.
Material	Main body: Metal; Enclosure: Plastic
Dimension	$\varnothing 110$ mm \times 102.7 mm ($\varnothing 4.33$ " \times 4.04")
Weight	Approx. 385 g (0.85 lb.)
Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F). Humidity 90% or less (non-condensing)
Language	English
Approval	
Protection	IP67

Dimension

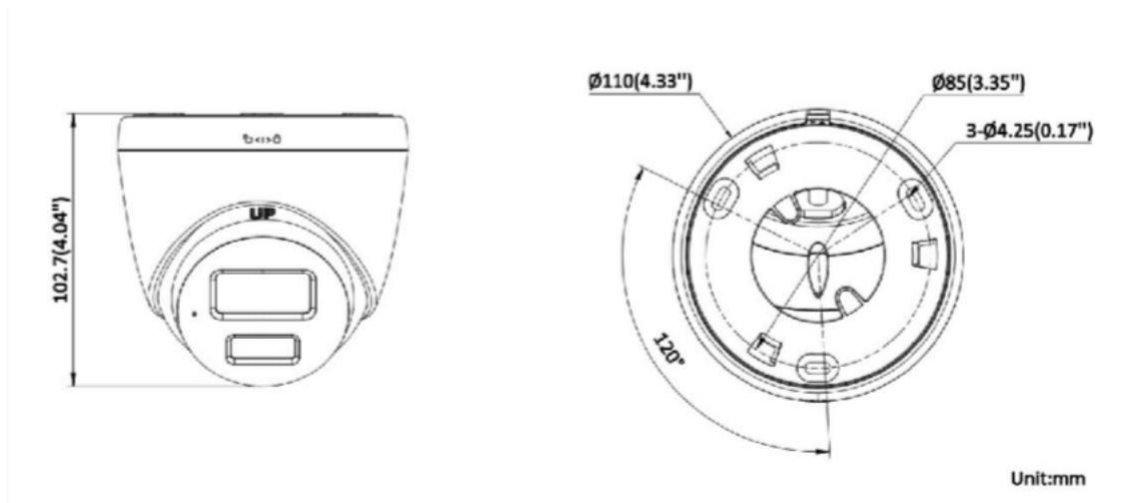

Accessory

LTB301 Wall mount	LTB378 Vertical pole mount	LTB379 Corner mount	LTB03-W Junction box
