

LXN7104-P4

NVR Lite Series

4CH 1 HDD NVR with 4CH PoE



Key Features


- SMART H.265+/H.264+/H.265/H.264 video Compression
- Up to 8 MP Resolution Recording
- 4 Independent PoE Network Interfaces
- Independent HDMI (4K, 3840 × 2160) and VGA
- AI by Camera: Face Detection, VCA, MD 2.0, License Plate Recognition
- Supports remote configuration and management of IPC, such as setting parameters, getting information, batch upgrading
- Supports Third-Party Network Cameras
- P2P remote management with PRO-X APP

Specification


LXN7104-P4

Video/Audio	
IP Video Input	4-ch
Recording Resolution	8MP; 6MP; 5MP; 4MP; 3MP; 1080p; 720p; D1; VGA; CIF
HDMI Output Resolution	4K (3840 × 2160), 1920 × 1080, 1280 × 1024, 1280 × 720
VGA Output Resolution	1920 × 1080, 1280 × 1024, 1280 × 720
Two-way Audio Input	1-ch, RCA
Audio Output	1-ch, RCA
Third-party Camera Access	ONVIF; RTSP
Decoding	
Decoding Format	Smart Encoding; H.265; H.264; H.264H; H.264B; MJPEG
Live View/Playback Resolution	8MP; 6MP; 5MP; 4MP; 3MP; 1080p; 720p; D1; VGA; CIF
Decoding Capability	2-ch @ 8MP/ 8-ch @ 1080p
Synchronous Playback	1, 4 views
Intelligent	
MD 2.0	4-ch, IMD by Camera
VCA	4-ch, Line Crossing by Camera
Face Detection	4-ch, Face Detection by Camera
License Plate Recognition	4-ch, LPR by Camera
Smart Search	Search by target classification, pictures by channel, time and event type
Network	
Incoming Bandwidth	80 Mbps
Outgoing Bandwidth	60 Mbps
Network Protocol	HTTP; HTTPS; TCP/IP; IPv4/IPv6; UPnP; SNMP; RTSP; UDP; SMTP; NTP; DHCP; DNS; DDNS
Network Interface	1, RJ-45 10/100 Mbps self-adaptive Ethernet Interface
PoE Interface	4, RJ-45 10/100 Mbps self-adaptive Ethernet interface
PoE Standard	IEEE 802.3 af/at
Mobile Phone Access	PRO-X
Auxiliary Interface	
SATA	1 SATA interface
Capability	Up to 10 TB for each hard disk
USB Interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 2.0
General	
Power Supply	48 V/53 VDC, 1.25 A/1.13 A
Power Consumption	< 10 W (HDD not included,) Total output power of PoE is 36W, the maximum output power of a single port is 25.5W
Working Temperature	-10 °C to +55 °C (+10 °F to +131 °F)
Working Humidity	10% to 93%
Product Dimensions	260.0 mm × 233.2 mm × 43.7 mm (10.24" × 9.18" × 1.72")(W × L × H)
Weight	1.85 kg (4.08 lb), without HDD
Certifications	FCC: Part 15 Subpart B

Dimensions (mm[inch])

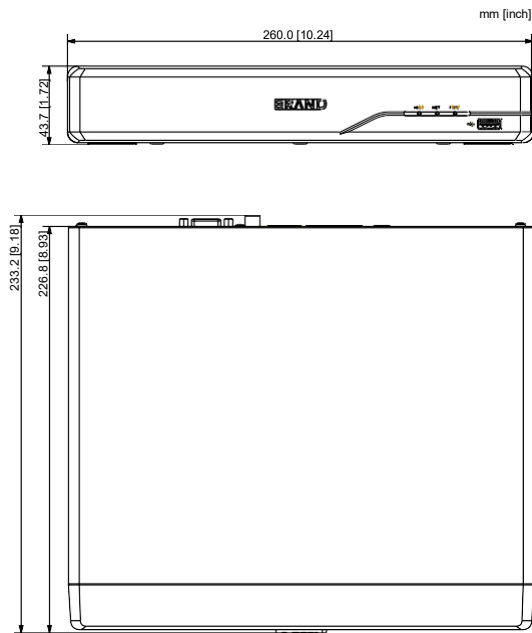

Physical Interface

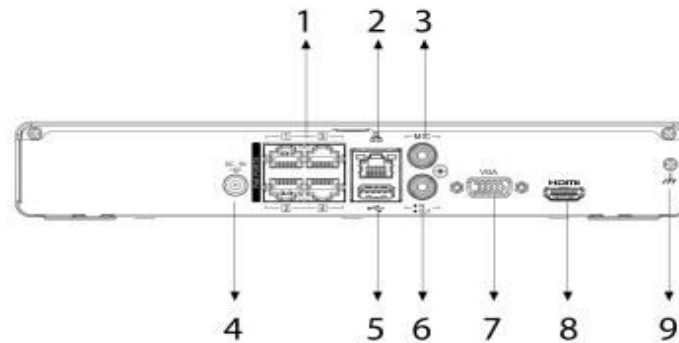

No.	Description	No.	Description
1	PoE Ports	6	AUDIO OUT, RCA Connector
2	LAN Network Port	7	VGA Port
3	AUDIO IN, RCA Connector	8	HDMI Port
4	Power Supply	9	Ground
5	USB Ports		