


WH-CI3020


2MP IR Mini Bullet Camera

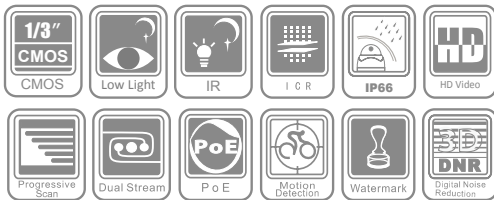

Key features

- 2.0 megapixel high resolution
- Full HD 1080P real-time video
- Region of Interest(ROI)
- 3D DNR & DWDR & BLC
- IP66 rating
- IR range: up to 100ft(30m)
- IR cut filter with auto switch

Dimensions

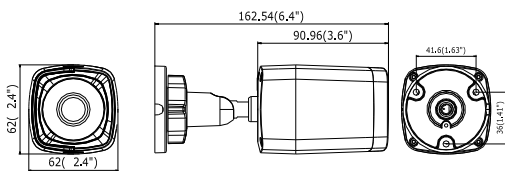

WH-CI3020	
Camera	
Image sensor	1/3" sensor
Min. illumination	0.07 lux @F1.2, AGC ON, 0 lux with IR
Shutter time	1/25s ~ 1/100,000s
Lens	4mm @F2.0 Angle of view: 79°
Lens mount	M12
Day & night	IR cut filter with auto switch
Digital noise reduction	3D DNR
Compression Standard	
Video compression	H.264 / MJPEG
Bit rate	32 Kbps ~ 8Mbps
Dual Stream	Yes
Image	
Max. Image Resolution	1920 × 1080
Frame rate	60Hz: 30fps (1920 × 1080), 30fps (1280 × 960), 30fps (1280 × 720) 50Hz: 25fps (1920 × 1080), 25fps (1280 × 960), 25fps (1280 × 720)
Image settings	Rotate mode, Saturation, Brightness, Contrast adjustable by client software or web browser
BLC	Yes,zone optional
ROI	Support
Network	
Network storage	NAS
Alarm trigger	Motion detection, tampering alarm, network disconnect , IP address conflict,storage exception
Protocols	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP, PPPoE,NTP,UPnP,SMTP,SNMP,IGMP,802.1X,QoS,IPv6,Bonjour
Interoperability	ONVIF, PSIA, CGI, ISAPI
Security	User Authentication, Watermark
Interface	
Communication interface	1 RJ45 10 M / 100 M Ethernet interface
Reset Button	Yes
General	
Operating conditions	-22° F ~ 140° F(-30° C ~ 60° C) humidity 95% or less (non-condensing)
Power supply	12 VDC ± 10% , PoE (802.3af)
Power consumption	Max. 7W
Weather proof rating	IP66
IR range	Up to 100ft(30m)
Dimension	2.4" × 2.4" × 6.4" (62.0 x 62.0 x 162.5mm)
Weight	0.7lbs(300g)