

# LTB373PM


## Pendent Mounting Bracket In/Outdoor



### Features:


- Aluminum alloy material with surface spray treatment
- General design for indoor/outdoor
- Design of cable entrance hole
- Better waterproof with rubber pad design
- With safety rope, the assembling is safer and more convenient

### Dimension:

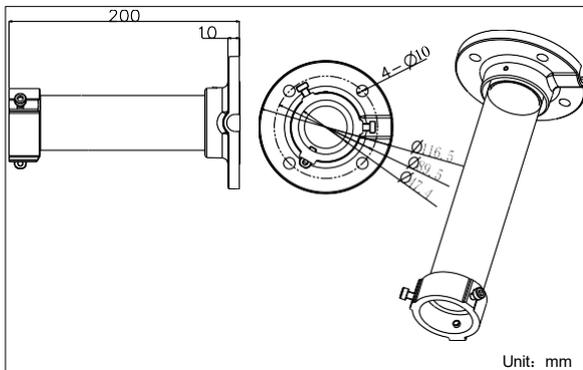


### Installation steps:

- ① Choose the appropriate wall to mount the ceiling, and rubber blanket should be added when assembling outdoors




A: Waterproof rubber blanket

- ③ Fasten the safety rope, thread the line and assemble the speed dome




C: Safety rope hook

- ② Twist and fix the screwed pipe after threading



B: Screw hole

- ④ Fasten the snap joint fixing screw



**Note:** The figure of Speed Dome in "Installation Step" is only for your reference; please adhere to our real products.

### Order model:

LTB373PM

### Parameters:

Model	LTB373PM
Parameter	Pendent Mounting Bracket In/Outdoor
Color	White
Feature	Suitable for speed dome pendent mounting
Material	Aluminum alloy
Dimension	Φ116.5 × 200mm
Weight	600g

### Notice:

- Pay attention to the color matching when selecting bracket
- The bracket should be installed on the flat surface of a wall
- The wall must be capable of supporting more than 3 times the total load of the camera and the mount.
- The maximum load capacity of the mount is 30KG