

8MP Dual light
Vari-focal Dome Network Camera

LXIP7783WE-SDZ

Key Features

- Max.8MP Resolution
- Maximum 20fps @ 8MP (3840 × 2160)
- 1/2.7" CMOS and F1.5 aperture
- Built-in warm white lights and IR lights, and the max. illumination distance is 200ft
- VCA with Line Crossing and Intrusion by AI algorithm
- MD2.0 focus on Human and Vehicle
- Built in MIC
- Built-in Micro SD card slot, up to 256 GB
- 12V DC and PoE
- IP67


Specification

Camera	
Image Sensor	1/2.7" CMOS
Min. Illumination	0.007 Lux @ F1.5 (Color), 0.0007 Lux @ F1.5(B/W)
E-shutter Speed	Auto/Manual 1/3 s–1/100,000 s
S/N Ratio	> 56 dB
Noise Reduction	3D NR
Wide Dynamic Range	120 dB
Day & Night	Color/B/W
Angle Adjustment	Pan and Rotation: 0°-355° Tilt: 0°-80°
Lens Type	Motorized Vari-Focal, 2.7-13.5mm at F1.5
Iris Type	Auto
Field of View	Horizontal: 114°–32° Vertical: 58° - 17° Diagonal: 138° - 36°
Close Focus Range	2.62 ft (0.8 m)
DORI	Detect: 85.0 m – 279.5 m (278.87 ft – 916.99 ft) Observe: 33.9 m – 111.8 m (111.22 ft – 366.80 ft) Recognize: 16.9 m – 55.8 m (55.45 ft – 183.07 ft) Identify: 8.3 m – 27.8 m (27.23 ft – 91.21 ft)
Illuminators	2 x Warm white Lights, 2 x IR Lights
Illumination Range	Up to 200 ft
Illuminator Control	Auto, Manual, Off, Zoom Priority
Video	
Video Compression	H.265; H.264; MJPEG (Sub Stream Only)
Resolution	8MP (3840*2160), 6MP (3072*2048), 5MP (3072*1728), 5MP (2880*1620), 4MP (2688*1520), 3MP (2048*1536), 3MP (2304*1296), 1080P (1920*1080), 1.3MP (1280*960), 720P (1280*720), D1 (704*480), VGA (640*480), CIF (352*240)
Maximum Frame Rate	Main stream: 8MP (3840*2160) at 20 fps, 4MP (2688*1520) / 30 fps Sub stream: D1 (704*576) / 30 fps
Video Stream	2 streams
Bit Rate Control	CBR, VBR
ROI	Supported (4 areas)
Image Rotation	0°, 90°, 180° and 270° (90° and 270° only for 2688 × 1520 resolution and lower)
Mirror	Supported
Privacy Mask	Supported (4 areas)
Audio	
Built-in MIC	Yes
Audio Compression	PCM, G.711a, G.711Mu
Intelligent Analysis	
VCA (Video Content Analytics)	Intrusion, Line Crossing
MD2.0	Supported
Event	
Alarm Event	Line Crossing, Intrusion, Motion Detection, MD2.0, Audio Detection, Video Tampering, Disk Full, Disk Error, Offline, IP conflict, Voltage Detection, Security Warning
Network	

Protocol	IPv4, IPv6, DNS, TCP, UDP, DHCP, HTTP, HTTPS, 802.1X, RTSP, DDNS, P2P, SMTP, RTMP, PPPoE, UPnP, Bonjour, QoS, Auto Registration, ICMP, IGMP, FTP, SFTP, RTP, RTCP, ARP, NTP, Multicast, NFS
Interoperability	ONVIF (Profile S & Profile G & Profile T); CGI
Storage	FTP, SFTP, Micro SD card (support max. 256 GB), NAS
Web Browser	Chrome, Firefox
PC client	X Station
Mobile APP	Pro-X Next
Interface	
Network port	RJ-45 (10/100 Base-T)
Micro SD card Slot	Yes
Audio I/O	1 x Input, 1 x Output
Alarm I/O	1 x Input (Max. 5 VDC, 5 mA), 1 x Output (Max. 12 VDC, 300 mA)
Reset Button	Supported
General	
Power Supply	12 VDC / PoE (802.3af)
Power Consumption	12 VDC: Max 6.9W, Typical 2.6W / PoE: Max 8.3W, Typical 3.3W
Housing	Cover: Metal, Dome: Plastic
Dimensions	Φ 4.96"*3.94" (Φ 126.0 mm*100.0 mm)
Dimensions With Box	5.83''x5.47''x5.39'' (148mmx139mmx137mm) (L*W*H)
Operating Conditions	-40°C to +60°C (-40°F to +140°F)/less than 95% RH
Storage Conditions	-40°C to +60°C (-40°F to +140°F)
Protection Grade	IP67
Net Weight	1.3lb (0.58 kg)
Gross Weight	1.6lb (0.74 kg)
Certification	FCC

Dimensions (mm[inch])

mm [inch]

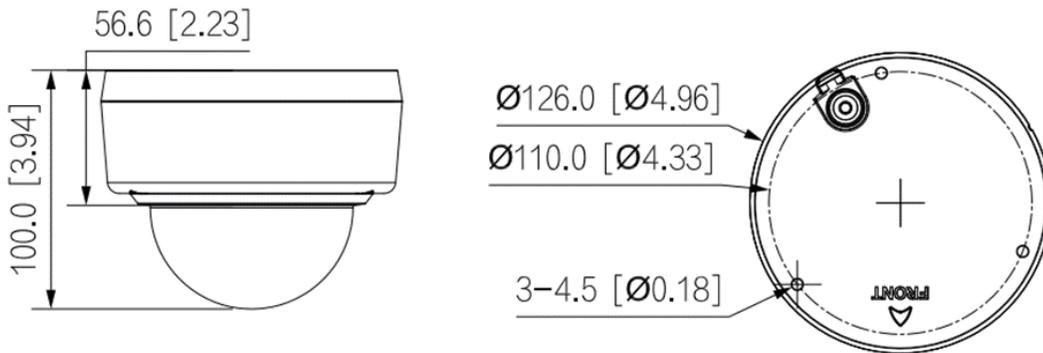

Accessories

LXJB02 Junction Box	LXWM01 Wall Mount	LXWM01& LXPM01 Vertical Pole Mount	LXKPD01(1)&LXKPD01(2) &LXPM02 Horizontal Pole Mount	LXKPD01(1) & LXKPD01(2) Pendant Mount	LXKPD01(1) & LXKPD01(2) &LXCM01 Corner Mount