




DEFENDAS



Video Solutions for Security Professionals™

SENTINEL SERIES

Access Control Panels with built-in Web Application - No software

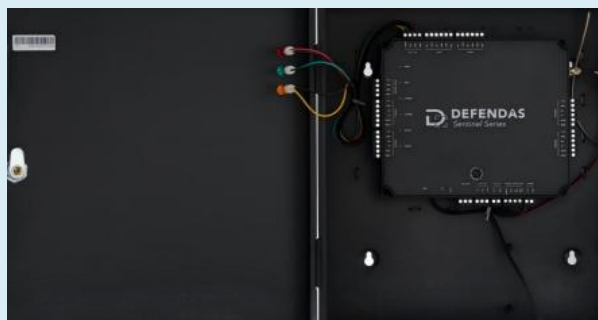

State-of-the-art 2 and 4 doors access control panels with built-in Web Application eliminate the need for management software.

Advanced Access Control Features

No software required. The built-in web application provides advanced access control features including User Enrollment & Management, Door Control & Monitoring, Lockdown, Reporting, Maps, Anti-Passback, First Card Opening, Multi-Card Opening, Card Design, and Duress PINs.

Door Control and More

User-programmable auxiliary relays can be used to control lights, alarms, annunciators, intrusion detection panels, additional locking devices, or any other external electrical device that can be controlled by a switch.

Capacity

One primary panel can support up to 20 secondary panels. A maximum of 84 doors can be supported when using all 21 panels. Each Sentinel Series panel can store up to 5,000 users and 10,000 transactions, plus unlimited archive downloads.

Communication

Sentinel Series panels communicate securely over wired and wireless TCP/IP networks using SSL/TLS. Supported browsers include Google Chrome, Mozilla Firefox, and Microsoft Edge.

Power

Sentinel Series uses a 12V DC 3A power supply and also supports Power over Ethernet (PoE).

Lowest Total Cost of Ownership

Sentinel Series panels come in several models to suit different project needs and reduce the cost of unused capacity. The easy-to-use embedded web application gets systems up and running quickly. Firmware is field-upgradable, allowing the system to stay current with the latest features and security enhancements.

Choice of Readers

Sentinel Series supports any 3rd-party readers that communicate with Wiegand or OSDP communication protocols.



Specifications


Model	ST200B	ST400B
Number of Doors Controlled	Two Doors	Four Doors
Number of Readers Supported	4 (Wiegand or OSDP Readers)	8 (Wiegand or OSDP Readers)
Types of Readers Supported	3rd party 125kHz & 13.56MHz Wiegand, OSDP readers	3rd party 125kHz & 13.56MHz Wiegand, OSDP readers
Number of Inputs	5 (2 Exit Buttons, 2 Door Sensors, 1 Aux)	5 (2 Exit Buttons, 2 Door Sensors, 1 Aux)
Number of Output	3 (2 Form C relays for locks and 1 Form C relay for Aux output)	5 (4 Form C relays for locks and 1 Form C relay for Aux output)
User Capacity	5,000	5,000
Events Database Capacity	10,000 transactions plus unlimited archive downloads	10,000 transactions plus unlimited archive downloads
Weight	10 lbs (4 kg)	10 lbs (4 kg)
Communication	TCP/IP, Wi-Fi, Wiegand, OSDP	TCP/IP, Wi-Fi, Wiegand, OSDP
Browsers Supported	Chrome, Firefox, Edge	Chrome, Firefox, Edge
Enclosure	Powder Coated Aluminum	Powder Coated Aluminum
Mounting	Wall Mount	Wall Mount
Recommended Power Supply	12V DC, 3A (PoE)	12V DC, 3A (PoE)
Dimensions (Bundle Only)	14.41in. X 2.96in. X 13.00in. 366mm(L) X 75mm(W) X 330mm(H)	14.41in. X 2.96in. X 13.00in. 366mm(L) X 75mm(W) X 330mm(H)
Dimensions (Board Only)	7.75in. X 6.73in. (197mm X 171mm)	7.75in. X 6.73in. (197mm X 171mm)



DEFENDAS



Video Solutions for Security Professionals™

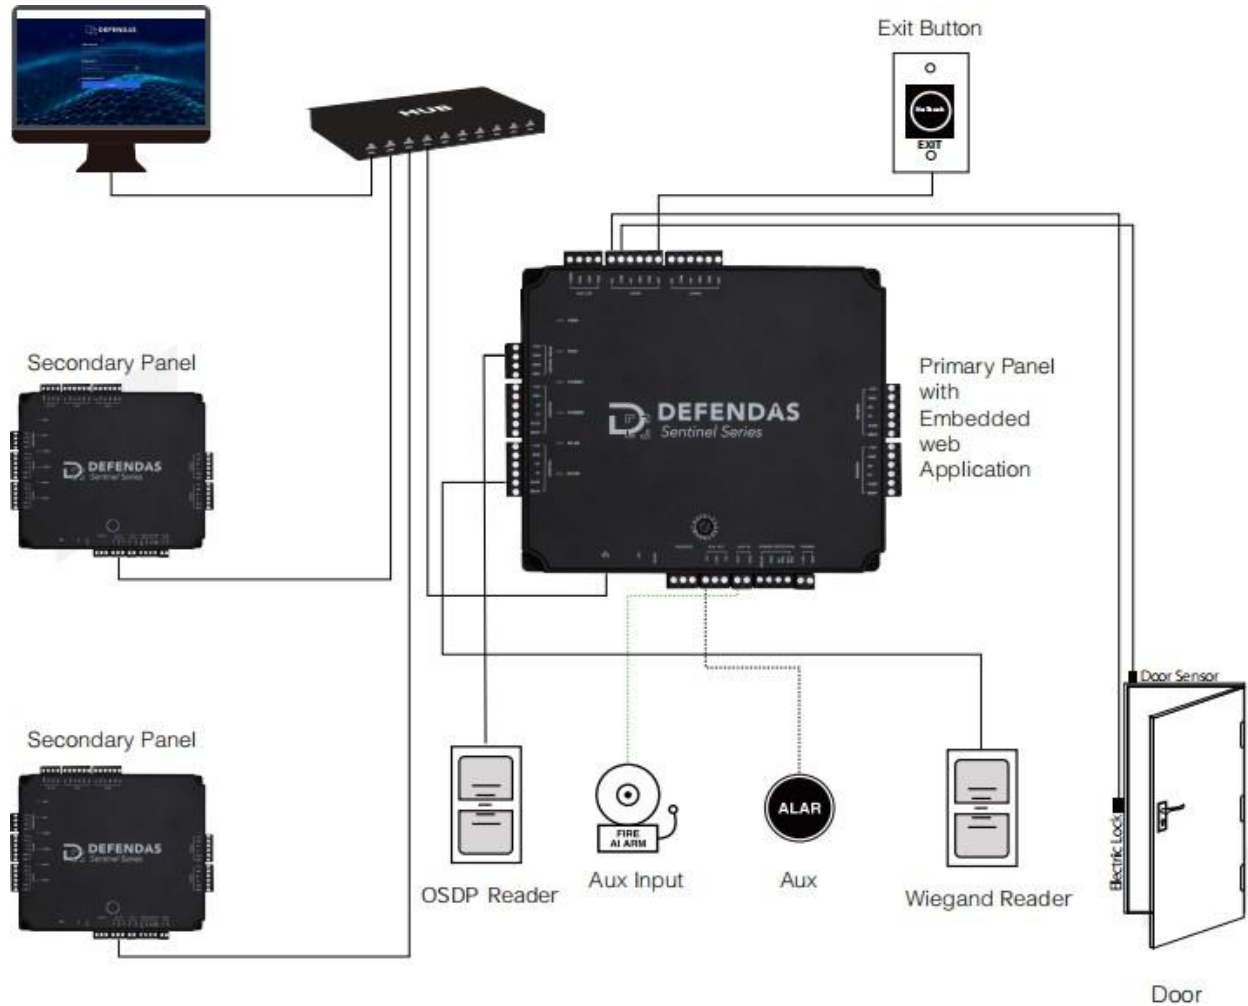

[SENTINEL] SERIES

LT Security Inc.

17333 Freedom Way City of Industry, CA 91748

Phone: (626) 435-2838 • Fax: (626) 435-2815 • sales.ca@ltsecurityinc.com • www.ltsecurityinc.com

© Copyright 2025, LT Security Inc.
All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners.
All specifications are subject to change without notice. All rights reserved.

