

## CMHT1722-28LS

### Platinum 2 MP Fixed Turret TVI Camera with Two-Way Audio & Siren




- High quality imaging with 2 MP, 1920 × 1080 resolution
- 2.8 mm fixed focal lens options
- Up to 40 m IR distance for bright night imaging
- Up to 40 m visible (white) light distance for bright night imaging
- Smart-Hybrid Light, optimize your security with flexible lighting options
- Active strobe light and audio alarm
- High quality audio over coaxial cable, built-in microphone and speaker
- Real-time security via built-in two-way audio
- Water and dust resistant (IP67)

## Specifications

Camera	
Image Sensor	2 MP CMOS
Max. Resolution	1920 (H) × 1080 (V)
Min. Illumination	0.01 Lux @ f 1.6, AGC on; 0 Lux with Supplemental (White) Light
Shutter Speed	PAL: 1/12.5 to 1/50,000 sec.   NTSC: 1/15 to 1/50,000 sec.
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360°
Signal System	PAL / NTSC
Lens	
Lens Type	2.8 mm
Focal Length & FOV	2.8 mm; Horizontal FOV: 105°, vertical FOV: 59°, diagonal FOV: 127°;
Lens Mount	M12
Microphone	
Pickup Distance	Up to 16.4 ft (5 m) radius
Number	1
Speaker	
Rated Power	2 W
Speaker Range	Up to 16.4 ft (5 m) radius
Supplemental Lighting	
Type	IR, Supplemental White Light
Range	IR: Up to 131.2 ft (40 m)   Supplemental Light: Up to 131.2 ft (40 m)
Imaging	
Image Settings	Anti-banding Brightness Sharpness Smart IR
Frame Rate	TVI: 1080p, PAL @ 25fps & NTSC @ 30fps
Day / Night Mode	Auto / Color / B&W
Wide Dynamic Range (WDR)	Digital WDR
Image Enhancements	DWDR BLC HLC Global HLS
Noise Reduction	2D DNR
White Balance	Auto, Manual
Audio	
Audio Functions	Acoustic Echo Cancel, Automatic Noise Suppression, Automatic Gain Control
Interface	
Video Output	1 x HD analog output

Deterrence Features	Flashing Light Alarm (Red & Blue)
Built-in Microphone	Yes
Built-in Speaker	Yes
<b>General</b>	
Power	12 V DC $\pm$ 25%, max.8.5 W
Materials	Main body: Metal; Enclosure: Plastic
Dimensions	$\varnothing$ 4.33 $\times$ 4.04" ( $\varnothing$ 110 $\times$ 102.7 mm)
Weight	Approx. 0.85 lb (385 g)
Operating Conditions	-40° to 140° F (-40° to 60° C). Humidity 90% or less (non-condensing)
Language	English
<b>Certifications</b>	
Protection Rating(s)	IP67

## Dimensions

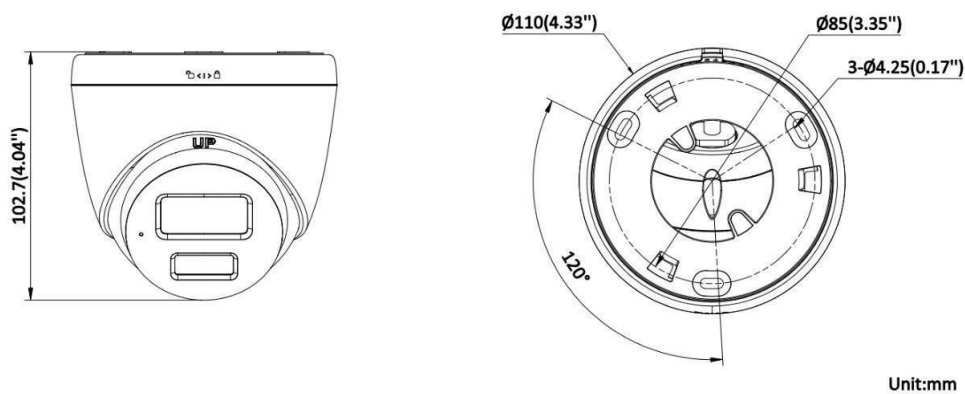

## Accessories (Optional)

LTB301 Wall Mount	LTB342-JBOX Junction Box	LTB03-W Junction Box	LTB03-B Junction Box
			
LTB307 Junction Box	LTB371 Pendant Mount	LTB378 Vertical pole mount	LTB379 Corner mount
			

