

## LTN8716D-P16N

### Platinum MD 2.0 / VCA NVR

#### Key Features

- Up to 16 IP camera inputs, plug & play with 16 power-over-Ethernet (PoE) interfaces
- H.265+ / H.265 / H.264+ / H.264 video formats
- Up to 2 ch @ 12 MP, 3 ch @ 8 MP, 6 ch @ 4 MP, or 12 ch @ 1080p decoding capacity
- Up to 160 Mbps incoming bandwidth
- Provides MD 2.0 / VCA functionality from the NVR



#### Smart Functions

- All channels support MD 2.0
- 1 facial recognition channel for video stream
- Smart search for a selected area in the video, and smart playback improves playback efficiency

#### Professional and Reliable

- H.265+ compression effectively reduces the storage usage by up to 75%
- Streams over TLS encryption technology for more secure transmission service

#### HD Video Output

- Provides independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

#### Storage and Playback

- Up to 2 x SATA interfaces for HDD connection (up to 10 TB storage capacity per HDD)
- 16 channels of synchronous playback

#### Network & Ethernet Access

- 16 x independent PoE network interfaces
- 1 x self-adaptive 10/100/1000 Mbps Ethernet interface
- LTS Connect for easy network management


## Specifications

Facial Recognition	
Facial Recognition Capabilities	Face image comparison, human face capture, face image search
Face Image Library	Up to 16 image libraries, with up to 20,000 face images in total (each picture ≤ 4 MB; total capacity ≤ 1 GB)
Facial Recognition and Analytics Performance by NVR	MAX 1 channel for human face capture * Performed without a compatible face capture camera
Face Picture Comparison by camera (Captured from Camera)	MAX 4 channels for face image comparison alarm
Motion Detection 2.0	
Human / Vehicle Analysis	16 channels
Video and Audio	
IP Video Input	16 ch
Incoming Bandwidth	160 Mbps
Outgoing Bandwidth	160 Mbps
HDMI Output	1 channel: <b>4K</b> : 3840 × 2160 @ 30 Hz; <b>2K</b> : 2560 × 1440 @ 60 Hz, 1920 × 1080 @ 60 Hz, 1600 × 1200 @ 60 Hz, 1280 × 1024 @ 60 Hz, 1280 × 720 @ 60 Hz, 1024 × 768 @ 60 Hz
VGA Output	1 channel: 1920 × 1080 @ 60 Hz, 1280 × 1024 @ 60 Hz, 1280 × 720 @ 60 Hz
Video Output Mode	HDMI / VGA independent output
CVBS Output	N/A
Audio Output	1 ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)
Two-Way Audio	1 ch, RCA (Linear, 1 KΩ)
Decoding	
Format	H.265 / H.265+ / H.264+ / H.264
Recording Resolution	3, 4, 5, 6, 8, 12 MP / 1080p / UXGA / 720p / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF
Synchronous Playback	16 channels
NVR Decoding Capability	MD 2.0 / VCA On: <b>1 ch</b> : 12 MP @ 30 fps; <b>2 ch</b> : 8 MP @ 30 fps; <b>4 ch</b> : 4 MP @ 30 fps; <b>8 ch</b> : 1080p @ 30 fps MD 2.0 / VCA Off: <b>2 ch</b> : 12 MP @ 30 fps; <b>3 ch</b> : 8 MP @ 30 fps; <b>6 ch</b> : 4 MP @ 30 fps; <b>12 ch</b> : 1080p @ 30 fps
Stream Type	Video, Video & Audio
Audio Compression	G.711 ulaw / G.711 alaw / G.722 / G.726 / AAC
Network	
Remote Connections	128
Network Protocols	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS


Network Interface	1 x RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
<b>PoE</b>	
Interface	16 x RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 200 W
Standard	IEEE 802.3 af/at
<b>Auxiliary Interface</b>	
SATA	2 x SATA interfaces
Capacity	Up to 10 TB storage capacity for each HDD
USB Interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 2.0
Alarm In/Out	4/1
<b>General</b>	
Power Supply	100 to 240 VAC, 50 to 60 Hz
Consumption	≤ 15 W (without HDD and PoE off)
Operating Temperature	14° to 131° F (-10° to 55° C)
Operating Humidity	10% to 90%
Dimensions (W × D × H)	15.2 × 12.4 × 2.0 in. (385 × 315 × 52 mm )
Weight (without HDD)	≤ 6.6 lbs (3 kg)
<b>Certifications</b>	
FCC	Part 15 Subpart B, ANSI C63.4-2014
CE	EN 55032: 2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4, EN 55035: 2017

**Note:** NVR facial recognition and MD 2.0 cannot be enabled at the same time.

## Dimensions (mm)

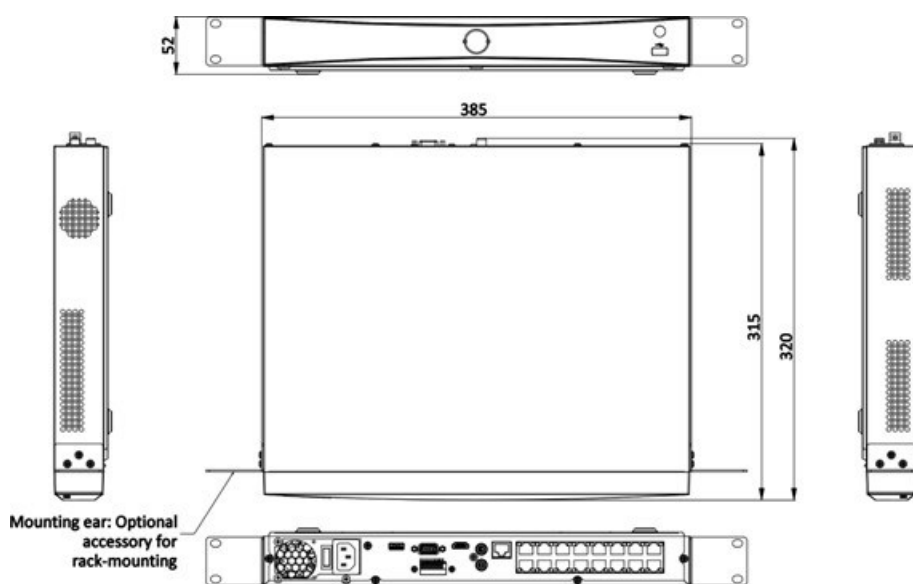

## Physical Interface

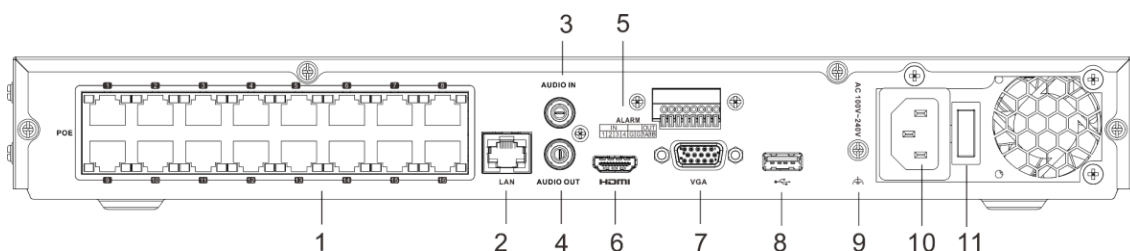

No.	Description	No.	Description
1	Network interfaces with PoE function	7	VGA interface
2	LAN network interface	8	USB interface
3	Audio In	9	GND
4	Audio Out	10	Power supply
5	Alarm In and Out	11	Power switch
6	HDMI interface		