

DS-2CE56D1T-(A)VFIR

HD 1080P Indoor Varifocal IR Dome Camera

- 1/2.7" (2 MP) High-Performance CMOS
- Analog HD Output, Up to 1080p Resolution
- 2.8 mm to 12 mm Varifocal Lens
- True Day/Night, Smart IR
- Up to 98 ft (30 m) IR Distance
- OSD Menu
- 24 VAC (-A) / 12 VDC
- Up-the-Coax (HIKVISION-C Protocol)




Hikvision 2CE56D1T-(A)VFIR Indoor Varifocal IR Dome Cameras are a versatile solution for all of your security needs. They feature a wide range viewing angle that captures images with a resolution of 1080p at up to 30 fps. The Indoor Varifocal Dome Network Camera supports the Hikvision-Up-the-Coax protocol and is equipped with an IR lamp with a range of up to 98 ft (30 m), which facilitates night recording.

Available models:

DS-2CE56D1T-(A)VFIR
DS-2CE56D1T-(A)VFIRB

Dimensions

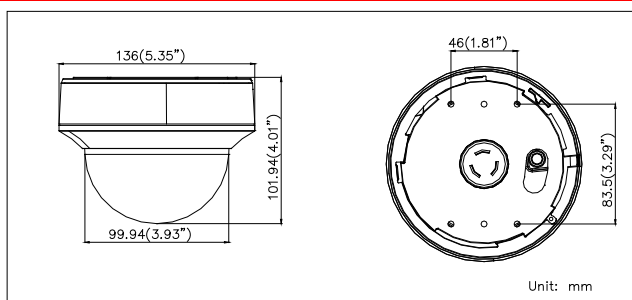

DS-2CE56D1T-(A)V FIR	
Camera	
Image Sensor	1/2.7" (2 MP) CMOS image sensor
Signal System	PAL/NTSC
Effective Pixels	1984 (H) x 1105 (V)
Minimum Illumination	0.01 lux @ (f/1.2, AGC on), 0 lux with IR; 0.014 lux @ (f/1.4, AGC on), 0 lux with IR
Shutter Speed	1/25 (1/30) s to 1/50,000 s
Lens	2.8 mm to 12 mm @ f/1.4
	Angle of view: 105.2° to 32.8°
Lens Mount	φ14
Day/Night	ICR
3-Axis Positioning	Pan: 0 to 355°, tilt: 0 to 75°, rotation: 0 to 355°
Synchronization	Internal synchronization
Video Frame Rate	1080p @ 25 fps/1080p @ 30 fps (PAL/NTSC)
HD Video Output	1 analog HD-TVI output
S/N Ratio	> 62 dB
Menu	
AGC	High/medium/low/off
D/N Mode	Smart IR/color/BW
White Balance	Auto/manual
BLC	Supported
Language	English
Functions	Digital noise reduction, mirror
AGC	High/medium/low/off
General	
Operating Conditions	-4° to 113° F (-20° to 45° C), humidity 90% or less (non-condensing)
Power Supply	24 VAC ±15%, 12 VDC ±15%, -A: 12 VDC ±15%
Power Consumption	Maximum 3 W, -A: maximum 4 W
IR Range	Up to 30 m
Communication	Up-the-Coax Protocol: HIKVISION-C (TVI output)
Dimensions	Φ136 × 101.94 mm (Φ5.35" × 4.01")
Weight	1.32 lbs (600 g)

Accessories

 <p>PM Pole mount</p>	 <p>WMS + PC130 Wall mount</p>	 <p>WML + PC130 Wall mount with junction box</p>	 <p>CPM + PC130 Pendant mount</p>
 <p>RCM-3 In-ceiling mount</p>	 <p>CM Corner mounting</p>	 <p>DS-1H18 Video balun</p>	 <p>X41T Camera tester</p>