

LTN8916D-P16N

Platinum MD 2.0 / VCA NVR



- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on deep learning algorithm
- Up to 4-ch VCA
- Up to 4-ch facial recognition for video stream
- Up to 8-ch facial recognition for face picture
- Up to 16-ch IP camera inputs
- Up to 32-ch 1080p decoding capability
- Up to 8-ch IP speakers can be connected

▪ Function

Compression and Recording

- H.265+ compression effectively reduces the storage space by up to 75%
- Full channel IP cameras connection
- Compatible to third-party network cameras

HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

Storage and Playback

- Up to 4 SATA interfaces for HDD connection
- 16-ch synchronous playback

Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Smart search for the selected area in the video, and smart playback to improve the playback efficiency
- POS information overlay on live view and playback
- POS triggered recording and alarm

Network & Ethernet Access

- 1 self-adaptive 10/100/1000 Mbps Ethernet interfaces
- LTS Connect & DDNS (Dynamic Domain Name System) for easy network management


▪ Specification

| Intelligent Analytics | |
|--|---|
| AI by NVR | Facial recognition, VCA, motion detection 2.0 * The NVR's built-in facial recognition feature cannot be used simultaneously with Direct Search or VCA. |
| AI by Camera | Facial recognition, VCA, video structuralization, throwing objects from building, motion detection 2.0, ANPR, people counting, VCA |
| Engine | 1, engine mode is adjustable |
| Facial Recognition | |
| Facial Detection and Analytics | Face picture comparison, human face capture, face picture search |
| Face Attributes | Wearing glasses, wearing a mask, facial expression, body temperature |
| Face Picture Library | Up to 16 face picture libraries, with up to 50,000 face pictures in total (each picture ≤ 512 KB, total capacity ≤ 1 GB) |
| Face Picture Comparison (Captured from Camera) | MAX 8-ch, require a compatible face detection cameras |
| Facial Detection and Analytics Performance | Supports human face capture with HD network camera: up to 4-ch at 1080P, 2-ch at 4MP, or 1-ch at 8MP (H.264/H.265 supported). * Performed without a compatible face detection camera |
| Motion Detection 2.0 | |
| By NVR | All channels for Platinum cameras |
| By Camera | All channels |
| VCA | |
| By NVR | 4-ch, 2 MP (H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm; Up to 12 rules in total |
| By Camera | All channels |
| ANPR | |
| By Camera | All channels |
| Vehicle Attributes | Plate number, license plate color, license plate type |
| Plate Attributes | Vehicle brand, vehicle color, vehicle type |
| Video and Audio | |
| IP Video Input | 16-ch |
| Incoming Bandwidth | 160 Mbps |
| Outgoing Bandwidth | 256 Mbps |
| HDMI 1 Output | 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz |
| HDMI 2 Output | 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz |
| VGA Output | 1920 × 1080/60 Hz |
| Video Output Mode | HDMI1/VGA simultaneous output, HDMI2 independent output |
| CVBS Output | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480 |
| Audio Output | 1-ch, RCA (Linear, 1 KΩ) |
| Two-Way Audio | 1-ch, RCA (2.0 Vp-p, 1 KΩ) |
| Decoding | |
| Decoding Format | H.265+/H.265/H.264+/H.264 |

| | |
|----------------------------|--|
| Recording Resolution | 32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF 32MP/24MP/12MP/8MP/7MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/D CIF/2CIF/CIF/QCIF *: The NVR supports up to 4-ch 32 MP/24 MP IP video inputs. |
| Synchronous Playback | 16-ch |
| Decoding Capability | Enable AI by NVR: 20-ch@1080p (30 fps) Disable AI by NVR: 32-ch@1080p (30 fps) |
| Dual-Stream Recording | Support |
| Stream Type | Video, Video & Audio |
| Live View Window Division | 1/2/4/6/8/9/16 |
| Aux Port Window Division | 1/2/4/6/8/9/16 |
| Audio Compression | G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM |
| Network | |
| Network Interface | 1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface 1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface |
| Remote Connection | 128 |
| Network Protocol | TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS, ONVIF(Version 2.2), OTAP |
| API | ONVIF (profile S/G); SDK; ISAPI |
| Compatible Browser | IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version |
| Camera Access Protocol | ONVIF(Version 2.5), RTSP |
| PoE | |
| Interface | 16, RJ-45 10/100 Mbps self-adaptive Ethernet interface |
| Power | ≤ 200 W |
| Standard | IEEE 802.3 af/at |
| Auxiliary Interface | |
| Serial Interface | 2 RS-485 (half-duplex), 1 RS-232 |
| SATA | 4 SATA interfaces |
| eSATA | 1 eSATA interface |
| Capacity | Up to 16 TB capacity for each disk |
| Alarm In/Out | 16/9 |
| USB Interface | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0 |
| Ctrl 12V | Controllable 12 VDC, 0.5 A power output for external alarm device; The power will be turned on when the alarm output is triggered. *: The Ctrl 12V power is controlled by alarm output 9. |
| DC 12V | 12 VDC, 1 A power output |
| General | |
| GUI Language | English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian, Hebrew |
| Power Supply | 100 to 240 VAC, 50 to 60 Hz |
| Consumption | ≤ 30 W (without HDD and PoE off) |
| Working Temperature | -10° C to 55° C (14° F to 131° F) |


| | |
|------------------------|---|
| Working Humidity | 10% to 90% |
| Chassis | 19-inch rack-mounted 1.5U chassis |
| Dimension (W × D × H) | 440 × 391 × 75 mm (17.3"× 15.4" × 3.0") |
| Weight | ≤ 3.6 kg (without HDD, 7.9 lb.) |
| Certification | |
| Obtained Certification | CE, CB, REACH, WEEE, UKCA, LOA |
| CE | EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4 |

▪ Physical Interface

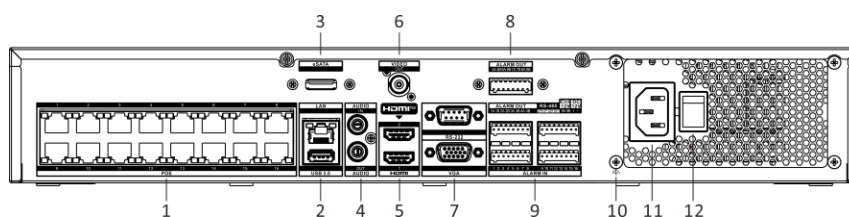

| No. | Description | No. | Description |
|-----|------------------------------|-----|---|
| 1 | PoE interfaces | 7 | VGA and RS-232 interfaces |
| 2 | USB 3.0 and LAN interfaces | 8 | ALARM OUT |
| 3 | eSATA interface | 9 | ALARM IN, ALARM OUT, RS-485, Ctrl 12V, and DC 12V |
| 4 | Audio input and audio output | 10 | GND |
| 5 | HDMI 1 and HDMI 2 interfaces | 11 | 100 to 240 VAC power supply |
| 6 | VIDEO OUT | 12 | Power switch |

▪ Dimension

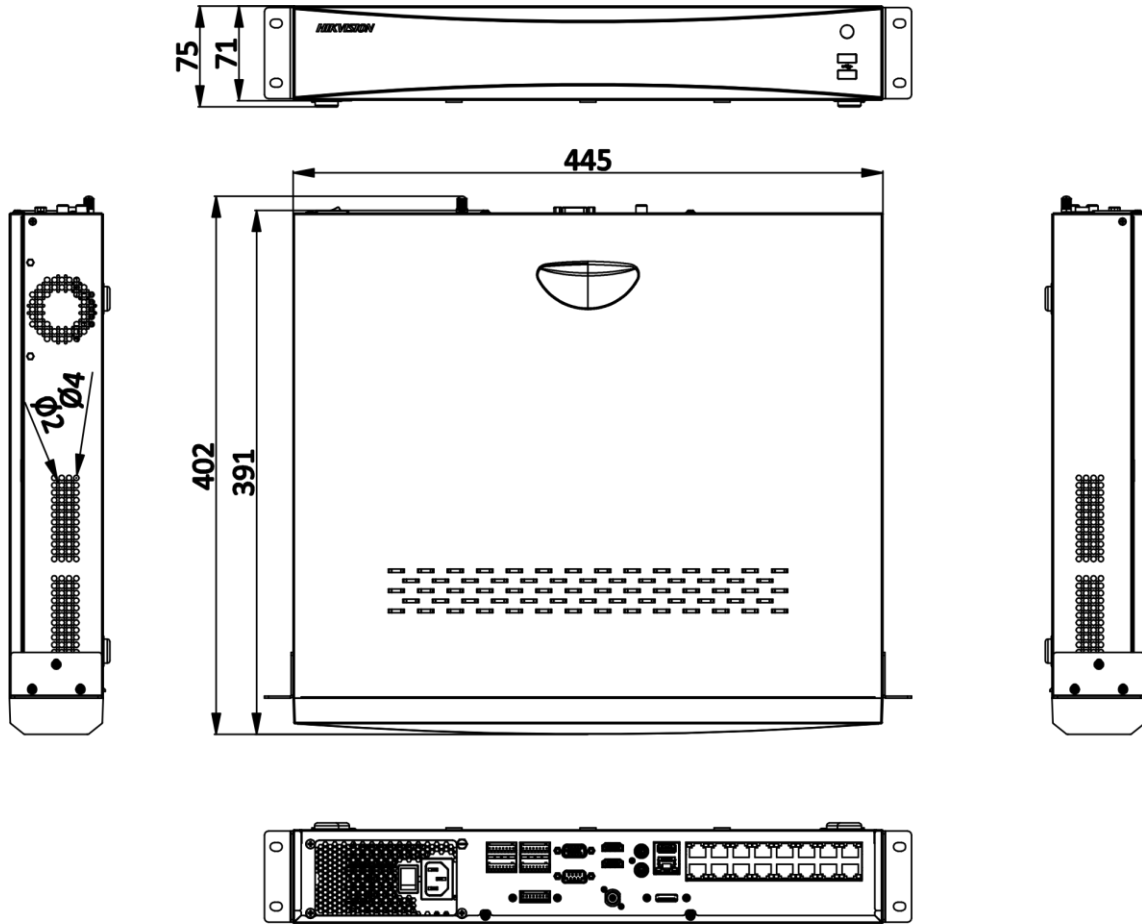

scale/1:1;Unit/mm