

POE-SWC2401G

24-Port Cloud Managed Gigabit Smart PoE Switch



Cloud-managed switches are designed for effortless management and maintenance. Our software platforms allow you to effortlessly deploy, monitor, and expand your surveillance system anytime, anywhere. With real-time network topology visualization, health monitoring, and instant device alarms, you can significantly reduce network operation and maintenance costs.

Main Features:

- 24 x gigabit PoE RJ45 ports, 1 x gigabit RJ45 port, 1 x gigabit fiber optical port
- Total PoE power budget 370 W
- Unified cloud management for security systems
- Network topology at your fingertips
- Remote troubleshooting
- Visualized topology management
- Up to 300 m long-range PoE transmission
- 6 kV surge protection
- LPP Supported*




• Specification

General	
Shell	Metal material
Net Weight	3.1 kg (6.83 lb)
Gross Weight	3.3 kg (7.27 lb)
Dimensions (W × H × D)	440.0 mm × 220.8 mm × 44.0 mm (17.32" × 8.69" × 1.73")
Operating Temperature	0 °C to 45 °C (32 °F to 113 °F)
Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Operating Humidity	5% to 95% (no condensation)
Relative Humidity	5% to 95% (no condensation)
Power Supply	100~240 V AC, 50/60 Hz, Max. 6.3 A
Installation Mode	Rack (equipped with mounting ears)
Max. Power Consumption	400 W
Power Consumption in Idle	30 W
Surge Protection	6 kV
Network Parameters	
Ports	24 × Gigabit PoE port, 1 × Gigabit RJ45 port, 1 × Gigabit fiber optical port
MAC Address Table	8 K
Switching Capacity	56 Gbps
Packet Forwarding Rate	41.66 Mpps
Internal Cache	4.1 Mbits
PoE Power Supply	
PoE Standard	IEEE 802.3af, IEEE 802.3at
PoE Power Pin	8-pin power: 1/2(-), 3/6(+), 4/5(+), 7/8(-)
PoE Port	PoE: Ports 1 to 24
Max. Port Power	30 W
PoE Power Budget	370 W
Software Function	
Long Range	Ports 1 to 24: up to 300 m. Long range performance may vary depend on camera model or cable condition.
PoE Watchdog	Ports 1 to 24: auto detect and restart the cameras that do not respond.
Link Aggregation	Link aggregation is used to aggregate multiple physical ports to form a logical port for load balancing, bandwidth expansion, and port protection. Support static link aggregation. Support 8 aggregation groups.
Loop Prevention	Loop prevention is used to prevent the switching network from forming loops, which will seriously affect network communication. Disabled by default. Support 802.1D STP. Support 802.1w RSTP.
VLAN	VLAN is used for network scale planning and network health improvement. Support 802.1Q. Configurable VLAN ID from 1-4094. Support Trunk, Access port mode. Support Max. 32 VLAN.


LPP*	<p>Support one-click activation and remote management via LPP. Functions supported:</p> <ol style="list-style-type: none"> 1. Display the port rate. 2. Display the port bandwidth utilization rate. 3. Display the PoE power usage. 4. Display topology information. 5. Display the alarm status. 6. Restart ports and devices. 7. Enable port long-range mode. 8. Remotely upgrade the device.
Port Isolation	<p>Ports 1 to 24: port isolation mode to improve network security.</p> <p>Ports in an isolation group cannot communicate with each other, but they can communicate with ports outside the isolation group.</p>
System Maintenance	<p>Support device management via web.</p> <p>Support DHCP Client. Enabled by default for dynamic assignment of management IP addresses.</p> <p>Support Super IP, which is a fixed IP address (10.180.190.200) for direct access.</p> <p>Support remote management via LPP.</p> <p>Support cable detection.</p> <p>Abnormal open circuits and short circuits as well as network cable length can be detected.</p> <p>Support 802.1ab LLDP for peer device discovery.</p> <p>Support port mirroring for fault locating.</p>

*LPP health monitoring, employee add, co-branding will require additional subscription.

▪ Example of Network Topology

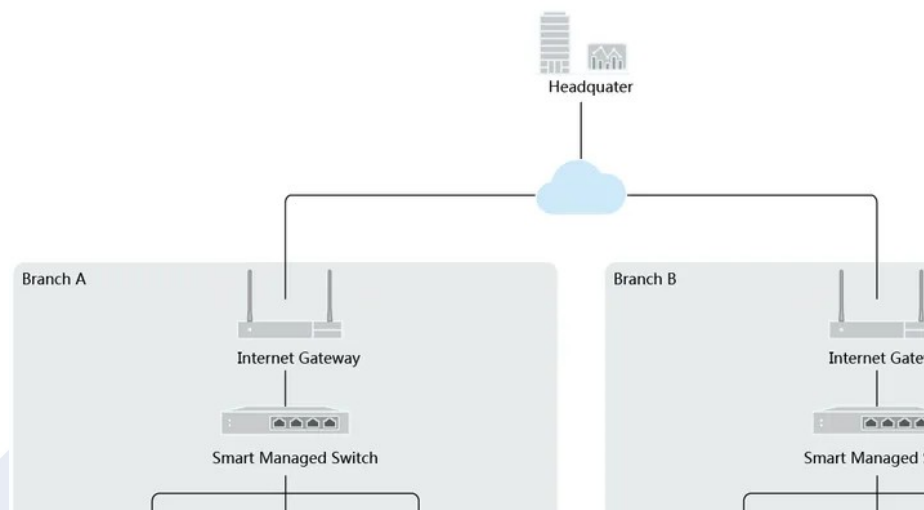

Front Panel

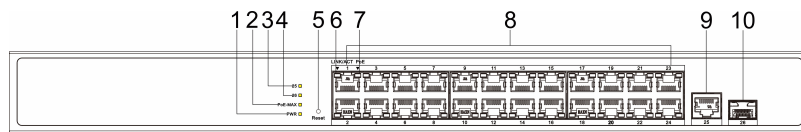

Rear Panel



No.	Indicator/Port	Description
1	PWR Indicator	<ul style="list-style-type: none"> ● Solid on: The switch is powered on normally. ● Unlit: No power supply is connected or power supply is abnormal.
2	PoE-MAX Indicator	<ul style="list-style-type: none"> ● Solid on/Flashing: The output power of the switch is about to reach or has reached the upper limit. The power supply may be abnormal if more devices are connected. ● Unlit: The switch does not supply power to a powered device (PD), or supplies power to a PD normally and its output power does not reach the upper limit. (About 5 seconds after the output power of the switch returns to normal, the PoE-MAX indicator will be unlit.)
3	Gigabit RJ45 Port Indicator (Port 25)	<ul style="list-style-type: none"> ● Solid on: The port is connected. ● Flashing: The port is transmitting data. ● Unlit: The port is disconnected or connection is abnormal.
4	Gigabit SFP Fiber Optical Port Indicator (Port 26)	<ul style="list-style-type: none"> ● Solid on: The gigabit SFP fiber optical port is connected. ● Flashing: The gigabit SFP fiber optical port is transmitting data. ● Unlit: The gigabit SFP fiber optical port is disconnected or connection is abnormal.
5	Reset Button	Used for restoring all the configurations of the switch to the default settings.
6	LINK/ACT Indicator	<ul style="list-style-type: none"> ● Solid on: The port is connected. ● Flashing: The port is transmitting data. ● Unlit: The port is disconnected or connection is abnormal.
7	PoE Indicator	<ul style="list-style-type: none"> ● Solid on: The switch supplies power to a PD normally. ● Unlit: The switch is disconnected from a PD or power supply is abnormal.
8	Gigabit PoE RJ45 Port	Used for connection to a PD via a network cable.
9	Gigabit RJ45 Port (Port 25)	Used for connection to another device via a network cable.
10	Gigabit SFP Fiber Optical Port (Port 26)	Used for connection to another device via an optical fiber when plugged into with an optical module.
11	Grounding Terminal	Used for connecting to the grounding cable to protect the switch from lightning.

12	Power Supply	Use the attached power cord to connect the switch to a socket.
----	--------------	--



▪ Dimension

