



# Platinum 2.1MP Network Mini Wifi Bullet Camera CMIP8222-WIFI



## Key Features:

- 2.1MP High Definition
- Support Wifi
- 3D DNR,BLC,DWDR
- IP67
- Built-in Micro SD / SDHC / SDXC card slot, up to 128GB
- DC 12V/ PoE

## Dimensions:

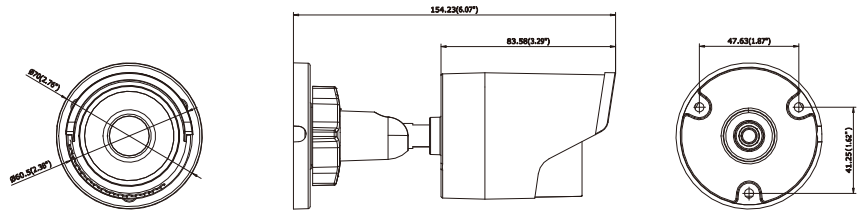

# Platinum 2.1MP Network Mini Wifi Bullet Camera

## CMIP8222-WIFI

CAMERA	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	0.01Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Speed	1/3 s to 1/100,000s
Lens	4mm, Angle of view: 85 °
Lens Mount	M12
Day & Night	IR cut filter with auto switch
DNR	3D DNR
Wide Dynamic Range	Digital WDR
Compression Standard	
Video Compression	H.264 / MJPEG
H.264 Type	Main Profile
Video Bit Rate	32 Kbps ~ 8 Mbps
Dual streams	Support
Image	
Max. Resolution	1920 × 1080
Frame Rate	60Hz: 30fps (1920 × 1080), 30fps (1280 × 960), 30fps (1280 × 720) 50Hz: 25fps (1920 × 1080), 25fps (1280 × 960), 25fps (1280 × 720)
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
BLC	Support, zone configurable
ROI Codec	Support
Network	
Network Storage	NAS (Support NFS, SMB/CIFS)
Detection	Intrusion detection, Line crossing detection, Motion detection, Dynamic analysis
Alarm Trigger	Tampering alarm, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
General	One-key reset, Anti-Flicker, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, Anonymous access
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
Interface	
Communication Interface	1 RJ45 10M/100M Ethernet port
Reset	Yes
On-board storage	Built-in Micro SD/SDHC/SDXC card slot, up to 128 GB

# Platinum 2.1MP Network Mini Wifi Bullet Camera

## CMIP8222-WIFI

Wi-Fi Specification	
Wireless Standards	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	20/40MHz Support
Protocols	802.11b: CCK, QPSK, BPSK
	802.11g/n: OFDM
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS
Transfer Rates	11b: 11Mbps/11g: 54Mbps/11n: up to 150Mbps
Wireless Range	50m(depend on environment)
General	
Working Temperature /Humidity	-22 °F ~ 140 °F (-30 °C ~ 60 °C)
	Humidity 95% or less (non-condensing)
Power Supply	DC12V ±10%, PoE (802.3af)
Power Consumption	Max. 5.8W
Material	Front Cover: Plastic; Back Cover&Bracket: Metal
IR Range	Approx. 100ft (30 meters)
Weather Proof Ratings	IP67
Dimensions	Φ2.8" ×6.1" ( Φ70.0 ×154.2 mm)
Weight	1.1 lbs (500g)